



**CAPACITORS, FIXED, CHIPS, HIGH VOLTAGE (1 to 3kV),
CERAMIC DIELECTRIC, TYPE II
BASED ON TYPES 1812 AND 1825
ESCC Detail Specification No. 3009/034**

DRAFT

Issue 3 Draft A	June 2012
-----------------	-----------



LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2012. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly by the use and application of this ESCC publication.

This publication, without prior permission of the European Space Agency and provided it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.



DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
TBD	Specification updated to incorporate editorial and technical changes per DCR.

**TABLE OF CONTENTS**

1.	GENERAL	5
1.1	SCOPE	5
1.2	APPLICABLE DOCUMENTS	5
1.3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	5
1.4	THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS	5
1.4.1	The ESCC Component Number	5
1.4.2	Component Type Variants and Range of Components	6
1.5	MAXIMUM RATINGS	7
1.6	PHYSICAL DIMENSIONS	7
1.7	FUNCTIONAL DIAGRAM	7
1.8	MATERIALS AND FINISHES	8
2.	REQUIREMENTS	8
2.1	GENERAL	8
2.1.1	Deviations from the Generic Specification	8
2.2	MARKING	8
2.3	ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES	9
2.3.1	Room Temperature Electrical Measurements	9
2.3.2	High and Low Temperatures Electrical Measurements	9
2.4	INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS	10

1. GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics, and test and inspection data for the component type variants and/or the range of components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

1.2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

(a) ESCC Generic Specification No. 3009.

1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 shall apply.

1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS

1.4.1 The ESCC Component Number

The ESCC Component Number shall be constituted as follows:

Example: 300903401102

- Detail Specification Reference: 3009034
- Component Type Variant Number: 01 (as required)
- Characteristic code: Capacitance Value (1000pF): 102 (as required)

1.4.1.1 *Characteristics and Ratings Codes*

Characteristics and ratings to be codified as part of the ESCC Component Number shall be as follows:

(a) Rated Capacitance Value C_n expressed by means of the following codes in accordance with ESCC Basic Specification No. 21700. The unit quantity shall be picofarad (pF).

Capacitance Value C_n (pF)	Code
XX 10 ¹	XX1
XX 10 ²	XX2
XX 10 ³	XX3

1.4.2 Component Type Variants and Range of Components

The component type variants and range of components applicable to this specification are as follows:

Variant Number	Style	Capacitance Range (pF) (Note 1)	Tolerance (± %)	Rated Voltage U _R (V)	Dimensions (mm) (Note 2)				Termination Finish	Weight Max (g)
					L Max	l Min	l Max	e Max		
01	1812	3900 to 22000	10	1000	5	2.8	3.6	3	No finish	0.3
02	1812	3900 to 22000	20	1000	5	2.8	3.6	3	No finish	0.3
03	1812	1500 to 1800	10	2000	5	2.8	3.6	3	No finish	0.3
04	1812	1500 to 1800	20	2000	5	2.8	3.6	3	No finish	0.3
05	1812	820 to 1000	10	3000	5	2.8	3.6	3	No finish	0.3
06	1812	820 to 1000	20	3000	5	2.8	3.6	3	No finish	0.3
07	1825	27000 to 5600	10	1000	5	5.67	6.67	3.3	No finish	0.6
08	1825	27000 to 5600	20	1000	5	5.67	6.67	3.3	No finish	0.6
09	1825	2200 to 6800	10	2000	5	5.67	6.67	3.3	No finish	0.6
10	1825	2200 to 6800	20	2000	5	5.67	6.67	3.3	No finish	0.6
11	1825	820 to 3900	10	3000	5	5.67	6.67	3.3	No finish	0.6
12	1825	820 to 3900	20	3000	5	5.67	6.67	3.3	No finish	0.6
13	1812	3900 to 22000	10	1000	5.5	2.8	4.1	3.5	Sn62 solder	0.3
14	1812	3900 to 22000	20	1000	5.5	2.8	4.1	3.5	Sn62 solder	0.3
15	1812	1500 to 1800	10	2000	5.5	2.8	4.1	3.5	Sn62 solder	0.3
16	1812	1500 to 1800	20	2000	5.5	2.8	4.1	3.5	Sn62 solder	0.3
17	1812	820 to 1000	10	3000	5.5	2.8	4.1	3.5	Sn62 solder	0.3
18	1812	820 to 1000	20	3000	5.5	2.8	4.1	3.5	Sn62 solder	0.3
19	1825	27000 to 5600	10	1000	5.5	5.67	7.17	3.8	Sn62 solder	0.6
20	1825	27000 to 5600	20	1000	5.5	5.67	7.17	3.8	Sn62 solder	0.6
21	1825	2200 to 6800	10	2000	5.5	5.67	7.17	3.8	Sn62 solder	0.6
22	1825	2200 to 6800	20	2000	5.5	5.67	7.17	3.8	Sn62 solder	0.6
23	1825	820 to 3900	10	3000	5.5	5.67	7.17	3.8	Sn62 solder	0.6
24	1825	820 to 3900	20	3000	5.5	5.67	7.17	3.8	Sn62 solder	0.6

NOTES:

1. Available capacitance values are as follows:
 - Value series: E12
2. See Physical Dimensions.

1.5 MAXIMUM RATINGS

The maximum ratings shall not be exceeded at any time during use or storage.


Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.

Characteristics	Symbols	Maximum Ratings	Units	Remarks
Rated Voltage	U_R	1000, 2000, 3000	V	Note 1
Operating Temperature Range	T_{op}	-55 to +125	°C	Without derating. T_{amb}
Storage Temperature Range	T_{stg}	-55 to +125	°C	
Soldering Temperature	T_{sol}	+260	°C	Note 2

NOTES:

- As required; See Component Type Variants and Range of Components.
- Duration 5 seconds maximum.

1.6 PHYSICAL DIMENSIONS

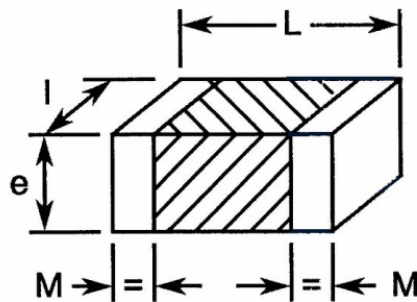

Symbols	Dimensions (mm)	
	Min	Max
L	4.2	Note 1
I	Note 1	Note 1
e	-	Note 1
M	0.25	0.75

NOTES:

- See Component Type Variants and Range of Components for dimensions L Max, I Min, I Max, e Max.

1.7 FUNCTIONAL DIAGRAM



1.8 MATERIALS AND FINISHES

The components shall be terminated with metallised pads. The termination finish shall be as specified in Component Type Variants and Range of Components.

2. REQUIREMENTS

2.1 GENERAL

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

2.1.1 Deviations from the Generic Specification

None.

2.2 MARKING

The marking shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and as follows.

The information to be marked on the component shall be:

- (a) The ESCC qualified components symbol (for ESCC qualified components only).
- (b) The ESCC Component Number.
- (c) Traceability information.

2.3 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES

Electrical measurements shall be performed at room, high and low temperatures.

2.3.1 Room Temperature Electrical Measurements

The measurements shall be performed at $T_{amb} = +22 \pm 3^{\circ}C$.

Characteristics	Symbols	Test Method and Conditions	Tolerance (\pm %)	Limits		Units
				Min	Max	
Capacitance (Note 1)	C_A	ESCC No. 3009	10 20	$0.9C_n$ $0.8C_n$	$1.1C_n$ $1.2C_n$	pF
Tangent of Loss Angle	$tg\delta$	ESCC No. 3009	All	-	25×10^{-3}	-
Insulation Resistance	R_I	ESCC No. 3009 For $C_n \leq 10000pF$ For $C_n > 10000pF$	All	100 1000	- -	G Ω M Ω . μF
Voltage Proof	VP	ESCC No. 3009 For $U_R < 1250V$ For $U_R > 1250V$	All	$1.5U_R$ $1.3U_R$	- -	V

2.3.2 High and Low Temperatures Electrical Measurements

Characteristics	Symbols	Test Method and Conditions (Note 1)	Limits		Units
			Min	Max	
Temperature Characteristic	TC	ESCC No. 3009 Note 2 For $V_T = \text{no voltage applied}$ For $V_T = 500V$	-20 -50	+20 +30	%

NOTES:

1. The measurements shall be performed on a sample of 5 components from each manufacturing lot with 0 failures allowed. In the event of any failure a 100% inspection may be performed.
2. In the case of a 100% inspection, a 1% total percent defective is allowed.

2.4 INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22\pm 3^{\circ}\text{C}$.

Unless otherwise specified the test methods and test conditions shall be as per the corresponding test defined in Room Temperature Electrical Measurements.

Test Reference per ESCC No. 3009	Characteristics	Symbols	Limits		Units
			Min	Max	
Mounting Final Measurements	Capacitance Tangent of Loss Angle Insulation Resistance	C_A $\text{tg}\delta$ R_I	Record Values Note 1 Note 1		
Robustness of Terminations Final Measurements	Capacitance	C_A	Note 1		
Climatic Test Sequence Initial Measurements	Capacitance	C_A	Notes 1, 2		
Final Measurements	Capacitance Change in Capacitance Tangent of Loss Angle Insulation Resistance: For $C_n \leq 10000\text{pF}$ For $C_n > 10000\text{pF}$	C_A $\Delta C_A/C_A$ $\text{tg}\delta$ R_I R_I	-10 - 3 30	+10 50×10^{-3} - -	% - GΩ MΩ.μF
Rapid Change of Temperature Initial Measurements	Capacitance	C_A	Notes 1, 2		
Final Measurements	Capacitance Change in Capacitance Tangent of Loss Angle	C_A $\Delta C_A/C_A$ $\text{tg}\delta$	-10 -	+10 50×10^{-3}	% -
Damp Heat Steady State Initial Measurements	Capacitance	C_A	Notes 1, 2		
Final Measurements	Capacitance Change in Capacitance Tangent of Loss Angle Insulation Resistance: For $C_n \leq 10000\text{pF}$ For $C_n > 10000\text{pF}$	C_A $\Delta C_A/C_A$ $\text{tg}\delta$ R_I R_I	-10 - 3 30	+10 50×10^{-3} - -	% - GΩ MΩ.μF

Test Reference per ESCC No. 3009	Characteristics	Symbols	Limits		Units
			Min	Max	
Operating Life Initial Measurements	Capacitance	C_A	Notes 1, 2		
Intermediate Measurements (1000 hours)	Capacitance	C_A	Note 1		
	Change in Capacitance	$\Delta C_A / C_A$	-15	+15	%
	Insulation Resistance: For $C_n \leq 10000\text{pF}$	R_I	10	-	GΩ
	For $C_n > 10000\text{pF}$	R_I	100	-	MΩ.μF
Final Measurements (2000 hours)	Capacitance	C_A	Note 1		
	Change in Capacitance	$\Delta C_A / C_A$	-15	+15	%
	Tangent of Loss Angle	$\text{tg}\delta$	-	50×10^{-3}	-
	Insulation Resistance: For $C_n \leq 10000\text{pF}$	R_I	10	-	GΩ
	For $C_n > 10000\text{pF}$	R_I	100	-	MΩ.μF
	Voltage Proof	VP	Note 1		
Capacitance-Temperature Characteristics	Temperature Characteristic	TC	Note 3		

NOTES:

1. As specified in Room Temperature Electrical Measurements.
2. Capacitance values recorded during Mounting may be used as initial measurements.
3. As specified in High and Low Temperatures Electrical Measurements.



APPENDIX A
AGREED DEVIATIONS FOR AVX LTD (GB)

Items Affected	Description of Deviations
Deviations from Generic Specification: Special In-Process Controls (Chart F2)	Microsection Inspection: may be performed using AVX document COL/EMP/04-20 (issue as per PID).