


FIGURE 2(b) – STRAIGHT CABLE CLAMP

Wire bundle accommodation range

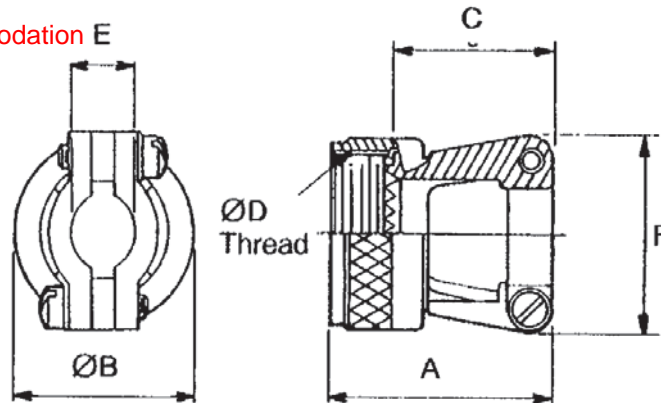

Sizes	A Max.		ØB Max.		C Max.	ØD		E (3)		F Max.
	(1)	(2)	(1)	(2)		(1) UNEF-2B	(2)	Min.	Max.	
08/09	27.5	27.9	19.1	21.79	23.1	0.4375-28	M12 × 1-6H	2.49	5.94	21.6
10/11	27.9	27.9	21.5	24.99	23.1	0.5625-24	M15 × 1-6H	3.87	5.94	22.9
12/13	30.5	30.5	25.4	29.39	25.7	0.6875-24	M18 × 1-6H	4.83	8.33	27.9
14/15	31.8	31.8	27.9	32.49	26.9	0.8125-20	M22 × 1-6H	6.6	11.61	29.2
16/17	34.3	34.3	31.8	35.71	29.5	0.9375-20	M25 × 1-6H	7.19	15.6	33.5
18/19	40.6	40.6	35.6	38.5	35.8	1.0625-18	M28 × 1-6H	8.26	16.1	38.1
20/21	43.2	43.2	38.1	41.7	38.4	1.1875-18	M31 × 1-6H	8.71	17.73	40.6
22/23	47	47	41.9	44.91	42.2	1.3125-18	M34 × 1-6H	9.68	20.9	43.2
24/25	49.5	49.5	44.5	47.98	47.7	1.4375-18	M37 × 1-6H	10.62	21.67	45.7

NOTES:

1. Variants 10 to 18.
2. Variants 37 to 45.
3. Wire dundle accommodation range dimension is defined as the envelope area of the wire bundle. Dimension is not meant to define the clamp hardware limits.