


FIGURE 2(c) – 90° CABLE CLAMP

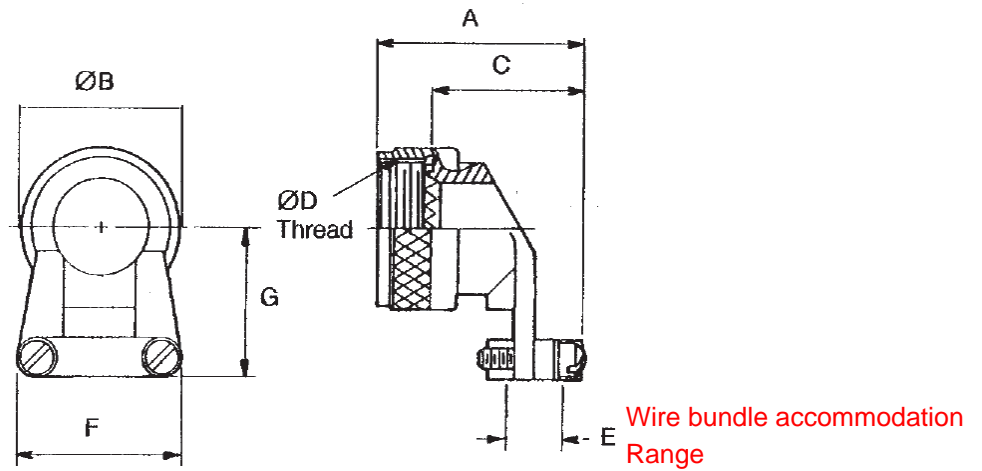


Sizes	A Max.		ØB Max.		C Max.		ØD		E (3)		F Max.	G Max.
	(1)	(2)	(1)	(2)	(1)	(2)	(1) UNEF-2B	(2)	Min.	Max.		
08/09	35.1	30.5	21.79	19.1	29.5	25.7	0.4375-28	M12 × 1-6H	2.49	5.94	21.6	25.4
10/11	35.1	30.5	24.99	21.6	29.5	25.7	0.5625-24	M15 × 1-6H	3.87	5.94	22.9	27.9
12/13	37.1	35.6	29.39	25.4	31.5	30.7	0.6875-24	M18 × 1-6H	4.83	8.33	27.9	27.9
14/15	41.4	36.8	32.4	27.9	35.8	32	0.8125-20	M22 × 1-6H	6.6	11.61	29.2	31.8
16/17	45.7	40.6	35.7	31.8	40.1	35.8	0.9375-20	M25 × 1-6H	7.19	15.6	33.5	33
18/19	46.2	43.2	38.5	35.6	40.6	38.4	1.0625-18	M28 × 1-6H	8.26	16.1	38.1	38.1
20/21	48.3	47	41.7	38.1	42.7	42.2	1.1875-18	M31 × 1-6H	8.71	17.73	40.6	40.6
22/23	51.1	49.5	44.91	41.9	46.2	44.7	1.3125-18	M34 × 1-6H	9.68	20.9	43.2	44.5
24/25	54.6	53.3	47.98	44.5	49	48.5	1.4375-18	M37 × 1-6H	10.62	21.67	45.7	47

NOTES:

1. Variants 19 to 27.
2. Variants 46 to 54.
3. Wire bundle accommodation range dimension is defined as the envelope area of the wire bundle
Dimension is not meant to define the clamp hardware limits.

FIGURE 2(d) – TERMINATION AND BACKSHELL

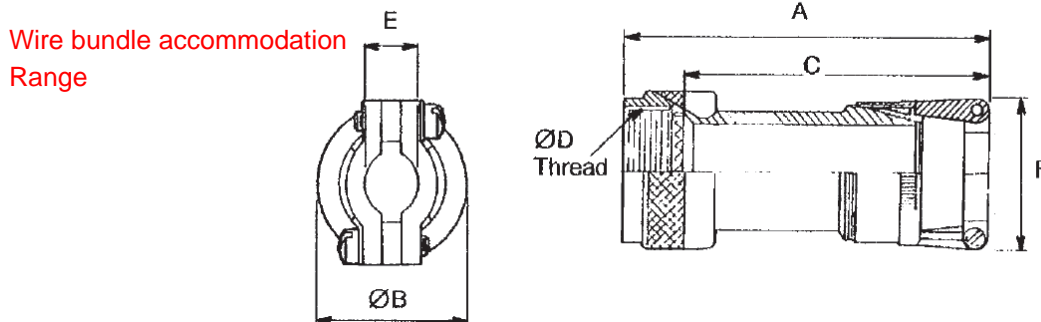

Sizes	A Max.	ØB Max.	C Max.	ØD	E (3)		F Max.
					Min.	Max.	
17	77	31.8	71.4	M25 × 1-6H	6.4	9.5	27.9