


FIGURE 2(b) - STANDARD DENSITY CONTACT ARRANGEMENTS - FRONT VIEW MALE INSERT (3)

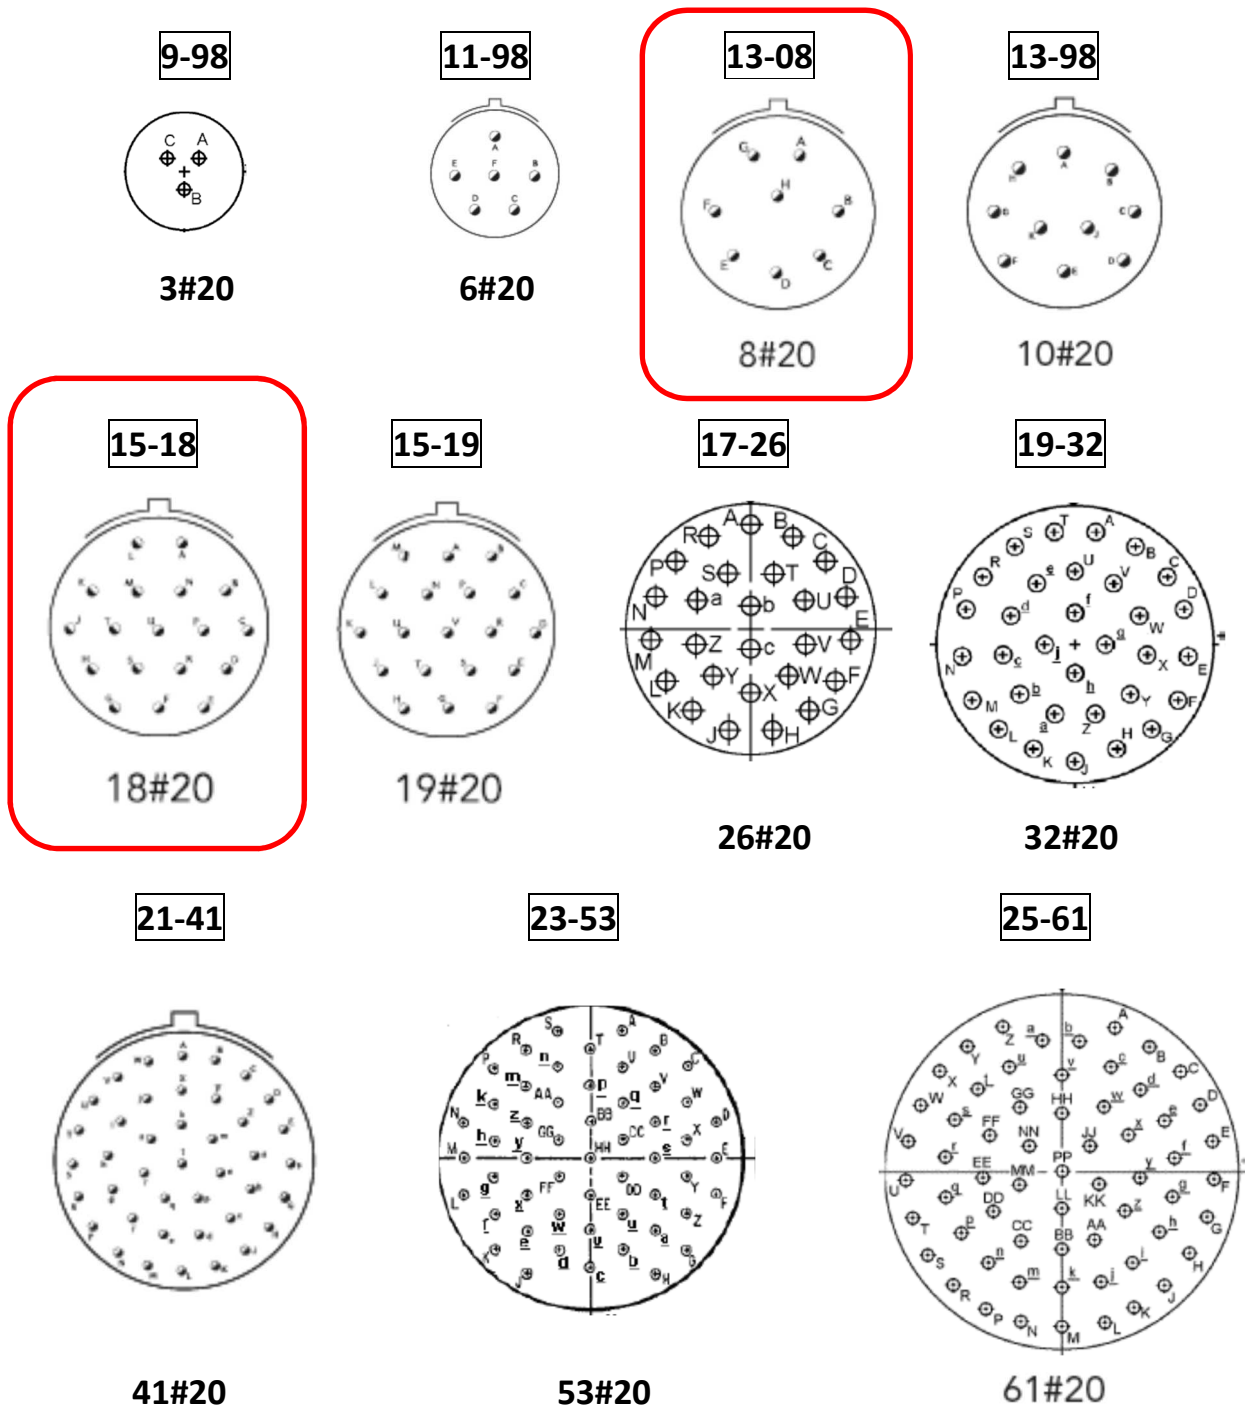

NOTES:

1. Contact locations and identifications in conformity with MIL-STD-1560.
2. Both sides of the inserts shall be marked.
3. For feedthrough receptacles, the view is from the mounting-nut side.