



**CAPACITORS, VARIABLE, CONCENTRIC  
TRIMMER, AIR DIELECTRIC, 1 TO 30pF, BODY  
DIAMETER 8mm**

**ESCC Detail Specification No. 3010/009**

Issue 2	July 2018
---------	-----------



**LEGAL DISCLAIMER AND COPYRIGHT**

European Space Agency, Copyright © 2018. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

**DOCUMENTATION CHANGE NOTICE**

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
1165	Specification updated to incorporate changes per DCR.

**TABLE OF CONTENTS**

1	GENERAL	5
1.1	SCOPE	5
1.2	APPLICABLE DOCUMENTS	5
1.3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	5
1.4	THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS	5
1.4.1	The ESCC Component Number	5
1.4.2	Component Type Variants	5
1.5	MAXIMUM RATINGS	6
1.6	PHYSICAL DIMENSIONS	7
1.6.1	Component Type Variant 01 (Lug Panel Mount)	7
1.6.2	Component Type Variant 02 (Turret Panel Mount)	8
1.6.3	Component Type Variant 03 (PCB Mount)	9
1.7	FUNCTIONAL DIAGRAM	9
1.8	MATERIALS AND FINISHES	9
1.8.1	Case	9
1.8.2	Terminals	9
2	REQUIREMENTS	10
2.1	GENERAL	10
2.1.1	Deviations from the Generic Specification	10
2.1.1.1	Deviations from Screening Tests – Chart F3	10
2.2	MARKING	10
2.3	ROBUSTNESS OF TERMINATIONS	10
2.4	RESISTANCE TO SOLDERING HEAT	10
2.5	ELECTRICAL AND MECHANICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES	11
2.5.1	Room Temperature Electrical and Mechanical Measurements	11
2.5.2	High and Low Temperatures Electrical Measurements	11
2.6	INTERMEDIATE AND END-POINT ELECTRICAL AND MECHANICAL MEASUREMENTS	12
2.7	OPERATING LIFE CONDITIONS	15
	APPENDIX 'A'	16

**1 GENERAL**

**1.1 SCOPE**

This specification details the ratings, physical and electrical characteristics, and test and inspection data for the component type variants specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

**1.2 APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. [3010](#).

**1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS**

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. [21300](#) shall apply.

**1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS**

**1.4.1 The ESCC Component Number**

The ESCC Component Number shall be constituted as follows:

Example: 301000901

- Detail Specification Reference: 3010009
- Component Type Variant Number: 01 (as required)

**1.4.2 Component Type Variants**

The Component Type Variants applicable to this specification are as follows:

Type Variant	Minimum and Maximum Specified Capacitance (pF)		Case Description (Note 1)	Weight Max (g)
	Cm	CM		
01	1	30	Lug Panel Mount	4.5
02	1	30	Turret Panel Mount	4.5
03	1	30	PCB Mount	4.5

**NOTES:**

1. See Para. 1.6 for Physical Dimensions.

**1.5** MAXIMUM RATINGS

The maximum ratings shall not be exceeded at any time during use or storage.

Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.

Characteristics	Symbols	Maximum Ratings	Units	Remarks
Rated Voltage	$U_R$	250	V	
Operating Temperature Range	$T_{op}$	-55 to +125	°C	$T_{amb}$
Storage Temperature Range	$T_{stg}$	-55 to +125	°C	
Soldering Temperature	$T_{sol}$	+260	°C	Note 1
Panel Mounting Nut Tightening Torque	-	40	N.cm	Notes 2, 3
Sealing Cap Tightening Torque	-	10	N.cm	Note 3


**NOTES:**

1. Duration 5 seconds maximum.
2. Only applicable to Variants 01 and 02.
3. Handling precautions are as follows:
  - An appropriate turning tool must be used.
  - The rotor shall not be disconnected from the stator.
  - When cleaning with solvent, the sealing cap must be correctly fitted and tightened to the rated torque.
  - The sealing cap, which is supplied with all units, must be removed from all flight units prior to flight.

1.6 PHYSICAL DIMENSIONS

Note: The sealing cap is intentionally omitted from the case drawings.


1.6.1 Component Type Variant 01 (Lug Panel Mount)

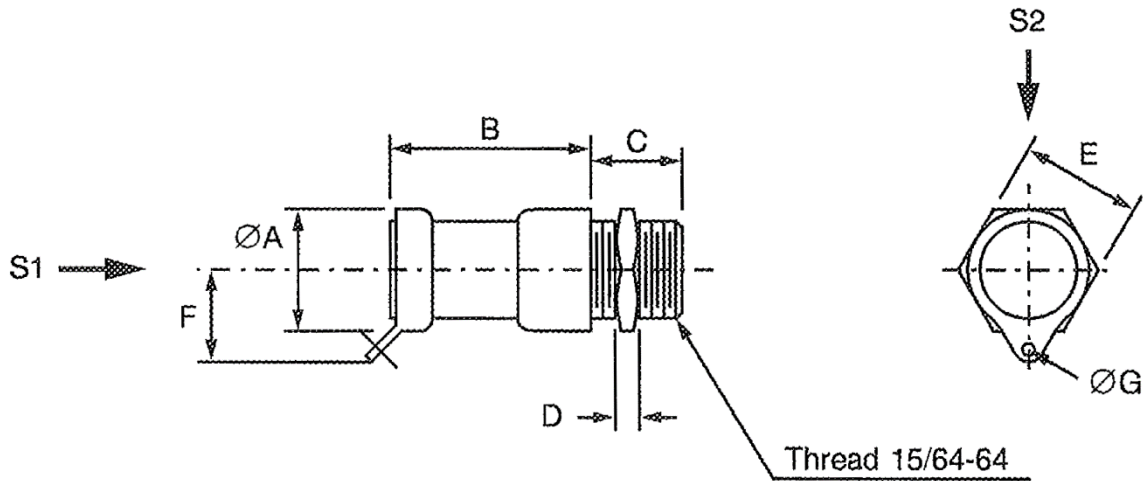

S1, S2 – Vibration and Shock axes

Symbols	Dimensions (mm)	
	Min	Max
$\varnothing A$	-	8
B	-	17.3
C	5.31	5.41
D	0.9	1.1
E	6.9	7.1
F	-	6
$\varnothing G$	1.1	1.3

1.6.2 Component Type Variant 02 (Turret Panel Mount)

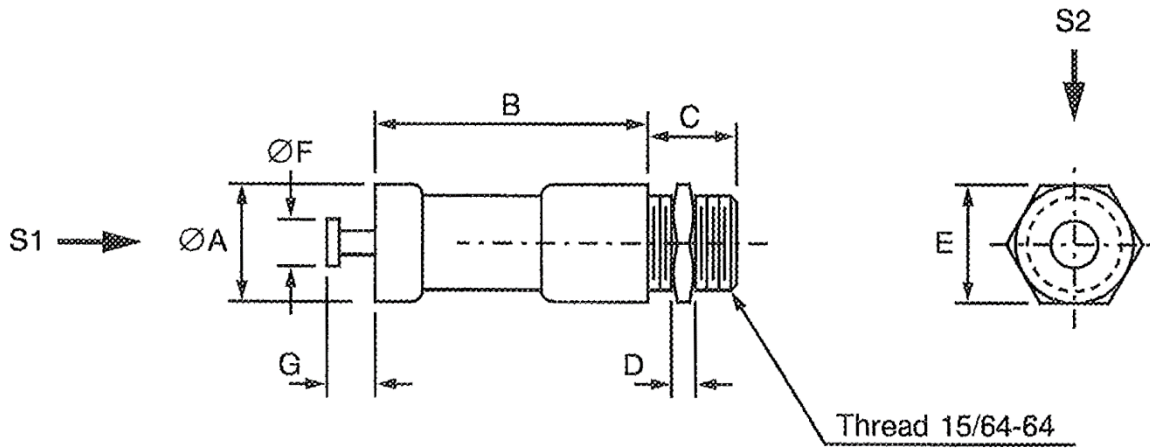


S1, S2 – Vibration and Shock axes

Symbols	Dimensions (mm)	
	Min	Max
ØA	-	8
B	17.1	17.5
C	5.31	5.41
D	0.9	1.1
E	6.9	7.1
ØF	2.2	2.4
G	2.6	3




1.6.3 Component Type Variant 03 (PCB Mount)

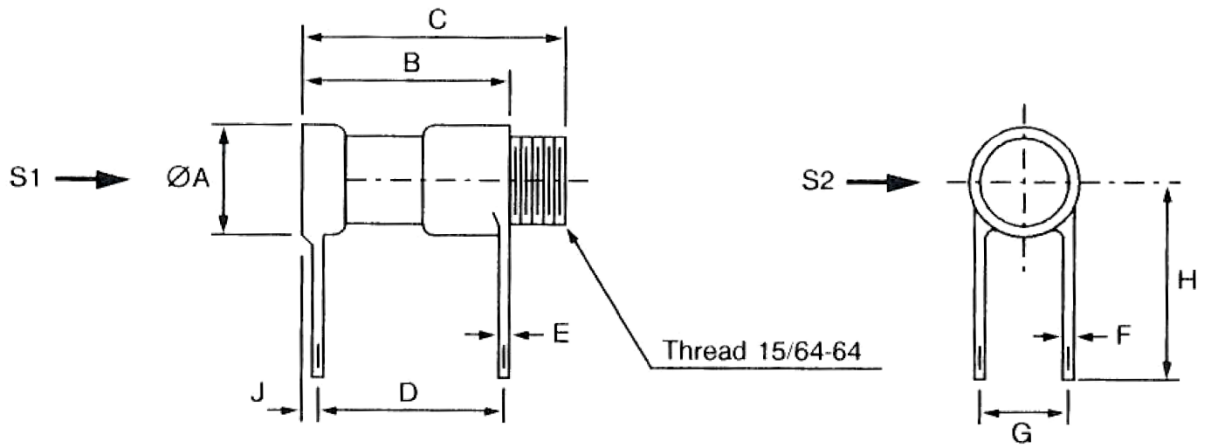

S1, S2 – Vibration and Shock axes

Symbols	Dimensions (mm)	
	Min	Max
$\varnothing A$	-	8
B	19.2	19.6
C	22.4	22.8
D	18.6	19
E	0.35	0.45
F	0.75	0.85
G	5.55	5.65
H	12	-
J	-	0.5

1.7 FUNCTIONAL DIAGRAM



1.8 MATERIALS AND FINISHES

1.8.1 Case

The body of the components shall be ceramic.

1.8.2 Terminals

Terminals shall be either gold plated or tinned.

## 2 REQUIREMENTS

### 2.1 GENERAL

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

#### 2.1.1 Deviations from the Generic Specification

##### 2.1.1.1 *Deviations from Screening Tests – Chart F3*

- (a) Burn-in: Not applicable.

### 2.2 MARKING

The marking shall be in accordance with the requirements of ESCC Basic Specification No. [21700](#) and as follows.

The information to be marked on the component or its primary package shall be:

- (a) The ESCC qualified components symbol (for ESCC qualified components only).
- (b) The ESCC Component Number.
- (c) Traceability information.

### 2.3 ROBUSTNESS OF TERMINATIONS

Component Type Variant 03 shall be subjected to Robustness of Terminations as specified in the ESCC Generic Specification.

Not applicable to Component Type Variants 01, 02.

### 2.4 RESISTANCE TO SOLDERING HEAT

The test conditions for Resistance to Soldering Heat are as follows:

- Immersion depth: To within 1mm from the body.
- Immersion time: 3.5 ±0.5 seconds.

**2.5 ELECTRICAL AND MECHANICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES**

Electrical and mechanical measurements shall be performed at room, high and low temperatures.

**2.5.1 Room Temperature Electrical and Mechanical Measurements**

The measurements shall be performed at  $T_{amb} = +22 \pm 3^{\circ}C$ .

Characteristics	Symbols	Test Method and Conditions	Limits		Units
			Min	Max	
Minimum Capacitance	Cm	ESCC No. 3010 Frequency: 1 $\pm$ 0.1MHz	-	1	pF
Maximum Capacitance	CM	ESCC No. 3010 Frequency: 1 $\pm$ 0.1MHz	30	-	pF
Change in Capacitance	-	ESCC No. 3010 Frequency: 1 $\pm$ 0.1MHz	Note 1		-
Insulation Resistance	R <sub>i</sub>	ESCC No. 3010 Test voltage = 500 $\pm$ 25V	10 <sup>6</sup>	-	MΩ
Voltage Proof	VP	ESCC No. 3010	500	-	V
Quality Factor	Q	ESCC No. 3010 Frequency: 100 $\pm$ 5MHz Note 2	800	-	-
Operating Torque	T <sub>qo</sub>	ESCC No. 3010 C minimum to maximum	0.7	3.5	N.cm

**NOTES:**

1. The rate of change in capacitance as a function of the change in adjustment shall not change sign over the entire range of adjustment.
2. For Screening Tests, Quality Factor shall be performed on a randomly selected sample of 3 components with no failures allowed.

**2.5.2 High and Low Temperatures Electrical Measurements**

Characteristics	Symbols	Test Method and Conditions (Note 1)	Limits		Units
			Min	Max	
Insulation Resistance	R <sub>i</sub>	ESCC No. 3010 Test voltage = 500 $\pm$ 25V $T_{amb} = +125 (+0 -3)^{\circ}C$	10 <sup>5</sup>	-	MΩ
Temperature Coefficient	TC	ESCC No. 3010 Note 2			10 <sup>-6</sup> /°C
		Between -55°C and +22°C	-30	+30	
		Between +22°C and +125°C	-30	+30	

**NOTES:**

1. Measurements shall be performed on a sample of 5 components from each manufacturing lot with 0 failures allowed. In the event of any failure a 100% inspection may be performed.
2. Rotor set at approximately 75% of the maximum specified capacitance value.

2.6 INTERMEDIATE AND END-POINT ELECTRICAL AND MECHANICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at  $T_{amb} = +22 \pm 3^{\circ}\text{C}$ .

Unless otherwise specified the test methods and test conditions shall be as per the corresponding test defined in Para. 2.5.1, Room Temperature Electrical and Mechanical Measurements.

Test Reference per ESCC No. 3010	Characteristics	Symbols	Limits		Units
			Min	Max	
Rapid Change of Temperature Initial Measurements	Capacitance	CM & Cm	Note 1		pF
	Final Measurements	CM & Cm	Note 1		pF
	Capacitance Drift	$\Delta\text{CM}$ & $\Delta\text{Cm}$	-0.05 -0.5	+0.05 +0.5	pF or % (Note 2)
Vibration Initial Measurements	Capacitance (Note 3)	C	Record Values		pF
	Final Measurements	C	Record Values		pF
	Capacitance Drift	$\Delta\text{C}$	-0.05 -1	+0.05 +1	pF or % (Note 2)
Shock Initial Measurements	Capacitance (Note 3)	C	Record Values		pF
	Final Measurements	C	Record Values		pF
	Capacitance Drift	$\Delta\text{C}$	-0.05 -1	+0.05 +1	pF or % (Note 2)
Resistance to Soldering Heat Initial Measurements	Capacitance (Note 3)	C	Record Values		pF
	Final Measurements	C	Record Values		pF
	Capacitance Drift	$\Delta\text{C}$	-0.05 -1	+0.05 +1	pF or % (Note 2)
	Voltage Proof	VP	Note 1	-	V
	Quality Factor	Q	Note 1	-	-

Test Reference per ESCC No. 3010	Characteristics	Symbols	Limits		Units
			Min	Max	
Climatic Sequence Initial Measurements Final Measurements	Capacitance (Note 3)	C	Record Values		pF
	Capacitance (Note 3)	C	Record Values		pF
	Capacitance Drift	$\Delta C$	-0.05 -1	+0.05 +1	pF or % (Note 2)
	Quality Factor	Q	Note 1	-	-
	Insulation Resistance	$R_i$	$10^5$	-	M $\Omega$
	Voltage Proof	VP	Note 1	-	V
	Operating Torque	$T_{q0}$	Note 1		N.cm
Damp Heat, Steady State (Note 4) Initial Measurements Final Measurements	Capacitance	$C_M$ & $C_m$	Note 1		pF
	Capacitance	$C_M$ & $C_m$	Note 1		pF
	Capacitance Drift	$\Delta C_M$ & $\Delta C_m$	-0.05 -2	+0.05 +2	pF or % (Note 2)
	Quality Factor	Q	Note 1	-	-
	Insulation Resistance	$R_i C_M$ & $R_i C_m$	$10^5$	-	M $\Omega$
	Voltage Proof	VP	Note 1	-	V
	Operating Torque	$T_{q0}$	Note 1		N.cm
Operating Life Initial Measurements Intermediate Measurements (500 hours) (Note 5) (500 and 1000 hours) (Note 6)	Capacitance	$C_M$	Note 1	-	pF
	Capacitance	$C_M$	Note 1	-	pF
	Capacitance Drift	$\Delta C_M$	-0.05 -2	+0.05 +2	pF or % (Note 2)
	Insulation Resistance	$R_i C_M$	Note 1	-	M $\Omega$
	Voltage Proof	VP	Note 1	-	V
	Quality Factor	Q	Note 1	-	-
	Operating Torque	$T_{q0}$	Note 1		N.cm

Test Reference per ESCC No. 3010	Characteristics	Symbols	Limits		Units
			Min	Max	
Operating Life Final Measurements (1000 or 2000 hours) (Note 7)	Capacitance	CM	Note 1	-	pF
	Capacitance Drift	$\Delta$ CM	-0.05 -2	+0.05 +2	pF or % (Note 2)
	Insulation Resistance	R <sub>i</sub> CM	Note 1	-	M $\Omega$
	Voltage Proof	VP	Note 1	-	V
	Quality Factor	Q	Note 1	-	-
	Operating Torque	T <sub>qo</sub>	Note 1		N.cm
Axial Thrust (Note 8)					
Initial Measurements	Capacitance (Note 3)	C	Record Values		pF
Measurements during Test	Capacitance (Note 3)	C	Record Values		pF
	Capacitance Drift	$\Delta$ C	-0.05 -1	+0.05 +1	pF or % (Note 2)
Mechanical Endurance					
Measurements after Mechanical Endurance Cycling	Voltage Proof	VP	Note 1	-	V
	Change in Capacitance versus Rotation	-	Deviation $\pm$ 10% max. (Note 9)		-
Final Measurements	Operating Torque	T <sub>qo</sub>	0.35	4.75	N.cm
	Insulation Resistance (between rotor screw and mounting base)	R <sub>i</sub>	Note 1	-	M $\Omega$
	Quality Factor	Q	Note 1	-	-
Electrical and Mechanical Measurements					
	Minimum Capacitance	C <sub>m</sub>	-	Note 1	pF
	Maximum Capacitance	CM	Note 1	-	pF
	Change in Capacitance	-	Note 1		-
	Insulation Resistance	R <sub>i</sub>	Note 1	-	M $\Omega$
	Voltage Proof	VP	Note 1	-	V
	Quality Factor	Q	Note 1	-	-
	Operating Torque	T <sub>qo</sub>	Note 1		N.cm
Temperature Coefficient (Note 3)		TC			10 <sup>-6</sup> /°C
	Between -55°C and +22°C		Note 10		
	Between +22°C and +125°C		Note 10		
End-Stop Torque (Note 11)					
Final Measurements	Minimum Capacitance	C <sub>m</sub>	-	Note 1	pF
	Maximum Capacitance	CM	Note 1	-	pF

**NOTES:**

1. As specified in Para. 2.5.1.
2. Whichever is greater.

3. Measurements shall be made with the rotor set at approximately 75% of the maximum specified capacitance value.
4. Half the sample shall be measured with  $U_R$  applied and the remaining components shall be measured with no  $U_R$  applied.
5. 500 hours is applicable to Periodic Testing for extension of qualification.
6. 500 and 1000 hours is applicable to Qualification Testing, and to Periodic Testing for renewal of qualification after lapse.
7. 1000 hours is applicable to Periodic Testing for extension of qualification. 2000 hours is applicable to Qualification Testing, and to Periodic Testing for renewal of qualification after lapse.
8. Thrust: 10N
9. No reversals in direction.
10. As specified in Para. 2.5.2.
11. Torque: 5N.cm

## 2.7

OPERATING LIFE CONDITIONS

Characteristics	Symbols	Conditions	Units
Ambient Temperature	$T_{amb}$	+125 (+0 -3)	°C
Applied Voltage	$V_A$	375	V

**APPENDIX 'A'**  
**AGREED DEVIATIONS FOR EXXELIA TEMEX (F)**

Item Affected	Description of Deviations
<p>Para. 2.1.1.1, Deviations from Screening Tests – Chart F3</p>	<ul style="list-style-type: none"> <li>• Quality Factor per Electrical and Mechanical Measurements in ESCC Generic Specification No. 3010 and Para. 2.5.1 herein:  Quality Factor measurements shall be performed at frequencies comprised between 100 and 400 MHz. The value of the Quality Factor shall be determined at 100MHz by using the following formula:  <math display="block">Q_{fo} = Q_m \times (f_m/f_o)^{3/2}</math>  Where <math>Q_m</math> is the Quality Factor read at frequency <math>f_m</math> (<math>f_m</math> is that frequency where the quarter-wave line, including the capacitance being measured, is resonating) and <math>f_o = 100\text{MHz}</math>.  The record sheet shall indicate the Quality Factor at 100MHz, as specified in Para. 2.5.1, as well as the frequency <math>f_m</math> at which the Quality Factor was read.</li> </ul>
<p>Para. 2.1.1.1, Deviations from the Generic Specification</p>	<p>The following <i>Deviations from Qualification and Periodic Tests – Chart F4</i> shall apply:</p> <ul style="list-style-type: none"> <li>• Quality Factor per Electrical and Mechanical Measurements in ESCC Generic Specification No. 3010 and Para. 2.5.1 herein:  Quality Factor measurements shall be performed at frequencies comprised between 100 and 400 MHz. The value of the Quality Factor shall be determined at 100MHz by using the following formula:  <math display="block">Q_{fo} = Q_m \times (f_m/f_o)^{3/2}</math>  Where <math>Q_m</math> is the Quality Factor read at frequency <math>f_m</math> (<math>f_m</math> is that frequency where the quarter-wave line, including the capacitance being measured, is resonating) and <math>f_o = 100\text{MHz}</math>.  The record sheet shall indicate the Quality Factor at 100MHz, as specified in Para. 2.5.1, as well as the frequency <math>f_m</math> at which the Quality Factor was read.</li> <li>• Electrical Subgroup (Subgroup 3), Electrical and Mechanical Measurements: Quality Factor measurements shall be performed prior to Solderability.</li> </ul>