



**CAPACITORS, FIXED, CHIPS, CERAMIC  
DIELECTRIC, TYPE II**

**BASED ON TYPE 1210**

**ESCC Detail Specification No. 3009/009**

Issue 7	November 2021
---------	---------------



**LEGAL DISCLAIMER AND COPYRIGHT**

European Space Agency, Copyright © 2021. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

**DOCUMENTATION CHANGE NOTICE**

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
1460	Specification updated to incorporate changes per DCR.

**TABLE OF CONTENTS**

1	GENERAL	5
1.1	SCOPE	5
1.2	APPLICABLE DOCUMENTS	5
1.3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	5
1.4	THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS	5
1.4.1	The ESCC Component Number	5
1.4.2	Component Type Variants and Range of Components	6
1.5	MAXIMUM RATINGS	8
1.6	PHYSICAL DIMENSIONS	8
1.7	FUNCTIONAL DIAGRAM	8
2	REQUIREMENTS	9
2.1	GENERAL	9
2.1.1	Deviations from the Generic Specification	9
2.2	MARKING	9
2.3	ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES	9
2.3.1	Room Temperature Electrical Measurements	9
2.3.2	High and Low Temperatures Electrical Measurements	10
2.4	INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS	10
2.5	BURN-IN	12

## 1 GENERAL

### 1.1 SCOPE

This specification details the ratings, physical and electrical characteristics, and test and inspection data for the component type variants and/or the range of components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

### 1.2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. [3009](#).

### 1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. [21300](#) shall apply.

### 1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS

#### 1.4.1 The ESCC Component Number

The ESCC Component Number shall be constituted as follows:

Example: 300900901102KE

- Detail Specification Reference: 3009009
- Component Type Variant Number: 01 (as required)
- Characteristic code: Capacitance Value (1000pF): 102 (as required)
- Characteristic code: Capacitance Tolerance ( $\pm 10\%$ ): K (as required)
- Rating code: Rated Voltage (100V): E (as required)

#### 1.4.1.1 *Characteristics and Ratings Codes*

Characteristics and ratings to be codified as part of the ESCC Component Number shall be as follows:

- (a) Rated Capacitance Value,  $C_n$ , expressed by means of the following codes in accordance with ESCC Basic Specification No. [21700](#). The unit quantity shall be picofarad (pF).

Capacitance Value $C_n$ (pF)	Code
XX 10 <sup>1</sup>	XX1
XX 10 <sup>2</sup>	XX2
XX 10 <sup>3</sup>	XX3
XX 10 <sup>4</sup>	XX4
XX 10 <sup>5</sup>	XX5

- (b) Capacitance Tolerance expressed by the following codes in accordance with ESCC Basic Specification No. 21700:

Tolerance (± %)	Code Letter
5	J
10	K
20	M

- (c) Rated Voltage,  $U_R$ , expressed by the following codes:

Rated Voltage $U_R$ (V)	Code Letter
10	Y
16	X
25	A
50	C
100	E
200	G
400	K

1.4.2 Component Type Variants and Range of Components

The component type variants and range of components applicable to this specification are as follows:

Variant Number	Style	Capacitance Range, Tolerance, Rated Voltage	Terminal Material and Finish		Weight Max (g)
			End Terminations	Termination Finish	
01	1210	See Note 1	Ag/Pd	No finish (Note 2)	0.15
03	1210	See Note 1	Ag/Pd/Pt	No finish (Note 2)	0.15
05	1210	See Note 1	Ag + Ni barrier	Sn60, Sn62 or Sn63 solder dip	0.15
06	1210	See Note 1	Ag + Ni barrier	Sn/Pb plating (Note 3)	0.15
07 (Note 4)	1210	See Note 1	Ag + Ni barrier	Sn/Pb plating (Note 3)	0.15
08	1210	See Note 1	Ag + Ni barrier	Au plating (Note 2)	0.15
09 (Note 4)	1210	See Note 1	Ag/Pd	No finish (Note 2)	0.15
10 (Note 4)	1210	See Note 1	Ag/Pd/Pt	No finish (Note 2)	0.15
11 (Note 4)	1210	See Note 1	Ag + Ni barrier	Au plating (Note 2)	0.15

**NOTES:**

1. Available rated voltages, capacitance values and tolerances are as follows:

Rated Voltage $U_R$ (V)	Capacitance Range $C_n$ (pF)		Tolerance ( $\pm$ %)	Value Series
	Min	Max		
400	680	22000	5	E24
			10	E12
			20	E6
200	680	100000	5	E24
			10	E12
			20	E6
100	1000	470000	5	E24
			10	E12
			20	E6
50	1000	390000	5	E24
			10	E12
		330000	20	E6
25	1000	560000	5	E24
			10	E12
		470000	20	E6
16	1000	820000	5	E24
			10	E12
		680000	20	E6
10	2200	2200000	5	E24
			10	E12
			20	E6

Any capacitance value in the capacitance range may be available on request.

2. Variants 01, 03, 08, 09, 10 and 11 are not suitable for solder assembly methods. They shall be assembled using glue or wire bond techniques.
3. Sn/Pb plating with tin content of 50% minimum and 97% maximum, remainder lead.
4. Variants 07, 09, 10 and 11 have X7R dielectric; see Para. 2.3.2 High and Low Temperatures Electrical Measurements.

1.5 MAXIMUM RATINGS

The maximum ratings shall not be exceeded at any time during use or storage.


Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.

Characteristics	Symbols	Maximum Ratings	Units	Remarks
Rated Voltage	$U_R$	10, 16, 25, 50, 100, 200, 400	V	Note 1
Operating Temperature Range	$T_{op}$	-55 to +125	°C	Without derating. $T_{amb}$
Storage Temperature Range	$T_{stg}$	-55 to +125	°C	
Soldering Temperature	$T_{sol}$	+260	°C	Note 2

**NOTES:**

1. As required; See Para. 1.4.2.
2. Duration 10 seconds maximum.

1.6 PHYSICAL DIMENSIONS

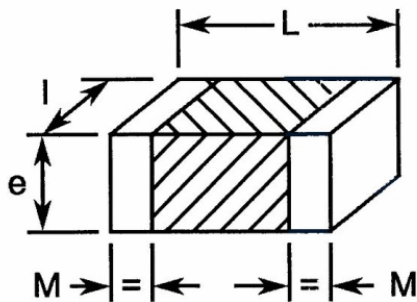

Symbols	Dimensions (mm)			
	Variants 01, 03, 06, 07, 08, 09, 10, 11		Variant 05	
	Min	Max	Min	Max
L	2.8	3.6	2.8	4.1
I	2.2	2.8	2.2	3.3
e	-	2.3	-	2.8
M	0.2	0.75	0.2	0.75

1.7 FUNCTIONAL DIAGRAM





**2 REQUIREMENTS**

**2.1 GENERAL**

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

**2.1.1 Deviations from the Generic Specification**

**2.1.1.1 Deviations from Qualification and Periodic Tests - Chart F4**

(a) Solderability: not applicable to Variants 01, 03, 08, 09, 10 and 11.

**2.2 MARKING**

The marking shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and as follows.

The information to be marked on the component or its primary package shall be:

- (a) The ESCC qualified components symbol (for ESCC qualified components only).
- (b) The ESCC Component Number (see Para. 1.4.1).
- (c) Traceability information.

**2.3 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES**

Electrical measurements shall be performed at room, high and low temperatures.

**2.3.1 Room Temperature Electrical Measurements**

The measurements shall be performed at  $T_{amb} = +22 \pm 3^{\circ}C$ .

Characteristics	Symbols	Test Method and Conditions	Tolerance ( $\pm$ %)	Limits		Units
				Min	Max	
Capacitance (Note 1)	$C_A$	ESCC No. 3009	5 10 20	$0.95C_n$ $0.9C_n$ $0.8C_n$	$1.05C_n$ $1.1C_n$ $1.2C_n$	pF
Tangent of Loss Angle	$tg\delta$	ESCC No. 3009	All	-	$250 \times 10^{-4}$	-
Insulation Resistance	$R_i$	ESCC No. 3009 For $C_n \leq 10000pF$ For $C_n > 10000pF$	All	100 1000	- -	GΩ GΩ.nF
Voltage Proof	VP	ESCC No. 3009	All	$2.5U_R$	-	V

**NOTES:**

1. Capacitance limits may be adjusted to take into account capacitance ageing, as specified in the Generic Specification.

2.3.2 High and Low Temperatures Electrical Measurements

Characteristics	Symbols	Test Method and Conditions (Note 1)	Limits		Units
			Min	Max	
Insulation Resistance	R <sub>i</sub>	ESCC No. <b>3009</b> T <sub>amb</sub> = +125 ±2°C Note 2 For C <sub>n</sub> ≤ 10000pF For C <sub>n</sub> > 10000pF	10	-	GΩ
			100	-	GΩ.nF
Temperature Characteristic	TC	ESCC No. <b>3009</b> T <sub>amb</sub> = -55 ±2°C, +20 ±2°C, +125 ±2°C Note 3 For V <sub>T</sub> = no voltage applied: All Variants: For V <sub>T</sub> = U <sub>R</sub> : Variants 01, 03, 05, 06, 08: Variants 07, 09, 10, 11:	-20	+20	%
			-30	+20	

**NOTES:**

1. The measurements shall be performed on a sample of 5 components from each manufacturing lot with 0 failures allowed. In the event of any failure a 100% inspection may be performed.
2. Guaranteed but not tested during Chart F3 of the Generic Specification; only tested in Temperature Characterisation during Chart F4 of the Generic Specification.
3. In the case of a 100% inspection, a 1% total percent defective is allowed.
4. X7R dielectric. Temperature Characteristic for V<sub>T</sub> = U<sub>R</sub> is typically -60%. Temperature Characteristic measurements with rated voltage applied are not required.

2.4 INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at T<sub>amb</sub> = +22 ±3°C.

Unless otherwise specified the test methods and test conditions shall be as per the corresponding test defined in Para. 2.3.1 Room Temperature Electrical Measurements.

Test Reference per ESCC No. <b>3009</b>	Characteristics	Symbols	Limits		Units
			Min	Max	
Mounting Final Measurements	Capacitance	C <sub>A</sub>	Record Values		-
	Tangent of Loss Angle	tgδ	-	250 x10 <sup>-4</sup>	
	Insulation Resistance	R <sub>i</sub>	Note 1		
Rapid Change of Temperature Initial Measurements	Capacitance	C <sub>A</sub>	Notes 1, 2		
Final Measurements	Capacitance	C <sub>A</sub>	Note 1		
	Change in Capacitance	ΔC <sub>A</sub> /C <sub>A</sub>	-10	+10	%
	Tangent of Loss Angle	tgδ	-	500 x10 <sup>-4</sup>	-

Test Reference per ESCC No. 3009	Characteristics	Symbols	Limits		Units
			Min	Max	
Steady State Humidity (85/85) Initial Measurements  Final Measurements (1000 hours)	Capacitance	$C_A$	Note 1		
	Capacitance	$C_A$	Note 1		
	Change in Capacitance	$\Delta C_A/C_A$	-10	+10	%
	Tangent of Loss Angle	$\text{tg}\delta$	-	$500 \times 10^{-4}$	-
	Insulation Resistance (Note 3): For $C_n \leq 10000\text{pF}$ For $C_n > 10000\text{pF}$	$R_I$ $R_I$	3 30	- -	$\text{G}\Omega$ $\text{G}\Omega.\text{nF}$
Operating Life Initial Measurements  Intermediate Measurements (1000 hours) (Note 4)  Final Measurements (1000 or 2000 hours) (Note 5)	Capacitance	$C_A$	Notes 1, 2		
	Capacitance	$C_A$	Note 1		
	Change in Capacitance	$\Delta C_A/C_A$	-15	+15	%
	Insulation Resistance: For $C_n \leq 10000\text{pF}$ For $C_n > 10000\text{pF}$	$R_I$ $R_I$	10 100	- -	$\text{G}\Omega$ $\text{G}\Omega.\text{nF}$
	Capacitance	$C_A$	Note 1		
	Change in Capacitance	$\Delta C_A/C_A$	-15	+15	%
	Tangent of Loss Angle	$\text{tg}\delta$	-	$500 \times 10^{-4}$	-
	Insulation Resistance: For $C_n \leq 10000\text{pF}$ For $C_n > 10000\text{pF}$	$R_I$ $R_I$	10 100	- -	$\text{G}\Omega$ $\text{G}\Omega.\text{nF}$
	Voltage Proof	VP	$2.5U_R$	-	V
	Temperature Characterisation	Insulation Resistance at $T_{\text{amb}} = +125 \pm 2^\circ\text{C}$	$R_I$	Note 6	
Temperature Characteristic		TC	Note 6		
Robustness of Terminations Final Measurements	Capacitance	$C_A$	Note 1		

**NOTES:**

- As specified in Para. 2.3.1 Room Temperature Electrical Measurements.
- Capacitance values recorded during Mounting may be used as initial measurements.
- Test conditions for Insulation Resistance shall be as specified in Steady State Humidity in the ESCC Generic Specification.
- Intermediate measurements are optional at the Manufacturer's discretion.
- 1000 hours is applicable to Periodic Testing for extension of qualification. 2000 hours is applicable to Qualification Testing, and to Periodic Testing for renewal of qualification after lapse.
- As specified in Para. 2.3.2 High and Low Temperatures Electrical Measurements.

## 2.5 BURN-IN

The requirements for Burn-in are specified in the ESCC Generic Specification. The following conditions shall also apply:

- After Burn-in, the components shall be removed from the chamber and allowed to cool under normal atmospheric conditions for recovery for 24 hours minimum.