



**CAPACITOR FILTERS, C-TYPE, FEEDTHROUGH,  
ELECTROMAGNETIC INTERFERENCE  
SUPPRESSION**

**BASED ON TYPE SFC030**

**ESCC Detail Specification No. 3008/020**

Issue 4	March 2023
---------	------------



### **LEGAL DISCLAIMER AND COPYRIGHT**

European Space Agency, Copyright © 2023. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

**DOCUMENTATION CHANGE NOTICE**

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
1541	Specification upissued to incorporate changes per DCR.

**TABLE OF CONTENTS**

1	GENERAL	5
1.1	SCOPE	5
1.2	APPLICABLE DOCUMENTS	5
1.3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	5
1.4	THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS	5
1.4.1	The ESCC Component Number	5
1.4.2	Component Type Variants and Range of Components	6
1.5	MAXIMUM RATINGS	7
1.6	PHYSICAL DIMENSIONS	8
1.7	FUNCTIONAL DIAGRAM	9
1.8	MATERIALS AND FINISHES	9
1.8.1	Case	9
1.8.2	Lead Material and Finish	9
2	REQUIREMENTS	9
2.1	GENERAL	9
2.1.1	Deviations from the Generic Specification	9
2.2	MARKING	10
2.3	SEAL (FINE AND GROSS LEAK)	10
2.4	SOLDERABILITY	10
2.5	ROBUSTNESS OF TERMINATIONS	10
2.6	ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES	11
2.6.1	Room Temperature Electrical Measurements	11
2.6.2	High and Low Temperatures Electrical Measurements	12
2.7	PARAMETER DRIFT VALUES	12
2.8	INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS	12
2.9	BURN-IN CONDITIONS	14
2.10	OPERATING LIFE CONDITIONS	14
	APPENDIX 'A'	15

**1 GENERAL**

**1.1 SCOPE**

This specification details the ratings, physical and electrical characteristics and test and inspection data for the component type variants and/or the range of components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

**1.2 APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. 3008.
- (b) MIL-STD-202, Test Methods for Electronic and Electrical Component Parts.

**1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS**

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 shall apply.

**1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS**

**1.4.1 The ESCC Component Number**

The ESCC Component Number shall be constituted as follows:

Example: 300802001682MC

- Detail Specification Reference: 3008020
- Component Type Variant Number: 01 (as required)
- Characteristic code: Capacitance Value (6800pF): 682 (as required)
- Characteristic code: Capacitance Tolerance ( $\pm 20\%$ ): M
- Rating code: Rated DC Voltage (50V): C (as required)

**1.4.1.1 Characteristics and Ratings Codes**

Characteristics and ratings to be codified as part of the ESCC Component Number shall be as follows:

- (a) Capacitance Value expressed by means of the following codes in accordance with ESCC Basic Specification No. 21700. The unit quantity shall be picofarad (pF):

Capacitance Value (C) (pF)	Code
XX 10 <sup>1</sup>	XX1
XX 10 <sup>2</sup>	XX2
XX 10 <sup>3</sup>	XX3

- (b) Capacitance Tolerance expressed by the following code in accordance with ESCC Basic Specification No. 21700:

Tolerance ( $\pm \%$ )	Code Letter
20	M

(c) Rated DC Voltage expressed by the following codes:

Rated DC Voltage ( $U_R$ ) (V)	Code Letter
50	C
100	E
200	G

1.4.2 Component Type Variants and Range of Components

The Component Type Variants applicable to this specification are as follows:

Type Variants (Note 1)	Case Description and Terminal Configuration (Note 2)
01 to 03	Steel feedthrough case, non-hermetically sealed at flange end and hermetically sealed at other end
04 to 06	Steel feedthrough case, hermetically sealed at flange end and non-hermetically sealed at other end
07 to 09	Kovar feedthrough case, non-hermetically sealed at flange end and hermetically sealed at other end, with a thermocompression-bondable IN lead (flange end)
10 to 12	Kovar feedthrough case, hermetically sealed at flange end and non-hermetically sealed at other end, with a thermocompression-bondable OUT lead (other end)

**NOTES:**

1. The available range of components and the Insertion Loss requirements for each available capacitance value are as follows:

Type Variant	Rated DC Voltage $U_R$ (V) (at $T_{amb} \leq +85^\circ\text{C}$ )	Range of Capacitance Values C (pF) E6 Series Tolerance $\pm 20\%$	Voltage Proof $V_P$ (V)	Voltage Drop $V_{dr}$ (V)	DC Resistance $R_s$ (m $\Omega$ )	Rated Current $I_R$ (A)	Weight Max. (g)
01	50	470 to 22000	125	0.05	5	5	1
02	100	470 to 6800	250	0.05	5	5	1
03	200	470 to 2200	500	0.05	5	5	1
04	50	470 to 22000	125	0.05	5	5	1
05	100	470 to 6800	250	0.05	5	5	1
06	200	470 to 2200	500	0.05	5	5	1
07	50	470 to 22000	125	0.1	10	1	1
08	100	470 to 6800	250	0.1	10	1	1
09	200	470 to 2200	500	0.1	10	1	1
10	50	470 to 22000	125	0.1	10	1	1
11	100	470 to 6800	250	0.1	10	1	1
12	200	470 to 2200	500	0.1	10	1	1

Capacitance Value C (pF) E6 Series	Insertion Loss $I_L$ (dB)						
	10MHz	50MHz	100MHz	500MHz	1GHz	5GHz	10GHz
470	-	8	14	28	34	48	54
680	-	11	17	31	37	51	57
1000	-	15	21	35	41	55	61
1500	-	18	24	38	44	58	64
2200	-	21	27	41	48	61	68
3300	11	25	31	45	52	60	70
4700	14	28	34	48	54	68	70
6800	17	31	37	51	57	70	70
10000	21	35	41	55	61	70	70
15000	25	39	45	59	65	70	70
22000	28	42	48	54	68	70	70

2. See Para. 1.6 for physical dimensions.

1.5 **MAXIMUM RATINGS**

The maximum ratings shall not be exceeded at any time during use or storage.

Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.



Characteristics	Symbols	Maximum Ratings	Units	Remarks
Rated DC Voltage	$U_R$	See Note 1 of Para. 1.4.2	V	Notes 1, 2
Voltage Drop	$V_{dr}$	See Note 1 of Para. 1.4.2	V	
DC Resistance	$R_s$	See Note 1 of Para. 1.4.2	m $\Omega$	
Rated Current	$I_R$	See Note 1 of Para. 1.4.2	A	DC and Low Frequency
Operating Temperature Range	$T_{op}$	-55 to +125	$^{\circ}C$	$T_{amb}$
Storage Temperature Range	$T_{stg}$	-55 to +125	$^{\circ}C$	
Soldering Temperature Leads Case	$T_{sol}$	+240 +280	$^{\circ}C$	Note 3 Note 4

**NOTES:**

- At  $T_{amb} \leq +85^{\circ}C$ . For  $T_{amb} > +85^{\circ}C$ , the following derating shall apply:
  - For Variants with  $U_R = 50V$  at  $T_{amb} \leq +85^{\circ}C$ , derate linearly to 25V at  $T_{amb} = +125^{\circ}C$ .
  - For Variants with  $U_R = 100V$  at  $T_{amb} \leq +85^{\circ}C$ , derate linearly to 75V at  $T_{amb} = +125^{\circ}C$ .
  - For Variants with  $U_R = 200V$  at  $T_{amb} \leq +85^{\circ}C$ , derate linearly to 150V at  $T_{amb} = +125^{\circ}C$ .

2. The DC applied voltage plus the ripple voltage shall never exceed the maximum rated DC voltage.
3. Duration 10 seconds maximum at a distance of not less than 2mm from the body and the same lead shall not be resoldered until 3 minutes have elapsed.
4. Duration 6 seconds maximum.

1.6 PHYSICAL DIMENSIONS

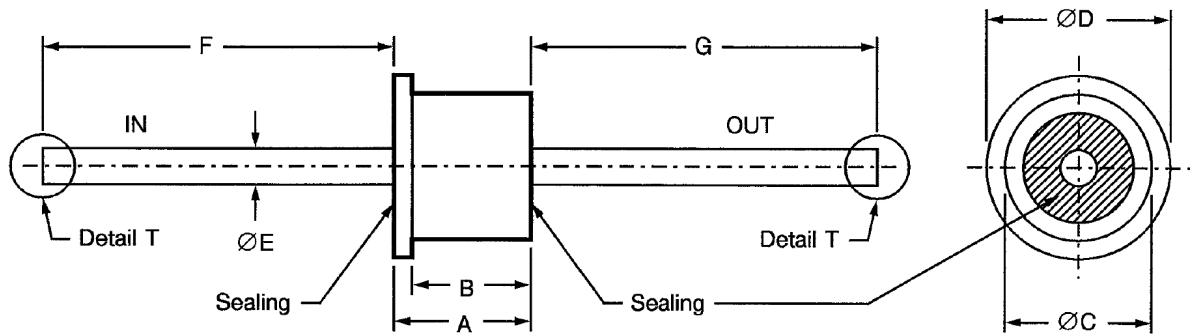


Symbols	Dimensions (mm)					
	Variants 01 to 06		Variants 07 to 09		Variants 10 to 12	
	Min	Max	Min	Max	Min	Max
A	2.7	2.9	2.7	2.9	2.7	2.9
B	2.2	2.4	2.2	2.4	2.2	2.4
ØC	3.1	3.3	3.1	3.3	3.1	3.3
ØD	3.9	4.1	3.9	4.1	3.9	4.1
ØE (Notes 1, 2)	0.75	0.88	0.75	0.88	0.75	0.88
F	6	7	1	2	6	7
G	6	7	6	7	1	2
ØU (Note 3)	N/A	N/A	0.4	-	0.4	-

**NOTES:**

1. Lead finish shall commence not more than 1.5mm from encapsulant.
2. Applies to both leads.
3. This dimension applies to Variants 07 to 12, where Detail T defines the specific area for thermocompression bonding at the end of the lead. See Para. 1.4.2 for details of the terminals concerned.



## 1.7 FUNCTIONAL DIAGRAM

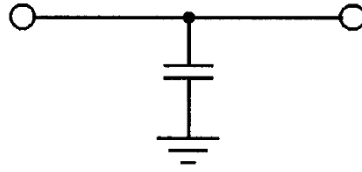

## 1.8 MATERIALS AND FINISHES

### 1.8.1 Case

The case shall be either gold plated steel or kovar, hermetically sealed with a hard glass seal at one end and potting encapsulant sealing the filter element at the other end. See Para. 1.4.2.

### 1.8.2 Lead Material and Finish

#### 1.8.2.1 *Variants 01 to 06*

The lead material shall be Type H with Type 7 finish in accordance with the requirements of ESCC Basic Specification No. [23500](#).

#### 1.8.2.2 *Variants 07 to 12*

The lead material shall be Type D with Type 7 finish in accordance with the requirements of ESCC Basic Specification No. [23500](#).

## 2 REQUIREMENTS

### 2.1 GENERAL

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

#### 2.1.1 Deviations from the Generic Specification

##### 2.1.1.1 *Deviations from Screening Tests - Chart F3*

- (a) Rapid Change of Temperature: The components need not be mounted.
- (b) Vibration: Shall not be performed.
- (c) Seal (Fine and Gross Leak): Shall only be performed on the hermetically sealed side of the component.

### 2.1.1.2 *Deviations from Qualification and Periodic Tests – Charts F4A and F4B*

- (a) Seal (Fine and Gross Leak): Shall only be performed on the hermetically sealed side of the component.
- (b) Damp Heat: Shall only be performed on the non-hermetically sealed side of the component.
- (c) Resistance to Soldering Heat: May be performed prior to Vibration.
- (d) Immersion: Shall only be performed on the hermetically sealed side of the component.
- (e) Operating Life, Intermediate and Final Measurements: Insertion Loss measurements shall not be performed.

## 2.2 MARKING

The marking shall be in accordance with the requirements of ESCC Basic Specification No. [21700](#) and as follows.

The information to be marked on the component or its primary package shall be:

- (a) The ESCC qualified components symbol (for ESCC qualified components only).
- (b) The ESCC Component Number (see Para. 1.4.1).
- (c) Traceability information.

## 2.3 SEAL (FINE AND GROSS LEAK)

The test conditions for Fine and Gross Leak shall be as specified in the ESCC Generic Specification.

The limit for Fine Leak shall be  $5 \times 10^{-3}$  Pa.cm<sup>3</sup>/s

## 2.4 SOLDERABILITY

The test conditions for Solderability shall be as specified in the ESCC Generic Specification and as follows:

- Test Method 1. Terminals shall be immersed up to 2mm from sealing.
- A 1.6mm thermal screen may be used.

## 2.5 ROBUSTNESS OF TERMINATIONS

The leads of the components are rigid.

The test conditions for Robustness of Terminations shall be as specified in the ESCC Generic Specification and as follows:

- Test Ua<sub>1</sub>, tensile, with an applied force of 10N and a duration of 10 ±1 seconds.

2.6 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES

The measurements shall be performed at room, high and low temperatures.

2.6.1 Room Temperature Electrical Measurements

The measurements shall be performed at  $T_{amb} = +22 \pm 3^{\circ}\text{C}$ .

Characteristics	Symbols	Test Method and Conditions	Limits		Units
			Min	Max	
Voltage Drop	$V_{dr}$	ESCC No. 3008	-	Note 1	V
Voltage Proof	$V_P$	ESCC No. 3008 $2.5 \times U_R$	Note 1	-	V
Insulation Resistance	$R_i$	ESCC No. 3008	$10^4$	-	MΩ
Insertion Loss	$I_{L1}$	f = 10MHz (Notes 2, 3)	Note 1	-	dB
	$I_{L2}$	f = 50MHz (Notes 2, 4)	Note 1	-	dB
	$I_{L3}$	f = 100MHz (Notes 2, 3)	Note 1	-	dB
	$I_{L4}$	f = 500MHz (Notes 2, 4)	Note 1	-	dB
	$I_{L5}$	f = 1GHz (Notes 2, 3)	Note 1	-	dB
	$I_{L6}$	f = 5GHz (Notes 2, 4)	Note 1	-	dB
	$I_{L7}$	f = 10GHz (Notes 2, 4)	Note 1	-	dB
Capacitance	C	ESCC No. 3008	Note 1		pF

**NOTES:**

1. See Note 1 of Para. 1.4.2.
2. For Qualification Testing and Periodic Testing for renewal of qualification after lapse, measurements shall be made with a load current of zero and, during either Subgroup 1B or Subgroup 1C of Chart F4A in the Generic Specification, measurements shall also be made at the rated current specified in Note 1 of Para. 1.4.2.
3. For Screening and Periodic Testing for extension of qualification,  $I_{L1}$ ,  $I_{L3}$  and  $I_{L5}$  shall be measured with no load current applied.
4. For Screening and Periodic Testing for extension of qualification,  $I_{L2}$ ,  $I_{L4}$ ,  $I_{L6}$  and  $I_{L7}$  are guaranteed but not tested.

2.6.2 High and Low Temperatures Electrical Measurements

Characteristics	Symbols	Test Method and Conditions (Note 1)	Limits		Units
			Min	Max	
Insulation Resistance	R <sub>i</sub>	ESCC No. 3008 T <sub>amb</sub> = +125 (+0 -5)°C	10 <sup>3</sup>	-	MΩ
Change in Capacitance	ΔC/C	ESCC No. 3008 T <sub>amb</sub> = +125 (+0 -5)°C and T <sub>amb</sub> = -55 (+5 -0)°C	-20	+20	% (Note 2)

**NOTES:**

1. Measurements shall be performed on a sample of 5 components. In the event of any failure a 100% inspection shall be performed.
2. With respect to the room temperature measurement. See Para. 2.6.1.

2.7 PARAMETER DRIFT VALUES

The measurements shall be performed at T<sub>amb</sub> = +22 ±3°C.

The test methods and test conditions shall be as per the corresponding test defined in Para. 2.6.1, Room Temperature Electrical Measurements.

The drift values (Δ) shall not be exceeded for each characteristic where specified. The corresponding absolute limit values for each characteristic shall not be exceeded.

Characteristics	Symbols	Drift Value Δ	Units
Change in Capacitance	ΔC/C	±10	%

2.8 INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at T<sub>amb</sub> = +22 ±3°C.

Unless otherwise specified, test methods and test conditions shall be as per the corresponding test defined in Para. 2.6.1, Room Temperature Electrical Measurements.

The drift values (Δ) shall not be exceeded for each characteristic where specified. The corresponding absolute limit values for each characteristic shall not be exceeded.

Test Reference per ESCC No. 3008	Characteristics	Symbols	Limits		Units
			Min	Max	
Overload	Insulation Resistance	R <sub>i</sub>	Note 1	-	MΩ
	Voltage Drop	V <sub>dr</sub>	-	Note 2	V
Low Air Pressure	Voltage Proof	V <sub>P</sub>	125% U <sub>R</sub>	-	V
Damp Heat	Insulation Resistance	R <sub>i</sub>	Note 3	-	MΩ
Resistance to Soldering Heat	Insulation Resistance	R <sub>i</sub>	Note 1	-	MΩ
	Insertion Loss	I <sub>L</sub>	Note 2	-	dB
Shock	Insertion Loss	I <sub>L</sub>	Note 2	-	dB

Test Reference per ESCC No. 3008	Characteristics	Symbols	Limits		Units
			Min	Max	
Vibration	Insertion Loss	I <sub>L</sub>	Note 2	-	dB
Immersion	Voltage Proof	V <sub>P</sub>	90% U <sub>R</sub>	-	V
	Insulation Resistance	R <sub>i</sub>	Note 1	-	MΩ
	Insertion Loss	I <sub>L</sub>	Note 2	-	dB
Accelerated Damp Heat	Voltage Proof	V <sub>P</sub>	90% U <sub>R</sub>	-	V
	Insulation Resistance	R <sub>i</sub>	Note 1	-	MΩ
	Insertion Loss	I <sub>L</sub>	Note 2	-	dB
Operating Life					
Initial Measurements	Capacitance	C	Note 2		pF
Intermediate Measurements (at 500 hours (Note 6)) / (at 1000 hours (Note 7))	Insulation Resistance at +125 (+0 -3)°C	R <sub>i</sub>	Note 4	-	MΩ
	After recovery:				
	Capacitance	C	Note 2		pF
	Change in Capacitance	ΔC/C	-	±10	%
	Voltage Proof	V <sub>P</sub>	90% U <sub>R</sub>	-	V
	Insulation Resistance	R <sub>i</sub>	Note 5	-	MΩ
Final Measurements (at 1000 or 2000 hours (Note 8))	Insulation Resistance at +125 (+0 -3)°C	R <sub>i</sub>	Note 4	-	MΩ
	After recovery:				
	Capacitance	C	Note 2		pF
	Change in Capacitance	ΔC/C	-	±10	%
	Voltage Proof	V <sub>P</sub>	90% U <sub>R</sub>	-	V
	Insulation Resistance	R <sub>i</sub>	Note 5	-	MΩ
Robustness of Terminations	Voltage Drop	V <sub>dr</sub>	-	Note 2	V

**NOTES:**

1. See Para. 2.6.1.
2. See Note 1 of Para. 1.4.2.
3. > 10% of the value given in Para. 2.6.1.
4. See Para. 2.6.2.
5. > 50% of the value given in Para. 2.6.1.
6. 500 hours is applicable to Qualification Testing, Periodic Testing for extension of qualification and to Periodic Testing for renewal of qualification after lapse.
7. 1000 hours is applicable to Qualification Testing, and to Periodic Testing for renewal of qualification after lapse.
8. 1000 hours is applicable to Periodic Testing for extension of qualification. 2000 hours is applicable to Qualification Testing, and to Periodic Testing for renewal of qualification after lapse.

2.9 BURN-IN CONDITIONS

Characteristics	Symbols	Test Conditions	Units
Ambient Temperature	$T_{amb}$	+125 (+0 -3)	°C
Applied Voltage	$U_A$		V
Variants 03, 06, 09, 12		300	
Variants 02, 05, 08, 11		150	
Variants 01, 04, 07, 10		50	
		(Note 1)	

**NOTES:**

1. Between one terminal and the case.

2.10 OPERATING LIFE CONDITIONS

Characteristics	Symbols	Test Conditions	Units
Ambient Temperature	$T_{amb}$	+125 (+0 -3)	°C
Applied Voltage	$U_A$		V
Variants 03, 06, 09, 12		300	
Variants 02, 05, 08, 11		150	
Variants 01, 04, 07, 10		50	
		(Note 1)	
Rated Current	$I_R$	Note 2	A

**NOTES:**

1. Between one terminal and the case.
2. Current flow between the terminals. For the applicable Rated Current, see Note 1 of Para. 1.4.2.

**APPENDIX 'A'**  
**AGREED DEVIATIONS FOR EXXELIA TECHNOLOGIES (F)**

Item Affected	Description of Deviations
Para. 2.1.1.1, Deviations from Screening Tests – Chart F3	<p>Room Temperature Electrical Measurements: The Voltage Drop measurements may be replaced by DC Resistance measurements in accordance with <a href="#">MIL-STD-202, Test Method 303</a>. The applicable DC Resistance value specified in Note 1 of Para. 1.4.2 shall not be exceeded.</p> <p>Seal (Fine and Gross Leak): Shall not be performed.</p>
Para. 2.1.1.2, Deviations from Qualification and Periodic Tests – Chart F4A and F4B	<p>Overload and Robustness of Terminations (Intermediate and End-Point Electrical Measurements): The Voltage Drop measurements may be replaced by DC Resistance measurements in accordance with <a href="#">MIL-STD-202, Test Method 303</a>. The applicable DC Resistance value specified in Note 1 of Para. 1.4.2 shall not be exceeded.</p> <p>Seal (Fine and Gross Leak): Shall not be performed.</p> <p>Immersion: Shall not be performed.</p>