



**CAPACITOR FILTERS, PI-TYPE, FEEDTHROUGH,
ELECTROMAGNETIC INTERFERENCE
SUPPRESSION**

BASED ON TYPE SFP035

ESCC Detail Specification No. 3008/025

Issue 6	September 2024
---------	----------------



LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2024. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
1675	Specification upissued to incorporate changes per DCR.

TABLE OF CONTENTS

1	GENERAL	5
1.1	SCOPE	5
1.2	APPLICABLE DOCUMENTS	5
1.3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	5
1.4	THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS	5
1.4.1	The ESCC Component Number	5
1.4.2	Component Type Variants	5
1.5	MAXIMUM RATINGS	7
1.6	PHYSICAL DIMENSIONS	8
1.7	FUNCTIONAL DIAGRAM	9
1.8	MATERIALS AND FINISHES	9
1.8.1	Case	9
1.8.2	Lead Material and Finish	9
1.8.3	Accessories	9
2	REQUIREMENTS	9
2.1	GENERAL	9
2.1.1	Deviations from the Generic Specification	9
2.1.1.1	Deviations from Screening Tests - Chart F3	9
2.2	MARKING	9
2.3	SOLDERABILITY	10
2.4	ROBUSTNESS OF TERMINATIONS	10
2.5	ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES	10
2.5.1	Room Temperature Electrical Measurements	10
2.5.2	High and Low Temperatures Electrical Measurements	11
2.6	PARAMETER DRIFT VALUES	11
2.7	INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS	11
2.8	BURN-IN CONDITIONS	13
2.9	OPERATING LIFE CONDITIONS	13
	APPENDIX 'A'	14

1 GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics and test and inspection data for the component type variants and/or the range of components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

1.2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. [3008](#).
- (b) [MIL-STD-202](#), Test Methods for Electronic and Electrical Component Parts.

1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. [21300](#) shall apply.

1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS

1.4.1 The ESCC Component Number

The ESCC Component Number shall be constituted as follows:

Example: 300802501

- Detail Specification Reference: 3008025
- Component Type Variant Number: 01 (as required)

1.4.2 Component Type Variants

The Component Type Variants applicable to this specification are as follows:

Type Variants (Note 1)	Case Description and Terminal Configuration (Note 2)	Weight Max. (g)
01 to 05	Non-hermetically sealed feedthrough case with M3.5×0.35 thread and straight terminals	2
06 to 10	Non-hermetically sealed feedthrough case with M3.5×0.35 thread, button body-end terminal and straight thread-end terminal	
11 to 15	Non-hermetically sealed feedthrough case with #6-40 UNF thread and straight terminals	
16 to 20	Non-hermetically sealed feedthrough case with #6-40 UNF thread, button body-end terminal and straight thread-end terminal	

NOTES:

1. Characteristics applicable to each set of Component Type Variants are as follows:

Type Variants	Rated DC Voltage U_R (V) (at $T_{amb} \leq +85^\circ C$)	Insulation Resistance R_i (GΩ)		Voltage Proof V_P (V)	Capacitance C (pF)
		-55 / +85°C	+125°C		
01, 06, 11, 16	200	10	1	500	2400
02, 07, 12, 17	200	10	1	500	4800
03, 08, 13, 18	50	5	0.5	125	35200
04, 09, 14, 19	100	10	1	250	10880
05, 10, 15, 20	200	10	1	500	3520

Type Variants	Insertion Loss I_L (dB) With No Load / Rated Current Applied				
	1MHz	10MHz	100MHz	1GHz	10GHz
01, 06, 11, 16	-	5 / 5	30 / 20	55 / 50	70 / 70
02, 07, 12, 17	-	8 / 8	50 / 25	65 / 65	65 / 65
03, 08, 13, 18	10 / 10	38 / 30	65 / 65	70 / 70	70 / 70
04, 09, 14, 19	-	20 / 20	70 / 50	70 / 70	70 / 70
05, 10, 15, 20	-	8 / 8	50 / 30	70 / 70	70 / 70

2. See Para. 1.6 for physical dimensions.

1.5 MAXIMUM RATINGS

The maximum ratings shall not be exceeded at any time during use or storage.


Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.

Characteristics	Symbols	Maximum Ratings	Units	Remarks
Rated DC Voltage	U_R	See Note 1 of Para. 1.4.2	V	Notes 1, 2
Voltage Drop	V_{dr}	0.1	V	DC
DC Resistance	R_s	10	m Ω	
Rated Current	I_R	10	A	DC and Low Frequency
Torque Variants 01 to 10 Variants 11 to 20	T_{qe}	0.3 0.2	Nm	
Operating Temperature Range	T_{op}	-55 to +125	$^{\circ}C$	T_{amb}
Storage Temperature Range	T_{stg}	-55 to +125	$^{\circ}C$	
Soldering Temperature	T_{sol}	+260	$^{\circ}C$	Note 3

NOTES:

1. At $T_{amb} \leq +85^{\circ}C$. For $T_{amb} > +85^{\circ}C$, the following derating shall apply:
 - For Variants with $U_R = 200V$ at $T_{amb} \leq +85^{\circ}C$, derate linearly to 100V at $T_{amb} = +125^{\circ}C$.
 - For Variants with $U_R = 100V$ at $T_{amb} \leq +85^{\circ}C$, derate linearly to 70V at $T_{amb} = +125^{\circ}C$.
 - For Variants with $U_R = 50V$ at $T_{amb} \leq +85^{\circ}C$, derate linearly to 25V at $T_{amb} = +125^{\circ}C$.
2. The addition of DC applied voltage and ripple voltage shall never exceed the rated DC voltage.
3. Duration 10 seconds maximum at a distance of not less than 2mm from the body and the same lead shall not be resoldered until 3 minutes have elapsed.

1.6 PHYSICAL DIMENSIONS

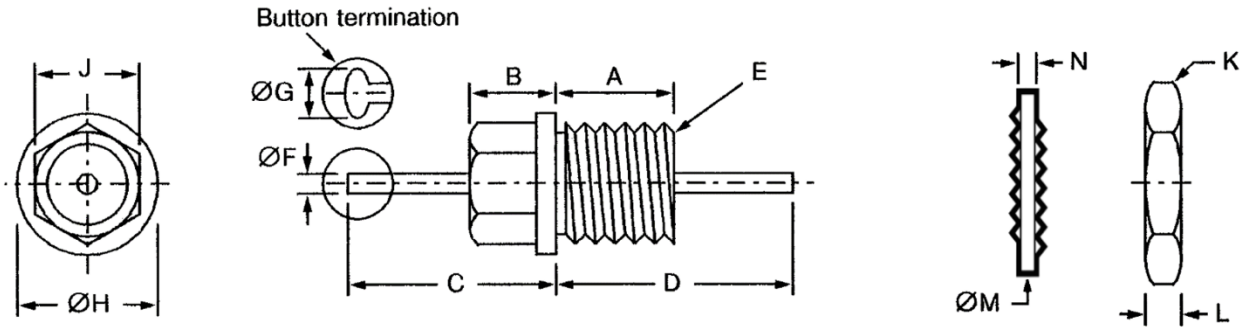


Symbols	Dimensions (mm)		Remarks
	Min	Max	
A	4.9	5.1	
B	2.9	3.1	
C	6	8	
D	14	17	
E	M3.5×0.35 #6-40 UNF		Thread, Variants 01 to 10 Thread, Variants 11 to 20
ØF (Notes 1, 2)	0.72	0.88	
ØG	N/A 1	N/A 1.2	Variants 01 to 05 and 11 to 15 Variants 06 to 10 and 16 to 20
ØH	3.9	4.1	
J	-	3	
K	- -	6 5	Across flats, Variants 01 to 10 Across flats, Variants 11 to 20
L	-	2	
ØM (Note 3)	-	6.6	
N (Note 3)	-	0.4	

NOTES:

1. Lead finish shall commence not more than 1.5mm from encapsulant.
2. Applies to both leads.
3. Internal fan lock-washer.

1.7 FUNCTIONAL DIAGRAM

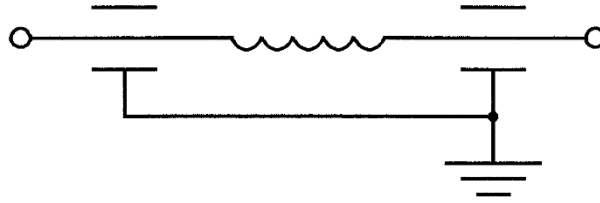

1.8 MATERIALS AND FINISHES

1.8.1 Case

The case shall be silver plated bronze-beryllium with potting encapsulant sealing the filter element.

1.8.2 Lead Material and Finish

The lead material shall be Type A with Type 10 finish in accordance with the requirements of ESCC Basic Specification No. [23500](#).

1.8.3 Accessories

The materials and finishes of the accessories shown in Para. 1.6 shall be as follows:

- Nut: silver plated brass.
- Lock-washer: silver plated bronze.

2 REQUIREMENTS

2.1 GENERAL

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

2.1.1 Deviations from the Generic Specification

2.1.1.1 *Deviations from Screening Tests - Chart F3*

- (a) Vibration: Shall not be performed.
- (b) External Visual Inspection: Any discolouration of the silver plating of the case is acceptable.

2.2 MARKING

The marking shall be in accordance with the requirements of ESCC Basic Specification No. [21700](#) and as follows.

The information to be marked on the component or its primary package shall be:

- (a) The ESCC qualified components symbol (for ESCC qualified components only).
- (b) The ESCC Component Number (see Para. 1.4.1).
- (c) Traceability information.

2.3 SOLDERABILITY

The test conditions for Solderability shall be as specified in the ESCC Generic Specification and as follows:

- Test Method 1. Terminals shall be immersed up to 2mm from the body.
- A 1.6mm thermal screen may be used.

2.4 ROBUSTNESS OF TERMINATIONS

The leads of the components are rigid.

The test conditions for Robustness of Terminations shall be as specified in the ESCC Generic Specification and as follows:

- Test U_{a1} , tensile, with an applied force of 10N and a duration of 10 ± 1 seconds.

2.5 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES

The measurements shall be performed at room, high and low temperatures.

2.5.1 Room Temperature Electrical Measurements

The measurements shall be performed at $T_{amb} = +22 \pm 3^{\circ}C$.

Characteristics	Symbols	Test Method and Conditions	Limits		Units
			Min	Max	
Voltage Drop	V_{dr}	ESCC No. 3008	-	0.1	V
Voltage Proof	V_P	ESCC No. 3008 $2.5 \times U_R$	Note 1	-	V
Insulation Resistance	R_i	ESCC No. 3008	Note 1	-	$G\Omega$
Insertion Loss	I_{L1}	f = 1MHz (Notes 2, 3)	Note 1	-	dB
	I_{L2}	f = 10MHz (Notes 2, 4)	Note 1	-	dB
	I_{L3}	f = 100MHz (Notes 2, 4)	Note 1	-	dB
	I_{L4}	f = 1GHz (Notes 2, 4)	Note 1	-	dB
	I_{L5}	f = 10GHz (Notes 2, 3)	Note 1	-	dB
Capacitance	C	ESCC No. 3008	Note 1	-	pF

NOTES:

1. See Note 1 of Para. 1.4.2.
2. For Qualification Testing and Periodic Testing for renewal of qualification after lapse, measurements shall be made with a load current of zero and, during either Subgroup 1B or Subgroup 1C of Chart F4B in the Generic Specification, measurements shall also be made at the rated current specified in Para. 1.5.
3. For Screening and Periodic Testing for extension of qualification, I_{L1} and I_{L5} are guaranteed but not tested.
4. For Screening and Periodic Testing for extension of qualification, I_{L2} , I_{L3} and I_{L4} shall be measured with no load current applied.

2.5.2 High and Low Temperatures Electrical Measurements

Characteristics	Symbols	Test Method and Conditions (Note 1)	Limits		Units
			Min	Max	
Insulation Resistance	R _i	ESCC No. 3008 T _{amb} = +125 (+0 -3)°C	Note 2	-	GΩ
Insertion Loss		ESCC No. 3008 T _{amb} = +125 (+0 -3)°C and T _{amb} = -55 (+3 -0)°C			
	I _{L2}	f = 10MHz (Note 3)	Note 2	-	dB
	I _{L3}	f = 100MHz (Note 3)	Note 2	-	dB
	I _{L4}	f = 1GHz (Note 3)	Note 2	-	dB

NOTES:

1. Measurements shall be performed on a sample of 5 components. In the event of any failure a 100% inspection shall be performed.
2. See Note 1 of Para. 1.4.2.
3. Measurements shall be made with no load current applied.

2.6 PARAMETER DRIFT VALUES

The measurements shall be performed at T_{amb} = +22 ±3°C.

The test methods and test conditions shall be as per the corresponding test defined in Para. 2.5.1, Room Temperature Electrical Measurements.

The drift values (Δ) shall not be exceeded for each characteristic where specified. The corresponding absolute limit values for each characteristic shall not be exceeded.

Characteristics	Symbols	Drift Value Δ	Units
Change in Capacitance	ΔC/C	±10	%

2.7 INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at T_{amb} = +22 ±3°C.

Unless otherwise specified, test methods and test conditions shall be as per the corresponding test defined in Para. 2.5.1, Room Temperature Electrical Measurements.

The drift values (Δ) shall not be exceeded for each characteristic where specified. The corresponding absolute limit values for each characteristic shall not be exceeded.

Test Reference per ESCC No. 3008	Characteristics	Symbols	Limits		Units
			Min	Max	
Overload	Voltage Drop	V _{dr}	-	Note 1	V
	Insulation Resistance	R _i	Note 2	-	GΩ
Low Air Pressure	Voltage Proof	V _P	125% U _R	-	V

Test Reference per ESCC No. 3008	Characteristics	Symbols	Limits		Units	
			Min	Max		
Damp Heat	Insulation Resistance	R _i	Note 3	-	GΩ	
Resistance to Soldering Heat	Insulation Resistance	R _i	Note 2	-	GΩ	
	Insertion Loss	I _L	Note 2	-	dB	
Shock	Insertion Loss	I _L	Note 2	-	dB	
Vibration	Insertion Loss	I _L	Note 2	-	dB	
Accelerated Damp Heat	Voltage Proof	V _P	90% U _R	-	V	
	Insulation Resistance	R _i	Note 4	-	GΩ	
	Insertion Loss	I _L	Note 2	-	dB	
Operating Life	Initial Measurements	Capacitance	C	Note 2	-	pF
	Intermediate Measurements (at 500 hours (Note 5)) / (at 1000 hours (Note 6))	Insulation Resistance at +125 (+0 -3)°C After recovery	R _i	Note 2	-	GΩ
		Capacitance	C	Note 2	-	pF
	Change in Capacitance	ΔC/C	-	±10	%	
	Voltage Proof	V _P	90% U _R	-	V	
	Insulation Resistance	R _i	Note 4	-	GΩ	
	Insertion Loss	I _L	Note 2	-	dB	
	Final Measurements (at 1000 or 2000 hours (Note 7))	Insulation Resistance at +125 (+0 -3)°C After recovery	R _i	Note 2	-	GΩ
		Capacitance	C	Note 2	-	pF
		Change in Capacitance	ΔC/C	-	±10	%
		Voltage Proof	V _P	90% U _R	-	V
		Insulation Resistance	R _i	Note 4	-	GΩ
		Insertion Loss	I _L	Note 2	-	dB
	Robustness of Terminations	Voltage Drop	V _{dr}	-	Note 1	V

NOTES:

1. See Para. 2.5.1.
2. See Note 1 of Para. 1.4.2.
3. > 10% of the value given in Note 1 of Para. 1.4.2.
4. > 50% of the value given in Note 1 of Para. 1.4.2.
5. 500 hours is applicable to Qualification Testing, Periodic Testing for extension of qualification and to Periodic Testing for renewal of qualification after lapse.
6. 1000 hours is applicable to Qualification Testing, and to Periodic Testing for renewal of qualification after lapse.
7. 1000 hours is applicable to Periodic Testing for extension of qualification. 2000 hours is applicable to Qualification Testing, and to Periodic Testing for renewal of qualification after lapse.

2.8 **BURN-IN CONDITIONS**

Characteristics	Symbols	Test Conditions	Units
Ambient Temperature	T_{amb}	+125 (+0 -3)	°C
Applied Voltage	U_A		V
Variants 01, 02, 05, 06, 07, 10, 11, 12, 15, 16, 17, 20		200	
Variants 04, 09, 14, 19		140	
Variants 03, 08, 13, 18		70	
		(Note 1)	

NOTES:

1. Between one terminal and the case.

2.9 **OPERATING LIFE CONDITIONS**

Characteristics	Symbols	Test Conditions	Units
Ambient Temperature	T_{amb}	+125 (+0 -3)	°C
Applied Voltage	U_A		V
Variants 01, 02, 05, 06, 07, 10, 11, 12, 15, 16, 17, 20		200	
Variants 04, 09, 14, 19		140	
Variants 03, 08, 13, 18		70	
		(Note 1)	
Rated Current	I_R	10 (Note 2)	A

NOTES:

1. Between one terminal and the case.
2. To flow between the terminals.

APPENDIX 'A'
AGREED DEVIATIONS FOR EXXELIA TECHNOLOGIES (F)

Item Affected	Description of Deviations
Para. 2.1.1.1, Deviations from Screening Tests – Chart F3	Room Temperature Electrical Measurements: <ul style="list-style-type: none">• The Voltage Drop measurements may be replaced by DC Resistance measurements in accordance with MIL-STD-202, Test Method 303, with a limit of 10mΩ maximum.• Insertion Loss may be performed on a sample of 5 components. In the event of any failure a 100% inspection shall be performed.
Para. 2.1.1, Deviations from the Generic Specification: Deviations from Qualification and Periodic Tests – Chart F4B	Overload and Robustness of Terminations (Intermediate and End-Point Electrical Measurements): The Voltage Drop measurements may be replaced by DC Resistance measurements in accordance with MIL-STD-202, Test Method 303 , with a limit of 10mΩ maximum.