



Pages 1 to 20

**ATTENUATOR,
RF, COAXIAL, TYPE SMA, DC - 22GHz**

ESCC Detail Specification No. 3403/005

| | |
|---------|-----------|
| Issue 3 | June 2007 |
|---------|-----------|



Document Custodian: European Space Agency - see <https://escies.org>

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2007. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

| DCR No. | CHANGE DESCRIPTION |
|----------|---|
| 279, 310 | Specification upissued to incorporate editorial and technical changes per DCR |

TABLE OF CONTENTS

| | | |
|-----------|---|-----------|
| 1. | <u>GENERAL</u> | 5 |
| 1.1 | Scope | 5 |
| 1.2 | Applicable Documents | 5 |
| 1.3 | Terms, Definitions, Abbreviations, Symbols and Units | 5 |
| 1.4 | The ESCC Component Number and Component Type Variants | 5 |
| 1.4.1 | The ESCC Component Number | 5 |
| 1.4.2 | Component Type Variants and Range of Components | 5 |
| 1.5 | Maximum Ratings | 7 |
| 1.6 | Physical Dimensions | 8 |
| 1.6.1 | Interface Dimensions | 9 |
| 1.6.2 | Mating Gauge Dimensions | 12 |
| 1.7 | Materials and Finishes | 15 |
| 2. | <u>REQUIREMENTS</u> | 15 |
| 2.1 | General | 15 |
| 2.1.1 | Deviations from the Generic Specification | 15 |
| 2.1.1.1 | Deviations from Qualification and Periodic Tests - Chart F4 | 15 |
| 2.2 | Marking | 15 |
| 2.3 | Contact Engagement and Separation Forces Test | 15 |
| 2.4 | Coupling Proof Torque Test | 16 |
| 2.5 | Mating and Unmating Forces Test | 16 |
| 2.6 | Electrical Measurements at Room, High and Low temperatures | 16 |
| 2.6.1 | Room Temperature Electrical Measurements | 16 |
| 2.6.2 | High and Low Temperatures Electrical Measurements | 17 |
| 2.7 | Parameter Drift Values | 17 |
| 2.8 | Intermediate and End-Point Electrical Measurements | 18 |
| 2.9 | Burn-in Conditions | 20 |
| 2.10 | Operating Life Conditions | 20 |

1. GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics and test and inspection data for the component type variants and/or the range of components specified below. It supplements the requirements of, and shall be read in conjunction with, the ESCC Generic Specification listed under Applicable Documents.

1.2 APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. 3403.

1.3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 shall apply.

1.4 THE ESCC COMPONENT NUMBER AND COMPONENT TYPE VARIANTS

1.4.1 The ESCC Component Number

The ESCC Component Number shall be constituted as follows:

Example: 340300501

- Detail Specification Reference: 3403005
- Component Type Variant Number: 01 (as required)

1.4.2 Component Type Variants and Range of Components

The component type variants and range of components applicable to this specification are as follows:

1.5 MAXIMUM RATINGS

The maximum ratings shall not be exceeded at any time during use or storage.


Maximum ratings shall only be exceeded during testing to the extent specified in this specification and when stipulated in Test Methods and Procedures of the ESCC Generic Specification.

| Characteristics | Symbols | Maximum Ratings | Units | Remarks |
|-----------------------------|-----------|-----------------|-------------|-------------------------------------|
| RF Power | P_{RF} | Note 1 | W | Note 2 |
| Peak Power | P_P | Note 1 | W | duration 1 μ s 1% duty cycle |
| DC Power | P_{DC} | Note 1 | W | $T_{amb}=+25^{\circ}C$ |
| Impedance | Z | 47.5 to 52.5 | Ω | - |
| Frequency Range | f_{op} | DC to 22 | GHz | - |
| RF Leakage | E | -85 | dBi | - |
| Operating Temperature Range | T_{op} | -55 to +125 | $^{\circ}C$ | T_{amb} |
| Storage Temperature Range | T_{stg} | -55 to +125 | $^{\circ}C$ | - |
| Coupling Nut Torque | Tq | 120 | N.cm | Note 3 |

NOTES:

- The maximum rating for RF Power is specified in Component Type Variants and Range of Components. The maximum rated DC Power shall be the same value. The maximum rated Peak Power shall be $100 \times P_{RF}$
- RF Power shall be derated against operating temperature as follows:
 P_{RF} at $T_{op} \leq +25^{\circ}C$. Derate linearly to 500mW at $T_{op} = +125^{\circ}C$.
- Coupling Proof Torque: 170N.cm. During engagement of the component with its mating counterpart the body of the component shall be restrained by means of the body flats whilst torque is applied to the coupling nuts. (See Para. 1.6)

1.6 PHYSICAL DIMENSIONS

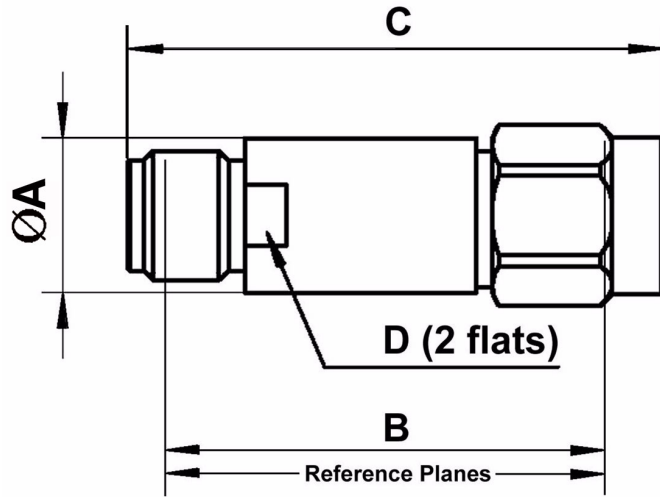


| Symbols | Dimensions mm | | Notes |
|---------|---------------|------|-------|
| | Min | Max | |
| ØA | - | 7.7 | - |
| B | 16.7 | 17.1 | - |
| C | 20.9 | - | - |
| D | 6.9 | 7 | 1 |

NOTES:

1. The body flats shall be used to restrain the body during engagement whilst torque is applied to the coupling nuts.


1.6.1 Interface Dimensions

Female Interface

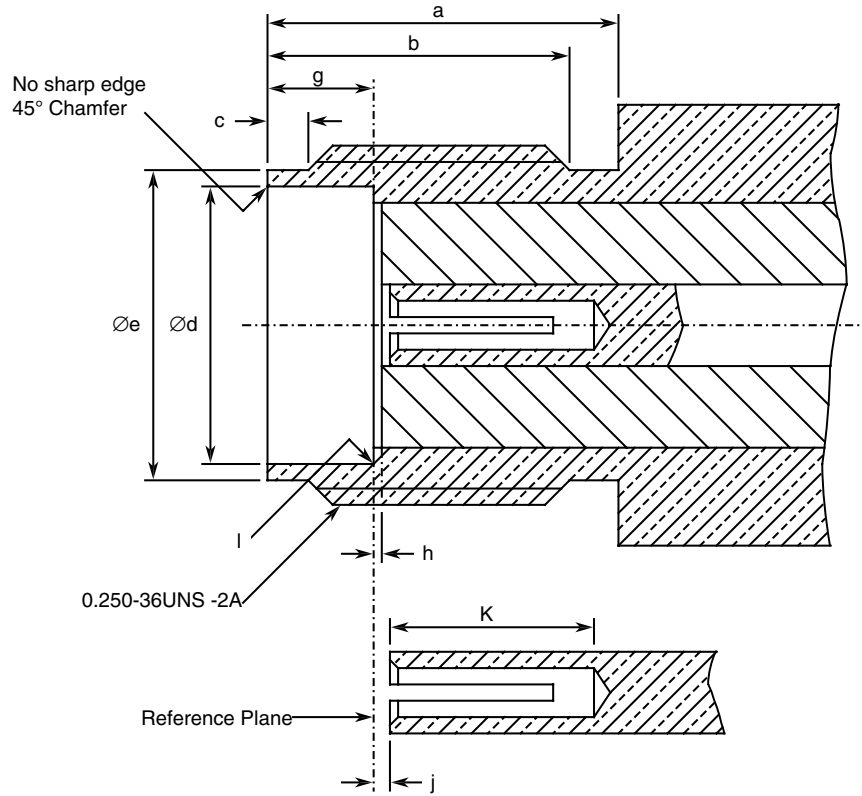

| Symbols | Dimensions mm | | Notes |
|---------|---------------|------|--------|
| | Min | Max | |
| a | 5.54 | - | |
| b | 4.32 | - | |
| c | 0.38 | 1.14 | |
| Ød | 4.597 | 4.67 | |
| Øe | 5.28 | 5.49 | |
| g | 1.88 | 1.98 | |
| h | 0 | 0.2 | |
| j | 0 | 0.25 | |
| k | 2.92 | - | |
| l | - | 0.04 | Radius |

Male Interface

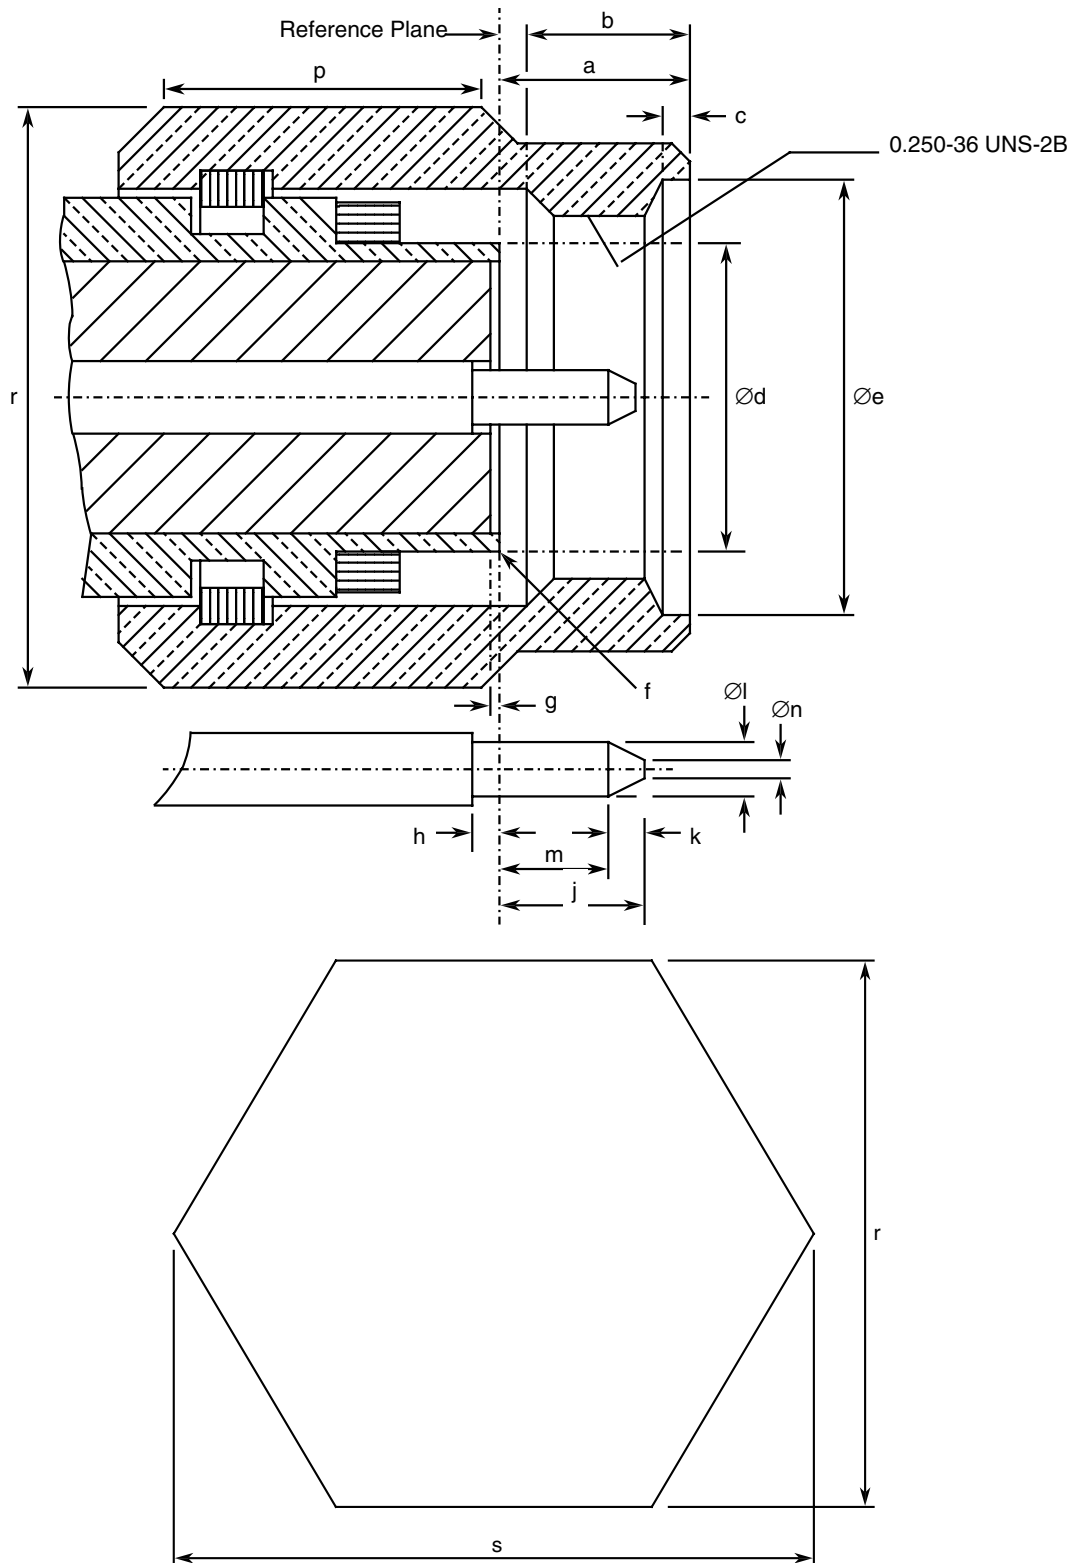


| Symbols | Dimensions mm | | Notes |
|---------|---------------|-------|-----------------------|
| | Min | Max | |
| a | - | 3.43 | |
| b | 2.54 | - | |
| c | 0.38 | 1.14 | |
| Ød | - | 4.592 | |
| Øe | 6.35 | - | |
| f | - | 0.08 | Radius or 45° chamfer |
| g | 0 | 0.2 | |
| h | 0 | 0.25 | |
| j | - | 2.54 | |
| k | 0.38 | - | |
| Øl | 0.9 | 0.94 | |
| m | 1.27 | - | |
| Øn | - | 0.38 | |
| p | 3.17 | - | |
| Øq | - | - | |
| r | 7.84 | 8 | Hexagon |
| s | - | 9.2 | |

| Symbols | Dimensions mm | | Notes |
|---------|---------------|------|-----------------|
| | Min | Max | |
| a | 3.81 | - | |
| b | 1.88 | 1.98 | |
| c | 0 | 0.08 | Contact recess |
| ØD | 5.28 | 5.49 | |
| Øg | 4.6 | 4.67 | |
| Øh | 4.1 | 4.13 | |
| j | 0.13 | 0.23 | 2 or more slots |
| Øk | 1.27 | 1.29 | |
| Øm | 0.72 | 0.84 | After closing |
| n | 0.38 | 1.14 | |
| p | 0 | 0.05 | Insert recess |
| u | 2.54 | - | |
| Øt | 0.94 | 0.99 | |
| v | 1.91 | 2.41 | |
| α | - | 0.25 | 45° Chamfer |
| β | 0.99 | 1.19 | 45° Chamfer |

NOTES:

1. No fillet permitted. Radial undercut 0.2mm maximum deep x 0.89mm maximum long permitted.

Male Interface

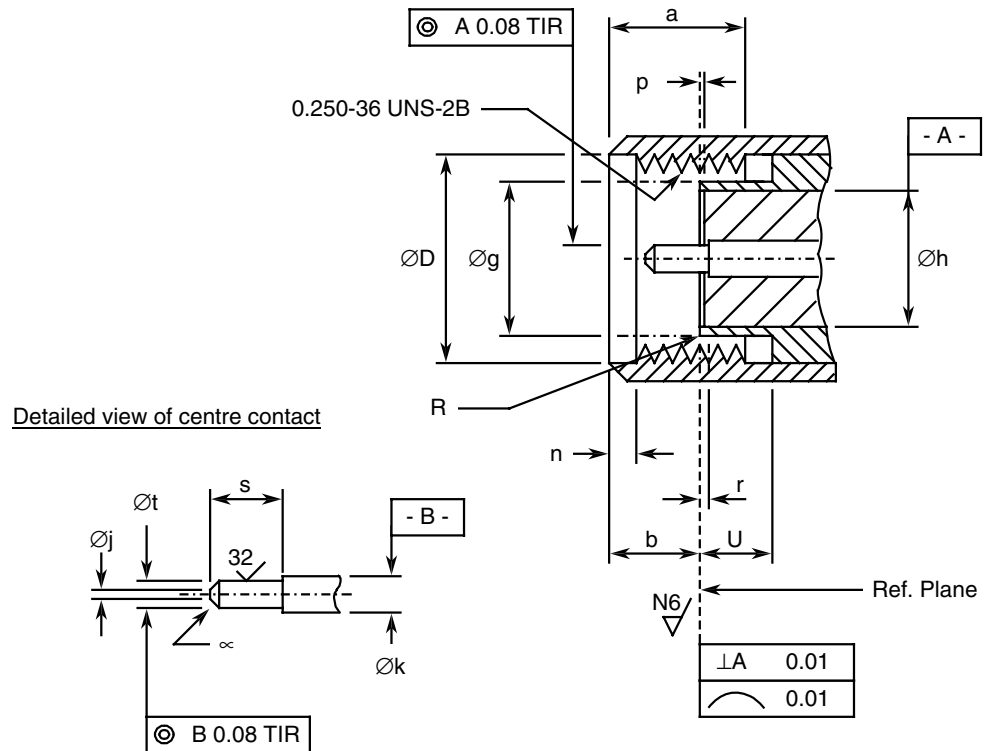

| Symbols | Dimensions mm | | Notes |
|-------------|---------------|------|--------------------------|
| | Min | Max | |
| a | 3.71 | 4.32 | |
| b | 2.59 | 3.35 | |
| $\text{Ø}D$ | 6.48 | 6.73 | |
| $\text{Ø}g$ | 4.34 | 4.59 | |
| $\text{Ø}h$ | 4.1 | 4.13 | |
| $\text{Ø}j$ | - | 0.38 | Flat |
| $\text{Ø}k$ | 1.27 | 1.29 | |
| n | 0.64 | 1.14 | |
| p | 0 | 0.05 | Insert recess |
| r | 0 | 0.08 | Contact recessed |
| R | - | 0.08 | Radius |
| s | 2.03 | 2.29 | |
| $\text{Ø}t$ | 0.9 | 0.93 | |
| U | 2.03 | - | |
| α | - | - | $45 \pm 3^\circ$ Chamfer |

1.7 MATERIALS AND FINISHES

Materials and finishes shall be as follows:

- a. Shell: Amagnetic Stainless Steel, electro-passivated
- b. Coupling Nut: Amagnetic Stainless Steel, electro-passivated
- c. Centre Contact: Beryllium Copper, with nickel underplate (2µm minimum) and Gold plating (1.3µm minimum)
- d. Inserts: PTFE
- e. Gaskets: Silicone rubber.

2. REQUIREMENTS

2.1 GENERAL

The complete requirements for procurement of the components specified herein are as stated in this specification and the ESCC Generic Specification. Permitted deviations from the Generic Specification, applicable to this specification only, are listed below.

Permitted deviations from the Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirement and do not affect the component's reliability, are listed in the appendices attached to this specification.

2.1.1 Deviations from the Generic Specification

2.1.1.1 *Deviations from Qualification and Periodic Tests - Chart F4*

- (a) Residual Magnetism: is not applicable

2.2 MARKING

The marking shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and as follows.

The information to be marked on the component shall be:

- (a) The ESCC qualified components symbol (for ESCC qualified components only).
- (b) The ESCC Component Number.
- (c) Traceability information.


2.3 CONTACT ENGAGEMENT AND SEPARATION FORCES TEST

Ref. Contact Engagement and Separation Forces in the ESCC Generic Specification.

- a) Oversize Test Pin
Pin diameter : 0.9525/0.955mm
Insertion depth : 0.76/1.14mm
- b) Maximum Diameter Test Pin
Pin diameter : 0.94/0.942mm

Engagement depth : 1.27/1.91mm
 Engagement force: 1360g maximum.

- c) Minimum Diameter Test Pin
 Pin diameter : 0.902/0.904mm
 Separation depth: 1.27/1.91mm
 Separation force: 28.4g minimum.

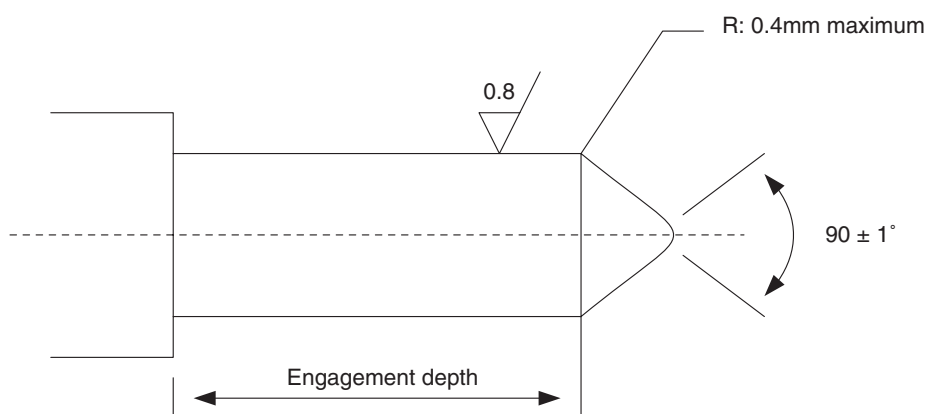

2.4 COUPLING PROOF TORQUE TEST

Ref. Coupling Proof Torque in the ESCC Generic Specification.
 Coupling Proof Torque: 170N.cm.

2.5 MATING AND UNMATING FORCES TEST

Ref. Mating and Unmating Forces in the ESCC Generic Specification.
 Maximum Torque during mating or unmating: 24N.cm.

2.6 ELECTRICAL MEASUREMENTS AT ROOM, HIGH AND LOW TEMPERATURES

The measurements shall be performed at room, high and low temperatures.

2.6.1 Room Temperature Electrical Measurements

The measurements shall be performed at $T_{amb}=+22 \pm 3^{\circ}C$.

| Characteristics | Symbols | Test Method and Conditions | Limits | | Units |
|-----------------------------------|---------|------------------------------------|--------|--------|-------|
| | | | Min | Max | |
| Voltage Standing Wave Ratio | VSWR | ESCC No. 3403 f = 0 to 22GHz | - | Note 1 | - |
| Attenuation (spot frequencies) | Att | ESCC No. 3403 f =2, 12.4, 22GHz | Note 2 | Note 2 | dB |

| Characteristics | Symbols | Test Method and Conditions | Limits | | Units |
|--|---------|---|--------|--------|-----------|
| | | | Min | Max | |
| Attenuation (full frequency range) | Att | ESCC No. 3403 f = 0 to 22GHz Note 3 | Note 2 | Note 2 | dB |
| Attenuation Flatness (full frequency range) | AttF | f = 0 to 22GHz Note 5 | - | Note 4 | dB/0.5GHz |

NOTES:

1. The limits for VSWR are as specified in Component Type Variants and Range of Components.
2. The limits for Attenuation are as specified in Component Type Variants and Range of Components: Nominal Attenuation + Attenuation Tolerance.
3. Attenuation across full frequency range shall only be tested during Screening Tests during Room Temperature Electrical Measurements.
4. The limits for Attenuation Flatness are as specified in Component Type Variants and Range of Components.
5. Guaranteed but not tested.

2.6.2 High and Low Temperatures Electrical Measurements

The measurements shall be performed at $T_{amb}=+125 (+0 -3) ^\circ\text{C}$ and $T_{amb}=-55 (+3 -0) ^\circ\text{C}$.

| Characteristics | Symbols | Test Method and Conditions (Note 1) | Limits | | Units |
|--|------------|-------------------------------------|--------|--------------------|-------------------------|
| | | | Min | Max | |
| Temperature Coefficient of Attenuation (spot frequencies) | TC_{Att} | ESCC No. 3403 f=2, 12.4, 22GHz | - | 7×10^{-4} | dB/dB/ $^\circ\text{C}$ |

NOTES:

1. Measurements shall be performed during Screening Tests on a sample of 2 components. In the event of any failure a 100% inspection shall be performed.

2.7 PARAMETER DRIFT VALUES

Unless otherwise specified, the measurements shall be performed at $T_{amb}=+22 \pm 3^\circ\text{C}$.

The test methods and test conditions shall be as per the corresponding test defined in Room Temperature Electrical Measurements.

The drift values (Δ) shall not be exceeded for each characteristic where specified. The corresponding absolute limit values for each characteristic shall not be exceeded.

| Characteristics | Symbols | Drift Value Δ | Units |
|-----------------------------------|----------------------------|-----------------------------------|-------------|
| Voltage Standing Wave Ratio | $\frac{\Delta VSWR}{VSWR}$ | ± 2 | % |
| Attenuation (Spot frequencies) | Δ Att | ± 0.05 or (1) ± 0.5 | dB % |

NOTES:

1. Whichever is greater.

2.8

INTERMEDIATE AND END-POINT ELECTRICAL MEASUREMENTS

Unless otherwise specified, the measurements shall be performed at $T_{amb}=+22 \pm 3^{\circ}C$.

The test methods and test conditions shall be as per the corresponding test defined in Room Temperature Electrical Measurements.

The drift values (Δ) shall not be exceeded for each characteristic where specified. The corresponding absolute limit values for each characteristic shall not be exceeded.

| Test Reference per ESCC No. 3403 | Characteristics | Symbols | Limits | | Units |
|----------------------------------|---|---------------------|--|---|---------------|
| | | | Min | Max | |
| Vibration | | | | | |
| Initial Measurements | Attenuation | Att | Note 1 | Note 1 | dB |
| Measurements during last cycle | Intermittent contact | - | No discontinuity > 0.5ms No open or short circuit | | - |
| Final Measurements | Attenuation | Att | Note 1 | Note 1 | dB |
| | Attenuation Drift (from initial measurement) | Δ Att | - | ± 0.05 or (2) ± 0.5 | dB % |
| Shock | | | | | |
| Initial Measurements | Attenuation (Note 3) | Att | Note 1 | Note 1 | dB |
| Final Measurements | Attenuation Attenuation Drift (from initial measurement) | Att Δ Att | Note 1 - | Note 1 ± 0.05 or (2) ± 0.5 | dB dB % |
| Rapid Change of Temperature | | | | | |
| Initial Measurements | Attenuation | Att | Note 1 | Note 1 | dB |
| Final Measurements | Attenuation Attenuation Drift (from initial measurement) | Att Δ Att | Note 1 - | Note 1 ± 0.05 or (2) ± 0.5 | dB dB % |
| Climatic Sequence | | | | | |
| Initial Measurements | Attenuation (Note 3) | Att | Note 1 | Note 1 | dB |
| Measurements during Dry Heat | Temperature Coefficient of Attenuation | TC_{Att} | - | 7×10^{-4} | dB/dB/°C |
| Measurements during Cold | Temperature Coefficient of Attenuation | TC_{Att} | - | 7×10^{-4} | dB/dB/°C |
| Final Measurements | Attenuation Attenuation Drift (from initial measurement) | Att Δ Att | Note 1 - | Note 1 ± 0.1 or (2) ± 1 | dB dB % |
| Connector Repeatability | Attenuation Attenuation Drift (during test) | Att Δ Att | Note 1 - | Note 1 ± 0.05 or (2) ± 0.5 | dB dB % |

| Test Reference per ESCC No. 3403 | Characteristics | Symbols | Limits | | Units |
|---------------------------------------|---|---------------------|-------------|---|-----------------|
| | | | Min | Max | |
| Operating Life | | | | | |
| Initial Measurements | Attenuation (Note 3) | Att | Note 1 | Note 1 | dB |
| Final Measurements | Attenuation Attenuation Drift (from initial measurement) | Att Δ Att | Note 1 - | Note 1 ± 0.1 or (2) ± 1 | dB dB % |
| RF Leakage | RF leakage $f = 0$ to 22GHz | E | -85 | - | dB _i |
| Peak Power | | | | | |
| Final Measurements | Attenuation | Att | Note 1 | Note 1 | dB |
| Power Sensitivity ($P_{ref} = 1mW$) | | | | | |
| Initial Measurements | Attenuation | Att | Note 1 | Note 1 | dB |
| Final Measurements | Attenuation Attenuation Drift (from initial measurement) | Att Δ Att | Note 1 - | Note 1 ± 0.05 or (2) ± 0.5 | dB dB % |

NOTES:

1. The limits for attenuation are as specified in Component Type Variants and Range of Components: Nominal Attenuation + Attenuation Tolerance.
2. Whichever is greater.
3. This test need not be repeated. The most recent result from the previous test may be used instead.

2.9

BURN-IN CONDITIONS

| Characteristics | Symbols | Test Conditions | Units |
|---------------------|-----------|-----------------|-------------|
| Ambient Temperature | T_{amb} | +125 | $^{\circ}C$ |
| Power | P_{in} | 0 | W |

2.10

OPERATING LIFE CONDITIONS

| Characteristics | Symbols | Test Conditions | Units |
|---------------------|-----------|-----------------|-------------|
| Ambient Temperature | T_{amb} | +25 | $^{\circ}C$ |
| Power | P_{in} | Note 1 | W |
| Frequency | f_{in} | 18 | GHz |

NOTES:

1. Rated RF Power as specified in Maximum Ratings.