



Page i

**CAPACITORS, FIXED,
CERAMIC DIELECTRIC, TYPE I,
BASED ON TYPE CCR 05
ESCC Detail Specification No. 3001/018**

**ISSUE 1
October 2002**



Document Custodian: European Space Agency - see <https://escies.org>

	ESCC Detail Specification		PAGE ii ISSUE 1
---	---------------------------	--	--------------------

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2002. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole in any medium without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.



europaean space agency
agence spatiale européenne

Pages 1 to 17

**CAPACITORS, FIXED,
CERAMIC DIELECTRIC, TYPE I,
BASED ON TYPE CCR 05
ESA/SCC Detail Specification No. 3001/018**



**space components
coordination group**

Issue/Rev.	Date	Approved by	
		SCCG Chairman	ESA Director General or his Deputy
Issue 3	May 1995	<i>P. Nommelet</i>	<i>J. J. ...</i>
Revision 'A'	May 1996	<i>P. Nommelet</i>	<i>J. J. ...</i>
Revision 'B'	November 1997	<i>S. Smith</i>	<i>J. J. ...</i>



DOCUMENTATION CHANGE NOTICE

Rev. Letter	Rev. Date	Reference	CHANGE Item	Approved DCR No.
		This Issue supersedes Issue 2 and incorporates all modifications defined in Revisions 'A', 'B', 'C' and 'D' to Issue 2 and the following DCR's:-		
		Cover page		None
		DCN		None
		Table 1(a)	: Columns rearranged	23720
		Table 1(b)	: Temperature Coefficient entry deleted and Symbols revised	23720
		Figure 1	: Entry added	23720
		Figure 2	: Symbols revised	23720
		Para. 4.2.3	: Title amended	23720
		Para. 4.5	: Entries rewritten, including sub-paragraphs	23720
		Para. 4.6	: Title amended	23720
		Para. 4.7	: Title amended	23720
		Para. 4.7.3	: Paragraph added	23720
		Table 2	: Rewritten (Limits remain unchanged)	23720
		Table 3	: Rewritten (Limits remain unchanged)	23720
		Table 4	: Rewritten (Limits remain unchanged)	23720
		Table 5	: Title amended and Duration deleted from Table	23720
		Figure 5	: Entry added	23720
		Para. 4.8	: Entries rewritten, including sub-paragraphs	23720
		Para. 4.8.5	: Paragraph added	23720
		Table 6	: Reformatted and rewritten (Limits remain unchanged)	23720
'A'	May '96	P1. Cover page	: Page count reduced by 1	None
		P2. DCN		None
		P4. T of C	: Appendix 'A' deleted and "None" added	221326
		P12. Table 2	: No. 5, in Remarks, Note reference deleted	221286
			: Note 2 deleted	221286
		P17. Appendix 'A'	: Page deleted therefore not included as the Vitramon Appendix is no longer applicable	221326
'B'	Nov. '97	P1. Cover page	: Page count increased by 1	None
		P2. DCN		None
		P4. T of C	: For Appendix 'A', "None" deleted and entry added	23870
		P17. Appendix 'A'	: New Appendix added with new page	23870

**TABLE OF CONTENTS**

	<u>Page</u>
1. <u>GENERAL</u>	5
1.1 Scope	5
1.2 Range of Components	5
1.3 Maximum Ratings	5
1.4 Parameter Derating Information	5
1.5 Physical Dimensions	5
1.6 Functional Diagram	5
2. <u>APPLICABLE DOCUMENTS</u>	5
3. <u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u>	5
4. <u>REQUIREMENTS</u>	8
4.1 General	8
4.2 Deviations from Generic Specification	8
4.2.1 Deviations from Special In-process Controls	8
4.2.2 Deviations from Final Production Tests	8
4.2.3 Deviations from Burn-in and Electrical Measurements	8
4.2.4 Deviations from Qualification Tests	8
4.2.5 Deviations from Lot Acceptance Tests	8
4.3 Mechanical Requirements	8
4.3.1 Dimension Check	8
4.3.2 Weight	8
4.3.3 Robustness of Terminations	8
4.4 Materials and Finishes	9
4.4.1 Case	9
4.4.2 Lead Material and Finish	9
4.5 Marking	9
4.5.1 General	9
4.5.2 The SCC Component Number	9
4.5.3 Electrical Characteristics and Ratings	10
4.5.4 Traceability Information	11
4.6 Electrical Measurements	11
4.6.1 Electrical Measurements at Room Temperature	11
4.6.2 Electrical Measurements at High and Low Temperatures	11
4.6.3 Circuits for Electrical Measurements	11
4.7 Burn-in Tests	11
4.7.1 Parameter Drift Values	11
4.7.2 Conditions for Burn-in	11
4.7.3 Electrical Circuit for Burn-in	11
4.8 Environmental and Endurance Tests	14
4.8.1 Measurements and Inspections on Completion of Environmental Tests	14
4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests	14
4.8.3 Measurements and Inspections on Completion of Endurance Tests	14
4.8.4 Conditions for Operating Life Tests	14
4.8.5 Electrical Circuit for Operating Life Tests	14



TABLES

	<u>Page</u>
1(a) Range of Components	6
1(b) Maximum Ratings	6
2 Electrical Measurements at Room Temperature	12
3 Electrical Measurements at High and Low Temperatures	12
4 Parameter Drift Values	13
5 Conditions for Burn-in and Operating Life Tests	13
6 Measurements and Inspections on Completion of Environmental Tests and at Intermediate Points and on Completion of Endurance Testing	15

FIGURES

1 Parameter Derating Information	N/A
2 Physical Dimensions	7
3 Functional Diagram	7
4 Circuits for Electrical Measurements	N/A
5 Electrical Circuit for Burn-in and Operating Life Tests	N/A

APPENDICES (Applicable to specific Manufacturers only)

'A' Agreed Deviations for Vitramon (F)	17
--	----

**1. GENERAL****1.1 SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data for Capacitors, Fixed, Ceramic Dielectric, Temperature Compensating, Type I, based on Type CCR 05. It shall be read in conjunction with ESA/SCC Generic Specification No. 3001, the requirements of which are supplemented herein.

1.2 RANGE OF COMPONENTS

The range of capacitors covered by this specification is given in Table 1(a).

1.3 MAXIMUM RATINGS

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the capacitors specified herein are scheduled in Table 1(b).

1.4 PARAMETER DERATING INFORMATION (FIGURE 1)

Not applicable.

1.5 PHYSICAL DIMENSIONS

The physical dimensions of the capacitors specified herein are shown in Figure 2.

1.6 FUNCTIONAL DIAGRAM

The functional diagram for the capacitors specified herein is shown in Figure 3.

2. APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESA/SCC Generic Specification No. 3001 for Capacitors, Fixed, Ceramic Dielectric, Types I and II.

3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic Specification No. 21300 shall apply. In addition the following symbols are used:-

V_T = Test Voltage.

**TABLE 1(a) - RANGE OF COMPONENTS**

Variant	Capacitance Range (pF)	Capacitance Tolerance (\pm)	Rated Voltage (U_R) (V)	Value Series	TC (ppm/ $^{\circ}$ C)
Note 1	1 to 9.1	0.10pF	200	E24	± 60
	1 to 9.1	0.25pF	200	E24	± 60
	1 to 9.1	0.50pF	200	E24	± 60
	10 to 47	0.50pF	200	E96	± 30
	10 to 47	1.0%	200	E96	± 30
	47 to 1 000	1.0%	200	E96	± 30
	360 to 3 900	2.0%	100	E48	± 30
	2 200 to 4 700	5.0%	50	E24	± 30

NOTES

- The above range of components is available in alternate lead lengths (see Figure 2, Dimension L).
L = 31.75mm minimum should be ordered as Type Variant 01.
L = 12mm minimum should be ordered as Type Variant 02.

TABLE 1(b) - MAXIMUM RATINGS

No.	Characteristics	Symbol	Limits		Unit	Remarks
			Min.	Max.		
1	Rated Voltage	U_R	-	200 100 50	V	See Table 1(a)
2	Operating Temperature Range	T_{op}	- 55	+ 125	$^{\circ}$ C	Without derating
3	Storage Temperature Range	T_{stg}	- 55	+ 125	$^{\circ}$ C	
4	Soldering Temperature	T_{sol}	-	+ 260	$^{\circ}$ C	Note 1

NOTES


- Duration 10 seconds maximum at a distance of not less than 3.0mm from the device body and the same lead shall not be resoldered until 3 minutes have elapsed.

FIGURE 1 - PARAMETER DERATING INFORMATION

Not applicable.




FIGURE 2 - PHYSICAL DIMENSIONS

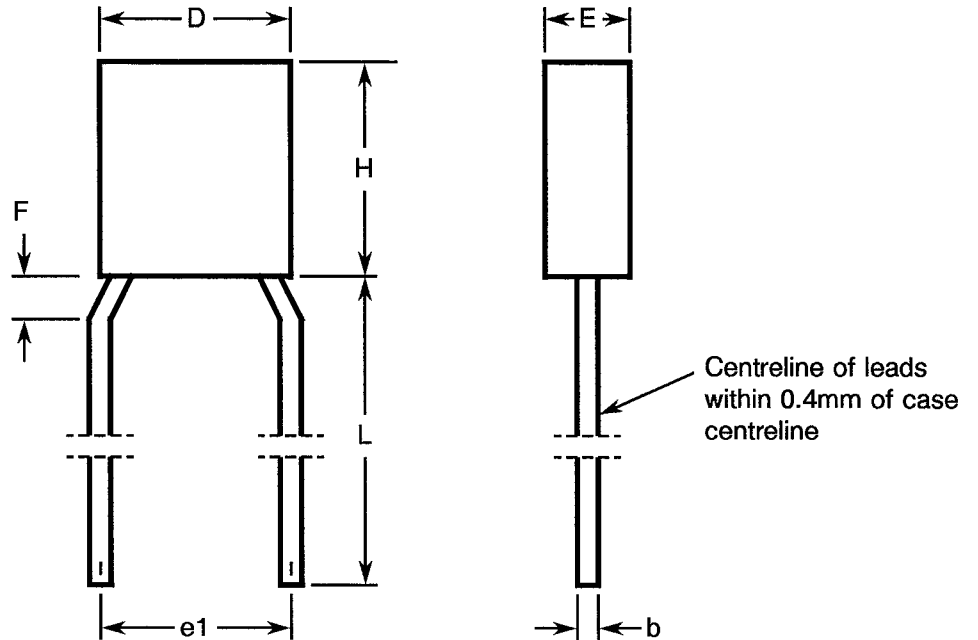

SYMBOL	DIMENSIONS (mm)	
	MIN.	MAX.
b	0.54	0.66
D	-	5.10
e1	4.70	5.50
E	-	2.55
F	-	1.14
H	-	5.10
L	See Table 1(a)	

FIGURE 3 - FUNCTIONAL DIAGRAM





4. REQUIREMENTS

4.1 GENERAL

The complete requirements for procurement of the capacitors specified herein are stated in this specification and ESA/SCC Generic Specification No. 3001 for Capacitors, Fixed, Chips, Ceramic Dielectric, Types I and II. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESA/SCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Special In-process Controls

None.

4.2.2 Deviations from Final Production Tests (Chart II)

None.

4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)

None.

4.2.4 Deviations from Qualification Tests (Chart IV)

None.

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

None.

4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the capacitors specified herein shall be verified in accordance with the requirements set out in Para. 9.4 of ESA/SCC Generic Specification No. 3001 and they shall conform to those shown in Figure 2 of this specification.

4.3.2 Weight

The maximum weight of the capacitors specified herein shall be 0.3 grammes.

4.3.3 Robustness of Terminations

The requirements for robustness of terminations are specified in Para. 9.7 of ESA/SCC Generic Specification No. 3001. The test conditions shall be as follows:-

(a) **Applied Force:** 10N, tensile.

(b) **Duration:** 10s.

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the capacitors specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

4.4.1 Case

As a minimum, a thermo-setting resin moulding or a preformed case shall ensure the protection of the capacitors.

4.4.2 Lead Material and Finish

The lead material shall be Type 'A' with Type '3 or 4' finish in accordance with the requirements of ESA/SCC Basic Specification No. 23500. At any cross-section, the maximum thickness of the sheath shall not exceed twice the minimum thickness of the sheath.

4.5 MARKING

4.5.1 General


The marking of components delivered to this specification shall be in accordance with the requirements of ESA/SCC Basic Specification No. 21700 and the following paragraphs. When the component is too small to accommodate all of the marking specified, as much as space permits shall be marked and the marking information, in full, shall accompany the component in its primary package.

The information to be marked and the order of precedence, shall be as follows:-

- (a) The SCC Component Number.
- (b) Electrical Characteristics and Ratings.
- (c) Traceability Information.

4.5.2 The SCC Component Number

The SCC Component Number shall be constituted and marked as follows:-

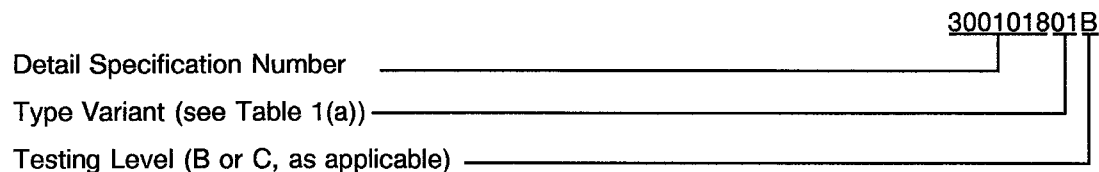




4.5.3 Electrical Characteristics and Ratings

The electrical characteristics and ratings to be marked in the following order of precedence are:-

- (a) Capacitance Value.
- (b) Tolerance.
- (c) Temperature Coefficient.
- (d) Rated Voltage.

The information shall be constituted and marked as follows:-

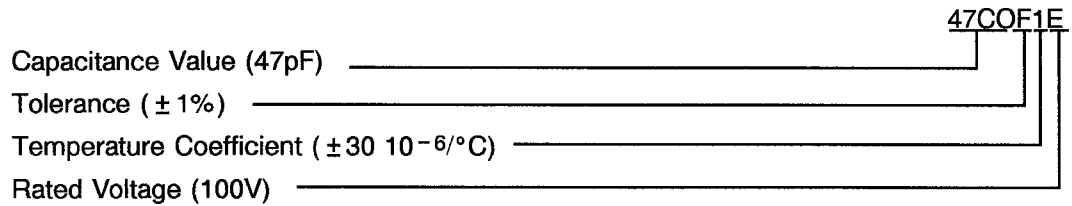

4.5.3.1 Capacitance Values

The capacitance values shall be expressed by means of the following codes. The unit quantity for marking shall be in picofarads.

Capacitance Value	Code
X.XX	XCXX
XX.X	XXCX
XXX	XXX0
XXX10 ¹	XXX1
XXX10 ²	XXX2

4.5.3.2 Tolerances

The tolerances on capacitance values shall be indicated by the code letters specified hereafter.

Tolerance	Code Letter
0.1pF	B
0.25pF	C
0.5pF	D
1.0%	F
2.0%	G
5.0%	J

4.5.3.3 Temperature Coefficient

The temperature coefficient shall be indicated by the code numbers specified hereafter.

Temp. Coefficient (10 ⁻⁶ /°C)	Code Number
± 30	1
± 60	2



4.5.3.4 Rated Voltage

The rated voltage shall be indicated by the code letters specified hereafter.

Rated Voltage (U_R)	Code Letter
50	C
100	E
200	G

4.5.4 Traceability Information

Traceability information shall be marked in accordance with the requirements of ESA/SCC Basic Specification No. 21700.

- (a) Manufacturing Date Code.
- (b) Serial Number.
- (c) Manufacturer's Name.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured at room temperature are scheduled in Table 2. Unless otherwise specified, measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3. The measurements shall be performed at $T_{amb} = +125(+0 - 5)$ and $-55(+5 - 0)$ °C respectively.

4.6.3 Circuits for Electrical Measurements

A circuit for use in performing the electrical measurements listed in Table 2 of this specification is shown in ESA/SCC Generic Specification No. 3001.

4.7 BURN-IN TESTS

4.7.1 Parameter Drift Values

The parameter drift values applicable to burn-in are specified in Table 4 of this specification. Unless otherwise stated, measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

The parameter drift values (Δ) applicable to the parameters scheduled shall not be exceeded. In addition to these drift value requirements for a given parameter, the appropriate limit value specified in Table 2 shall not be exceeded.

4.7.2 Conditions for Burn-in

The requirements for burn-in are specified in Section 7 of ESA/SCC Generic Specification No. 3001. The conditions for burn-in shall be as specified in Table 5 of this specification.

On completion of burn-in, a recovery period of 24 ± 2 hours is necessary before performance of the end-measurements.

4.7.3 Electrical Circuit for Burn-in (Figure 5)

Not applicable.

**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE**

No.	Characteristics	Symbol	ESA/SCC 3001 Test Conditions	Limits		Unit	Remarks
				Min	Max		
1	Capacitance	C	Para. 9.5.1.1	See Table 1(a)		%	
2	Tangent of Loss Angle	Tgδ	Para. 9.5.1.2	-	15 (1)	10 ⁻⁴	
3	Insulation Resistance	Ri	Para. 9.5.1.3	100	-	GΩ	
4	Voltage Proof Dielectric	VP	Para. 9.5.1.4	2.5U _R	-	V	
5	Voltage Proof Body Insulation	VP _B	Para. 9.5.1.4	1300	-	V	

NOTES

- For $1 < C < 50\text{pF}$: $Tg\delta \leq 1.5 \left(\frac{150}{C} + 7 \right) 10^{-4}$.

TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES

No.	Characteristics	Symbol	ESA/SCC 3001 Test Conditions	Limits		Unit	Remarks
				Min	Max		
3	Insulation Resistance at T _{amb} = +125 ± 3 °C	Ri	Para. 9.5.1.3	10 000	-	MΩ	Note 1
6(i)	Temperature Coefficient	TC	Para. 9.16 Between -55 and +20 ± 2 °C Between +20 and +125 ± 2 °C	-30 -30	+30 +30	10 ⁻⁶ /°C	5 parts for each capacitance value Notes 2, 4, 5 and 6
6(ii)	Temperature Coefficient	TC	Para. 9.16 Between +20 and +125 ± 2 °C	-30	+30	10 ⁻⁶ /°C	5 parts for each fired ceramic lot Notes 3, 4, 5 and 6

NOTES

- Single sample. Inspection Level S3, AQL 2.5%.
- Applicable to Level 'B' only.
- Applicable to Level 'C' only.
- If 1 failure occurs out of the 5 parts, then test 100%. 1% reject maximum allowed in the case of 100% testing.
- Due to measurement uncertainty for small values of capacitance (typically <20pF) it may be necessary to accept wider limits than those specified. In this instance, the Customer shall agree with the Manufacturer any such deviation.
- Temperature coefficient for capacitance values between 1 and 9.1pF: ± 60.10⁻⁶/°C.

FIGURE 4 - CIRCUITS FOR ELECTRICAL MEASUREMENTS

Not applicable.

TABLE 4 - PARAMETER DRIFT VALUES

No.	Characteristics	Symbol	Spec. and/or Test Method	Test Conditions	Change Limits (Δ)	Unit
1	Capacitance Change	$\frac{\Delta C}{C}$	As per Table 2	As per Table 2	± 0.1 or (1) ± 1.0	pF %

NOTES

1. Whichever is greater. $\pm 0.5\%$ shall be used for 1.0% tolerance components.

TABLE 5 - CONDITIONS FOR BURN-IN AND OPERATING LIFE TESTS

No.	Characteristic	Symbol	Condition	Unit
1	Ambient Temperature	T_{amb}	+ 125	$^{\circ}C$
2	Test Voltage	V_T	$2.0U_R$	V

FIGURE 5 - ELECTRICAL CIRCUIT FOR BURN-IN AND OPERATING LIFE TESTS

Not applicable.



- 4.8 ENVIRONMENTAL AND ENDURANCE TESTS (CHARTS IV AND V OF ESA/SCC GENERIC SPECIFICATION NO. 3001)
- 4.8.1 Measurements and Inspections on Completion of Environmental Tests
The parameters to be measured and inspections to be performed on completion of environmental tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.
- 4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests
The parameters to be measured and inspections to be performed at intermediate points during endurance tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.
- 4.8.3 Measurements and Inspections on Completion of Endurance Tests
The parameters to be measured and inspections to be performed on completion of endurance testing are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.
- 4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)
The requirements for operating life testing are specified in Section 9 of ESA/SCC Generic Specification No. 3001. The conditions for operating life testing shall be as specified in Table 5 for the Burn-in test
- 4.8.5 Electrical Circuit for Operating Life Tests (Figure 5)
Not applicable.



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING

NO.	ESA/SCC GENERIC SPEC. NO. 3001		MEASUREMENTS AND INSPECTIONS		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL AND ENDURANCE TESTS (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN.	MAX.	
01	Robustness of Terminations	Para. 9.7 and Para. 4.3.3 of this specification	Visual Examination	-	-	-	-	-
02	Resistance to Soldering Heat	Para. 9.8	Initial Measurements Capacitance	Table 2 Item 1	C	Table 2 Item 1		pF
			Final Measurements Capacitance Change Insulation Resistance	After a recovery period of 24 ± 2 hrs Table 2 Item 1 Table 2 Item 3	ΔC/C Ri	-5.0 100	+5.0 -	% GΩ
03	Solderability	Para. 9.9	Visual Examination	-	-	-	-	-
04	Rapid Change of Temperature	Para. 9.10	Initial Measurements Capacitance	Table 2 Item 1	C	Table 2 Item 1		pF
			Final Measurements Visual Examination Capacitance Change Tangent of Loss Angle	After a recovery period of 24 ± 2 hrs - Table 2 Item 1 Table 2 Item 2	- ΔC/C Tgδ	- -5.0 -	- +5.0 30	- % 10 ⁻⁴
05	Vibration	Para. 9.11	During Last Cycle Intermittent Contact	Para. 9.11.3 Open or Shorts	-	-	-	-
			After Test Visual Examination	-	-	-	-	-
06	Shock or Bump	Para. 9.12	Visual Examination	-	-	-	-	-
07	Climatic Sequence	Para. 9.13	Initial Measurements Capacitance	Table 2 Item 1	C	Table 2 Item 1		pF
			Final Measurements External Visual Inspection	After a recovery period of 1 to 24 hrs Para. 9.3 of ESA/SCC3001	-	-	-	-
			Capacitance Change	Table 2 Item 1	ΔC/C	-5.0	+5.0	%
			Tangent of Loss Angle	Table 2 Item 2	Tgδ	-	30	10 ⁻⁴
			Insulation Resistance	Table 2 Item 3	Ri	10	-	GΩ
Voltage Proof - Body Insulation	Table 2 Item 5	VP _B	1300	-	V			

NOTES



1. The tests in this Table refer to either Chart IV or V and shall be used as applicable.



TABLE 6 - MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING (CONT'D)

NO.	ESA/SCC GENERIC SPEC. NO. 3001		MEASUREMENTS AND INSPECTIONS		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL AND ENDURANCE TESTS (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN.	MAX.	
08	Damp Heat, Steady State	Para. 9.14	Initial Measurements Capacitance Final Measurements Visual Examination Capacitance Change Tangent of Loss Angle Insulation Resistance Voltage Proof - Body Insulation	Table 2 Item 1 After a recovery period of 6 to 24 hrs - Table 2 Item 1 Table 2 Item 2 Table 2 Item 3 Table 2 Item 5	C - $\Delta C/C$ $Tg\delta$ R_i VP_B	Table 2 Item 1 - -5.0 - 10 1300	- - +5.0 30 - -	pF - % 10^{-4} G Ω V
09	Operating Life	Para. 9.15 Change limits relate to initial (0- hour) measurements	Initial Measurements Capacitance Intermediate Measurements Capacitance Change Insulation Resistance Final Measurements Capacitance Change Tangent of Loss Angle Insulation Resistance Voltage Proof Dielectric Voltage Proof - Body Insulation	Table 2 Item 1 After a recovery period > 1 hr Table 2 Item 1 Table 2 Item 3 After a recovery period of 24 ± 2 hrs Table 2 Item 1 Table 2 Item 2 Table 2 Item 3 Table 2 Item 4 Table 2 Item 5	C $\Delta C/C$ R_i $\Delta C/C$ $Tg\delta$ R_i VP VP_B	Table 2 Item 1 -3.0 10 -3.0 - 50 $2.5U_R$ 1300	+3.0 - -3.0 15 - -	pF % G Ω % 10^{-4} G Ω V V
10	Temperature Coefficient	Para. 9.16	Temperature Coefficient	Table 3 Item 6(i) or 6(ii)	TC	Table 3 Item 6(i) or 6(ii)		$10^{-6}/^{\circ}C$

NOTES: See Page 15.

 	<p>ESA/SCC Detail Specification No. 3001/018</p>	<p>Rev. 'B'</p>	<p>PAGE 17 ISSUE 3</p>
--	--	-----------------	----------------------------

APPENDIX 'A'

Page 1 of 1

AGREED DEVIATIONS FOR VITRAMON (F)

ITEMS AFFECTED	DESCRIPTION OF DEVIATIONS
Para. 4.2.2	Para. 4.4, Marking: The Temperature Coefficient Code defined in Para. 4.5.3(c) of this specification need not be marked on the component.