



CAPACITORS, FIXED, METALLISED

PLASTIC FILM DIELECTRIC

BASED ON TYPES CRH01 THROUGH CRH05

ESCC Detail Specification No. 3006/001

ISSUE 1

October 2002



	ESCC Detail Specification		PAGE ii ISSUE 1
--	---------------------------	--	--------------------

LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2002. All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without the prior permission of the European Space Agency and provided that it is not used for a commercial purpose, may be:

- copied in whole in any medium without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.





europaean space agency
agence spatiale européenne

Pages 1 to 25

CAPACITORS, FIXED, METALLIZED
PLASTIC FILM DIELECTRIC
BASED ON TYPES CRH 01 THROUGH CRH 05
ESA/SCC Detail Specification No. 3006/001



**space components
coordination group**

Issue/Rev.	Date	Approved by	
		SCCG Chairman	ESA Director General or his Deputy
Issue 3	November 1982	-	-
Revision 'A'	June 1984	-	-
Revision 'B'	January 1988	-	-
Revision 'C'	August 1989	-	-
Revision 'D'	January 1993	-	-
Revision 'E'	June 1993	-	-
Revision 'F'	October 1994		

**ESASCC**

ESA/SCC Detail Specification
No. 3006/001

Rev. 'B'

PAGE 2

ISSUE 3

DOCUMENTATION CHANGE NOTICE

Rev. Letter	Rev. Date	Reference	CHANGE Item	Approved DCR No.
		This Issue supersedes Issue 2 and incorporates all modifications agreed on the basis of the following DCR's:-		
		P1. Cover Page	: In Title, Capacitor Range extended - CRH01 added	22198
		P3. T of C	: Modification of page numbers	None
		P4. T of C	: Modification of page numbers	None
		P5. Para. 1.1	: Capacitor Range extended	22198
		P6. Table 1(a)	: V_{rms} modified, Length L modified, Length G added, Mean Weight added. Range of variants extended	22198
		P12. Figure 2	: Modified	22198
		P14. Para. 4.1	: Amended	21019
		P15. Para. 4.3.3	: Type Variant Numbers modified	22198
		P16. Para. 4.4.2	: Modified	22198
		P17. Para. 4.5.3	: Marking information modified	22198
		Para. 4.5.3.1	: Code modified	22198
		P18. Para. 4.5.3.3	: Rated Voltage Table modified	22198
		P20. Table 2	: Limit changes	22198
		Table 3	: Note (1) modified	22198
		P22. Table 4	: Limit changes, Note (1) added	22198
		Table 5	: Condition change	22198
'A'	Jun. '84	P1. Cover page		None
		P2. DCN		None
		P7. Table 1(a)	: Item No. 52, length 'G' max. changed to 25.73	23146
			: Item No. 49, length 'L' max. changed to 13.51	None
'B'	Jan. '88	P1. Cover page		None
		P2. DCN		None
		P12. Figure 2	: Existing Note numbered 1	22571
			: Notes 2 and 3 added	22571



DOCUMENTATION CHANGE NOTICE

Rev. Letter	Rev. Date	Reference	CHANGE Item	Approved DCR No.
'C'	Aug. '89	P1. Cover page P2A. DCN P20. Table 2 Table 3 P25. Table 6	: Page added : Test 3, change Min. Limit to 50 : Test 1, change Min. Limit to 0.5 : Notes 1 and 2 changed : Addition of Para. 9.15	None None 22697 22697 22697 22734
'D'	Jan. '93	P1. Cover page P2A. DCN P9. Table 1(a) P20. Table 2 P24. Table 6 P25. Table 6	: In Notes, last two lines, wire diameters changed : No. 1, U _R min. reduced : No. 2, minimum Limit amended : No. 4, insulation resistance min. amended : Negative loss tangents deleted : Negative loss tangents deleted	None None 22817 22817 22817 22817 22817
'E'	Jun. '93	P1. Cover page P2A. DCN P17. Para. 4.5.3	: Numerical value corrected (μF)	None None 23587
'F'	Oct. '94	P1. Cover page P2A. DCN P20. Table 2 Table 3	: Reference to Notes made clearer, i.e. entry amended to "(Note)" : No. 3, in Characteristics, "(Between Terminals)" added : No. 5, in Characteristics, word "Capacitance" corrected and "Note 5" added to Unit : Reference to Notes made clearer, i.e. entry amended to "(Note)" : No. 2, replaced by "Capacitance Change at $-55 \pm 3^\circ\text{C}$ " : No. 3, added "Capacitance Change at $+125 \pm 3^\circ\text{C}$ "	None None None 221103 221103 None 221103 221103
		This document has been transferred from hardcopy to electronic format. The content is unchanged but minor differences in presentation exist.		





 	ESA/SCC Detail Specification No. 3006/001	PAGE 3 ISSUE 3
---	--	-------------------

TABLE OF CONTENTS

		<u>Page</u>
1.	<u>GENERAL</u>	5
1.1	Scope	5
1.2	Range of Components	5
1.3	Maximum Ratings	5
1.4	Parameter Derating Information	5
1.5	Physical Dimensions	5
1.6	Functional Diagram	5
2.	<u>APPLICABLE DOCUMENTS</u>	14
3.	<u>TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS</u>	14
4.	<u>REQUIREMENTS</u>	14
4.1	General	14
4.2	Deviations from Generic Specification	14
4.2.1	Deviations from Special In-process Controls	14
4.2.2	Deviations from Final Production Tests (Chart II)	14
4.2.3	Deviations from Burn-in and Electrical Measurements (Chart III)	14
4.2.4	Deviations from Qualification Tests (Chart IV)	15
4.2.5	Deviations from Lot Acceptance Tests (Chart V)	15
4.3	Mechanical Requirements	15
4.3.1	Dimension Check	15
4.3.2	Weight	15
4.3.3	Robustness of Terminations	15
4.4	Materials and Finishes	15
4.4.1	Case	16
4.4.2	Leads	16
4.5	Marking	16
4.5.1	General	16
4.5.2	The SCC Component Number	16
4.5.3	Electrical Characteristics and Ratings	17
4.5.4	Traceability Information	18
4.6	Electrical Measurements	18
4.6.1	Electrical Measurements at Room Temperature	18
4.6.2	Electrical Measurements at High and Low Temperatures	18
4.6.3	Circuits for Electrical Measurements	18

 	ESA/SCC Detail Specification No. 3006/001	PAGE 4 ISSUE 3
---	--	-------------------

	<u>Page</u>
4.7 Selective Level Testing	19
4.7.1 Parameter Drift Values	19
4.7.2 Conditions for Burn-in	19
4.8 Environmental and Endurance Tests	23
4.8.1 Electrical Measurements on Completion of Environmental Tests	23
4.8.2 Electrical Measurements at Intermediate Points during Endurance Tests	23
4.8.3 Electrical Measurements on Completion of Endurance Tests	23
4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)	23

TABLES

1(a) Range of Components	6
1(b) Maximum Ratings	10
2 Electrical Measurements at Room Temperature	20
3 Electrical Measurements at High and Low Temperatures	20
4 Parameter Drift Values	22
5 Conditions for Burn-in	22
6 Electrical Measurements on Completion of Environmental Tests and at Intermediate Points and on Completion of Endurance Testing	24

FIGURES

1 Parameter Derating Information	11
2 Physical Dimensions	12
3 Functional Diagram	13
4 Test Circuit for Voltage Proof	21

APPENDICES (Applicable to specific Manufacturers only)

None.

**SCC**

ESA/SCC Detail Specification

No. 3006/001

PAGE 5

ISSUE 3

1. GENERAL**1.1 SCOPE**

This specification details the ratings, physical and electrical characteristics, test and inspection data for Capacitors, Fixed, Metallised Plastic Film Dielectric, based on Types CRH01 to CHR05.

It shall be read in conjunction with ESA/SCC Generic Specification No. 3006, the requirements of which are supplemented herein.

1.2 RANGE OF COMPONENTS

The range of capacitors covered by this specification is scheduled in Table 1(a).

1.3 MAXIMUM RATINGS

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the capacitors specified herein, are scheduled in Table 1(b).

1.4 PARAMETER DERATING INFORMATION

Rated voltage versus temperature derating is shown in Figure 1.

1.5 PHYSICAL DIMENSIONS

The physical dimensions of the capacitors specified herein are shown in Figure 2.

1.6 FUNCTIONAL DIAGRAM

The functional diagram for the capacitors specified herein is shown in Figure 3.



TABLE 1(a) - RANGE OF COMPONENTS

Item No.	Capacitance Range (µF)	Rated Voltage		Dimensions (mm)					Mean Weight (g)
		(Vdc)	(Vrms)	Length (L)		Length (G)	Diameter (D)		
				Min.	Max.	Max.	Min.	Max.	
01	0.001 to 0.0068	50	36.0	11.94	13.46	17.78	4.32	4.83	1.0
02	0.0082 to 0.015	50	36.0	13.51	15.03	19.35	4.32	4.83	1.2
03	0.018 to 0.033	50	36.0	13.51	15.03	19.35	4.90	5.41	1.3
04	0.039 to 0.05	50	36.0	16.69	18.21	19.35	4.32	4.83	1.3
05	0.0056 to 0.068	50	36.0	16.69	18.21	22.53	4.90	5.41	1.3
06	0.082 and 0.1	50	36.0	19.89	21.41	22.53	4.90	5.41	1.4
07	0.12 and 0.15	50	36.0	16.69	18.21	25.73	5.97	6.48	1.6
08	0.18 to 0.22	50	36.0	19.89	21.41	25.73	5.97	6.48	1.8
09	0.27 and 0.33	50	36.0	16.69	18.21	22.53	7.92	8.43	2.5
10	0.39 to 0.50	50	36.0	19.89	21.41	25.73	7.92	8.43	2.7
11	0.56 and 0.68	50	36.0	19.89	21.41	25.73	10.16	10.67	4.0
12	0.82 to 1.8	50	36.0	26.24	27.76	32.08	10.16	10.67	4.0
13	2.0 and 2.2	50	36.0	27.82	29.34	33.66	12.70	13.21	8.0
14	2.7 to 3.3	50	36.0	34.17	35.69	40.01	12.70	13.21	9.0
15	3.9	50	36.0	34.17	35.69	40.01	14.27	14.78	13.0
16	4.7	50	31.0	34.17	35.69	40.01	17.02	17.53	18.0
17	5.0	50	29.0	34.17	35.69	40.01	17.02	17.53	18.0
18	5.6	50	26.0	34.17	35.69	40.01	17.02	17.53	18.0
19	6.8	50	21.2	46.87	48.39	40.01	17.02	17.53	21.5
20	8.0	50	18.0	46.87	48.39	52.71	17.02	17.53	21.5
21	8.2	50	17.6	46.87	48.39	52.71	17.02	17.53	21.5
22	10.0	50	14.4	46.87	48.39	52.71	17.02	17.53	21.5
23	0.001 to 0.0056	100	60.0	11.94	13.46	17.78	4.32	4.83	1.0
24	0.0068 and 0.0082	100	60.0	13.51	15.03	19.35	4.32	4.83	1.2
25	0.01 to 0.015	100	60.0	16.69	18.21	22.53	4.32	4.83	1.3
26	0.018 to 0.033	100	60.0	16.69	18.21	22.53	4.90	5.41	1.3
27	0.039 to 0.056	100	60.0	16.69	18.21	22.53	5.97	6.48	1.6
28	0.068	100	60.0	19.89	21.41	25.73	5.97	6.48	1.8
29	0.082 to 0.12	100	60.0	16.69	18.21	22.53	5.97	6.48	2.5



TABLE 1(a) - RANGE OF COMPONENTS (CONTINUED)

Item No.	Capacitance Range (μF)	Rated Voltage		Dimensions (mm)						Mean Weight (g)
		(Vdc)	(Vrms)	Length (L)		Length (G)	Diameter (D)			
				Min.	Max.	Max.	Min.	Max.		
30	0.15 to 0.22	100	60.0	19.89	21.41	25.73	7.92	8.43	2.7	
31	0.27 and 0.33	100	60.0	26.24	27.76	32.08	7.92	8.43	3.0	
32	0.39 to 0.56	100	60.0	26.24	27.76	32.08	10.16	10.67	4.0	
33	0.68 and 0.82	100	60.0	27.82	29.34	33.66	12.70	13.21	8.0	
34	1.00 and 1.20	100	60.0	27.82	29.34	33.66	14.72	15.23	11.5	
35	1.50	100	60.0	34.17	35.69	40.01	14.72	15.23	13.0	
36	2.0 and 2.2	100	60.0	34.17	35.69	40.01	17.02	17.53	18.0	
37	2.7 and 3.0	100	60.0	46.87	48.39	52.71	17.02	17.53	21.5	
38	3.3	100	55.0	46.87	48.39	52.71	17.02	17.53	21.5	
39	3.9	100	49.0	46.87	48.39	52.71	19.05	19.56	28.0	
40	4.7	100	43.0	46.87	48.39	52.71	19.05	19.56	28.0	
41	5.0	100	40.0	46.87	48.39	52.71	19.05	19.56	28.0	
42	5.6	100	36.0	46.87	48.39	52.71	19.05	19.56	28.0	
43	6.8	100	29.0	59.57	61.09	65.41	25.40	25.91	56.0	
44	8.0	100	25.0	59.57	61.09	65.41	25.40	25.91	56.0	
45	8.2	100	24.0	59.57	61.09	65.41	25.40	25.91	56.0	
46	10.0	100	20.0	59.57	61.09	65.41	25.40	25.91	56.0	
47	0.001 to 0.0068	200	120.0	13.51	15.03	19.35	4.32	4.83	1.2	
48	0.0082 to 0.012	200	120.0	13.51	15.03	19.35	4.90	5.41	1.3	
49	0.015	200	120.0	13.51	15.03	19.35	5.97	6.48	1.4	
50	0.018 to 0.022	200	120.0	16.69	18.21	22.53	5.97	6.48	1.6	
51	0.027 to 0.050	200	120.0	16.69	18.21	22.53	7.92	8.43	2.5	
52	0.056 to 0.12	200	120.0	19.89	21.41	25.73	7.92	8.43	2.7	
53	0.15	200	120.0	26.24	27.76	32.08	10.16	10.67	4.0	
54	0.18 to 0.22	200	120.0	34.17	35.69	40.01	10.16	10.67	6.0	
55	0.27 to 0.56	200	120.0	34.17	35.69	40.01	12.70	13.21	9.0	
56	0.68	200	120.0	34.17	35.69	40.01	14.27	14.78	13.0	
57	0.82 to 1.2	200	120.0	46.87	48.39	52.71	14.27	14.78	17.2	
58	1.5	200	120.0	46.87	48.39	52.71	17.02	17.53	21.5	



TABLE 1(a) - RANGE OF COMPONENTS (CONTINUED)

Item No.	Capacitance Range (μF)	Rated Voltage		Dimensions (mm)					Mean Weight (g)
		(Vdc)	(Vrms)	Length (L)		Length (G)	Diameter (D)		
				Min.	Max.	Max.	Min.	Max.	
59	1.8	200	110.0	46.87	48.39	52.71	19.05	19.56	28.0
60	2.0	200	100.0	46.87	48.39	52.71	19.05	19.56	28.0
61	2.2	200	90.5	46.87	48.39	52.71	19.05	19.56	28.0
62	2.5	200	80.0	46.87	48.39	52.71	19.05	19.56	28.0
63	2.7	200	77.0	46.87	48.39	52.71	19.05	19.56	28.0
64	3.0	200	70.0	46.87	48.39	52.71	25.40	25.91	45.5
65	3.3	200	65.0	46.87	48.39	52.71	25.40	25.91	45.5
66	3.9	200	55.0	59.56	61.09	65.41	25.40	25.91	56.0
67	0.001 to 0.0022	400	240.0	13.51	15.03	19.35	4.90	5.41	1.3
68	0.0027 to 0.0056	400	240.0	13.51	15.03	19.35	5.97	6.48	1.4
69	0.0068 to 0.012	400	240.0	16.69	18.21	22.53	5.97	6.48	1.6
70	0.015	400	240.0	19.89	21.41	25.73	5.97	6.48	1.8
71	0.018 to 0.039	400	240.0	19.89	21.41	25.73	7.92	8.43	2.7
72	0.047 to 0.068	400	240.0	19.89	21.41	25.73	10.16	10.67	4.0
73	0.082 to 0.12	400	240.0	26.24	27.76	32.08	10.16	10.67	4.0
74	0.15	400	240.0	34.17	35.69	40.01	10.16	10.67	6.0
75	0.18 to 0.22	400	240.0	34.17	35.69	40.01	12.70	13.21	9.0
76	0.27 and 0.33	400	240.0	34.17	35.69	40.01	14.27	14.78	13.0
77	0.39 to 0.56	400	240.0	46.87	48.39	52.71	14.27	14.78	17.2
78	0.68	400	240.0	46.87	48.39	52.71	19.05	19.56	28.0
79	0.82	400	234.0	46.37	48.39	52.71	19.05	19.56	28.0
80	1.0	400	208.0	46.87	48.39	52.71	19.05	19.56	28.0
81	1.2	400	183.0	46.87	48.39	52.71	25.40	25.91	45.5
82	1.5	400	160.0	59.57	61.09	65.41	25.40	25.91	56.0
83	1.8	400	150.0	59.57	61.09	65.41	25.40	25.91	56.0
84	2.0	400	140.0	59.57	61.09	65.41	25.40	25.91	56.0

**TABLE 1(a) - RANGE OF COMPONENTS (CONTINUED)**

Item No.	Capacitance Range (µF)	Rated Voltage		Dimensions (mm)						Mean Weight (g)
		(Vdc)	(Vrms)	Length (L)		Length (G)	Diameter (D)			
				Min.	Max.	Max.	Min.	Max.		
85	0.001 to 0.022	30	22.0	11.94	13.46	17.78	4.32	4.83	1.0	
86	0.027 to 0.056	30	22.0	13.51	15.03	19.35	4.32	4.83	1.2	
87	0.068 and 0.082	30	22.0	16.69	18.21	22.53	4.32	4.83	1.3	
88	0.1 and 0.12	30	22.0	16.69	18.21	22.53	4.90	5.41	1.3	
89	0.15	30	22.0	13.51	15.03	19.35	5.97	6.48	1.4	
90	0.18 to 0.39	30	22.0	16.69	18.21	22.53	5.97	6.48	1.6	
91	0.47 to 0.68	30	22.0	16.69	18.21	22.53	7.92	8.43	2.5	
92	0.82 to 1.2	30	22.0	19.89	21.41	25.73	7.92	8.43	2.7	
93	1.5 to 2.2	30	22.0	19.89	21.41	25.73	10.16	10.67	4.0	
94	2.7 to 3.3	30	22.0	26.24	27.76	32.08	10.16	10.67	4.0	
95	3.9	30	22.0	34.17	35.69	40.01	10.16	10.67	6.0	
96	4.7	30	18.7	34.17	35.69	40.01	12.70	13.21	9.0	
97	5.0	30	17.6	34.17	35.69	40.01	12.70	13.21	9.0	
98	5.6	30	15.6	34.17	35.69	40.01	12.70	13.21	9.0	
99	6.8	30	13.0	34.17	35.69	40.01	14.27	14.78	13.0	
100	8.0	30	11.0	34.17	35.69	40.01	14.27	14.78	13.0	
101	8.2	30	10.7	34.17	35.69	40.01	14.27	14.78	13.0	
102	10.0	30	8.8	34.17	35.69	40.01	14.27	14.78	13.0	
103	12.0	30	7.3	46.87	48.39	52.71	14.27	14.78	17.2	
104	15.0	30	5.9	46.87	48.39	52.71	14.27	14.78	17.2	
105	20.0	30	4.4	46.87	48.39	52.71	17.02	17.53	21.5	
106	22.0	30	4.0	46.87	48.39	52.71	17.02	17.53	21.5	

NOTES

1. Wire diameters (Ø) shall be as follows:

- For $D < 7.92\text{mm}$: 0.54mm (min.) and 0.66mm (max.).
- For $7.92\text{mm} \leq D < 14.27\text{mm}$: 0.72mm (min.) and 0.88mm (max.).
- For $D \geq 14.27\text{mm}$: 0.90mm (min.) and 1.10mm (max.).

**TABLE 1(b) - MAXIMUM RATINGS**

No.	Characteristics	Item No.	Symbol	Maximum Ratings	Unit	Remarks
1	Rated Voltage d.c.	All	U_R	See Table 1(a)	Vdc	
2	Rated Voltage a.c.	All	U_A	See Table 1(a)	Vrms	Note 1
3	Operating Temperature Range	All	T_{amb}	- 55 to + 125	°C	
4	Storage Temperature Range	All	T_{stg}	- 55 to + 125	°C	
5	Maximum Soldering Temperature	All	T_{sol}	260	°C	Note 2

NOTES

1. All frequencies to 4.0kHz without derating.
2. Soldering time: $T_{sol} \leq 5.0$ seconds at 6.0mm from the body.



FIGURE 1 - PARAMETER DERATING INFORMATION


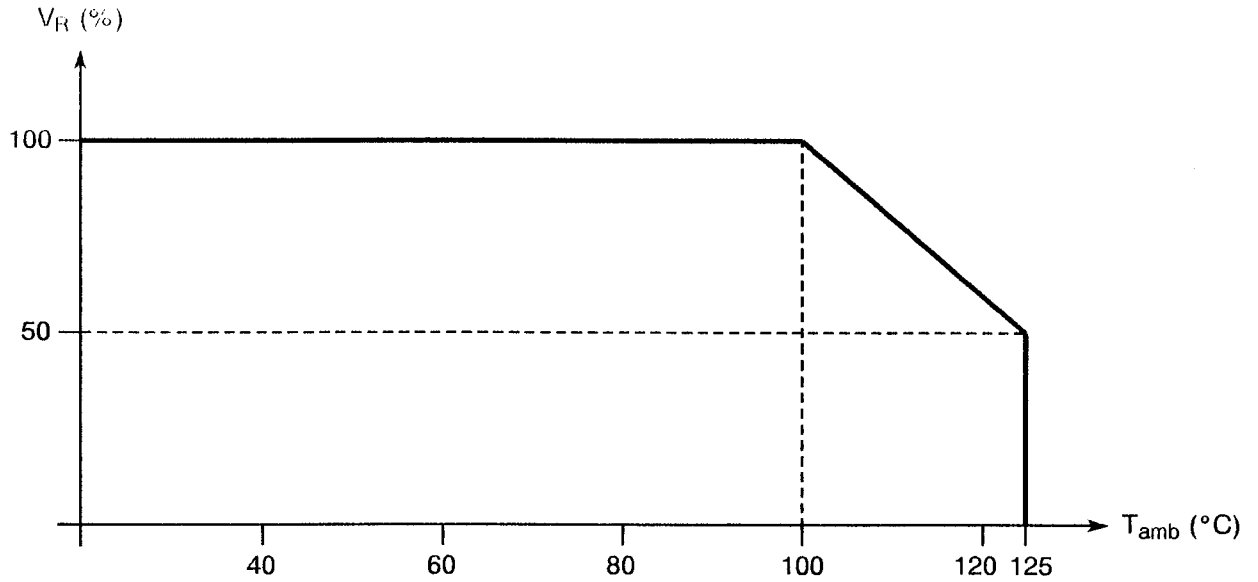





FIGURE 2 - PHYSICAL DIMENSIONS



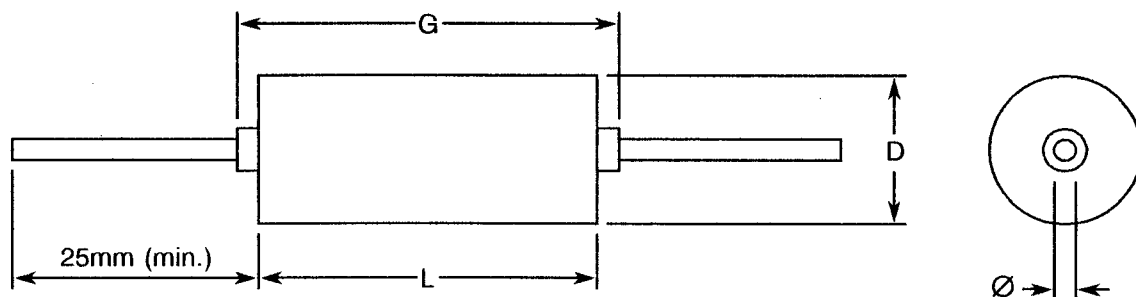

NOTES

1. See Table 1(a) for Dimensions.
2. L and D are bare case Dimensions.
3. Insulating sleeve thickness shall not exceed 0.13mm.

FIGURE 3 - FUNCTIONAL DIAGRAM



 	ESA/SCC Detail Specification No. 3006/001	PAGE 14 ISSUE 3
---	--	--------------------

2. APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it:-

- (a) ESA/SCC Generic Specification No. 3006 for Capacitors, Fixed, Metallised Plastic Dielectric, Hermetically Sealed in Metal Cases.
- (b) MIL-STD-1276, Leads, Weldable for Electronic Component Parts.

3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic Specification No. 21300 shall apply.

4. REQUIREMENTS

4.1 GENERAL

The complete requirements for procurement of the capacitors specified herein are stated in this specification and ESA/SCC Generic Specification No. 3006 for Capacitors, Fixed, Metallised Plastic Dielectric, Hermetically Sealed in Metal Cases. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESA/SCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Special In-process Controls

None.

4.2.2 Deviations from Final Production Tests (Chart II)

None.

4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)

None.



4.2.4 Deviations from Qualification Tests (Chart IV)

None.

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

None.

4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the capacitors specified herein shall be checked. They shall conform to those shown in Figure 2 and Table 1(a).

4.3.2 Weight

The maximum weight of the capacitors specified herein shall be 1.2 times the mean weight specified in Table 1(a).

4.3.3 Robustness of Terminations

The requirements for robustness of terminations are specified in Section 9 of ESA/SCC Generic Specification No. 3006. The test conditions shall be as follows:-

(a) For Item Nos. 01 to 08, 23 to 28, 47 to 50, 67 to 70 and 85 to 90 inclusive

Applied Force: 10 Newtons

(b) For All Other Item Numbers

Applied Force: 20 Newtons

The force shall be applied gradually to the terminal and then maintained for a period of 5 to 10 seconds. After this test, the capacitors shall be examined for evidence of breaking and loosening of terminals.

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the capacitors specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.



4.4.1 Case

The case material shall be non-magnetic metal and hermetically sealed, and covered with an insulating sleeve.

4.4.2 Leads

The capacitors with a diameter above 14.27mm shall be equipped with tinned copper leads according to Type 'C' of MIL-STD-1276. Those having a diameter less than 14.27mm shall be equipped with tinned copper clad steel leads according to Type 'W' of MIL-STD-1276. The leads shall be free from non-conductive and foreign materials beyond the maximum specified "clean lead to clean lead" body dimension. At any cross-section, the maximum thickness of the sheath shall not exceed twice the minimum thickness of the sheath.

4.5 MARKING

4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESA/SCC Basic Specification No. 21700 and the following paragraphs:-

- (a) The SCC Component Number.
- (b) Electrical Characteristics and Ratings.
- (c) Traceability information.

4.5.2 The SCC Component Number

The SCC Component Number shall be constituted and marked as follows:-


Detail Specification Number _____ 300600101B
Testing Level (B or C, as appropriate) _____

4.5.3 Electrical Characteristics and Ratings

The electrical characteristics and ratings to be marked in the following order of precedence are:-

- (a) Numerical Value.
- (b) Tolerance.
- (c) Rated Voltage.

The information shall be constituted and marked as follows:-

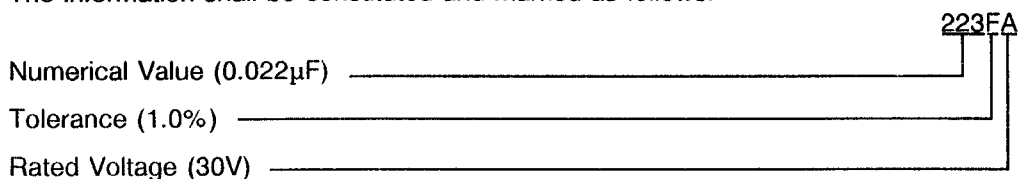

4.5.3.1 Numerical Values

Numerical values shall be coded as follows. The unit quantity for marking shall be picofarads.

Numerical Value	Code
X.X	XCX
XX	XX0
XX10 ¹	XX1
XX10 ²	XX2
XX10 ³	XX3
XX10 ⁴	XX4
XX10 ⁵	XX5
XX10 ⁶	XX6
XX10 ⁷	XX7

4.5.3.2 Tolerance

The tolerance on numerical values shall be indicated by the letter code specified hereafter.

Tolerance (%)	Code Letter
± 1.0	F
± 2.0	G



4.5.3.3 Rated Voltage

The rated voltage shall be indicated by the code letters specified hereafter.

Rated Voltage (V)	Code Letter
30	A
50	C
100	E
200	G
400	K

4.5.4 Traceability Information

Traceability information shall be marked in accordance with the requirements of ESA/SCC Basic Specification No. 21700.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured at room temperature are scheduled in Table 2. The measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.6.2 Electrical Measurements at High and Low Temperatures

The parameters to be measured at high and low temperatures are scheduled in Table 3. The AQL shall be 2.5% for each capacitance value. Each capacitance value shall be considered as constituting a complete lot. For qualification or lot acceptance testing, the sample size shall be as specified in ESA/SCC Generic Specification No. 3006.

4.6.3 Circuits for Electrical Measurements

The circuit for use in performing the electrical measurements listed in Tables 2 and 3 of this specification is shown in Figure 4.



4.7 SELECTIVE LEVEL TESTING

4.7.1 Parameter Drift Values

The parameter drift values applicable to burn-in are specified in Table 4 of this specification. Unless otherwise stated, measurements shall be performed at $T_{amb} = +22 \pm 3$ °C. The parameter drift values (Δ) applicable to the parameters scheduled shall not be exceeded. In addition to these drift value requirements for a given parameter, the appropriate limit value specified in Table 2 shall not be exceeded.

4.7.2 Conditions for Burn-in

The requirements for burn-in are specified in Section 7 of ESA/SCC Generic Specification No. 3006. The conditions for burn-in shall be as specified in Table 5 of this specification. On completion of burn-in, a recovery period of 24 ± 2 hours is necessary before the end-measurements.

**TABLE 2 - ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE**

No.	Characteristics	Symbol	Specification	Test Condition	Limits		Unit
					Min.	Max.	
1	Voltage Proof (Between Terminals)	U_{proof1}	ESA/SCC 3006	Para. 9.6.1.1	$1.6U_R$	-	V
2	Voltage Proof (Terminal-to-Case)	U_{proof2}	ESA/SCC 3006	Para. 9.6.1.1 (Note 4)	$2.0U_R$	-	V
3	Insulation Resistance (Between Terminals)	$R_{i(1)}$	ESA/SCC 3006	Para. 9.6.1.4 (Note 1)	50	-	$G\Omega$
4	Insulation Resistance (Terminal-to-Case)	$R_{i(2)}$	ESA/SCC 3006	Para. 9.6.1.4	50	-	$G\Omega$
5	Capacitance	C	ESA/SCC 3006	Para. 9.6.1.2	C_n -1.0 -2.0	C_n +1.0 +2.0	(5)%
6	Tangent of Loss Angle	$tg\delta$	ESA/SCC 3006	Para. 9.6.1.3 (Note 3)	-	0.15	%

TABLE 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES


No.	Characteristics	Symbol	Specification	Test Condition	Limits		Unit
					Min.	Max.	
1	Insulation Resistance at $+125 \pm 3^\circ C$ (Between Terminals)	$R_{i(1)}$	ESA/SCC 3006	Para. 9.6.1.4 (Note 2)	0.5	-	$G\Omega$
2	Capacitance Change at $-55 \pm 3^\circ C$	$\frac{\Delta C}{C}$	ESA/SCC 3006	Para. 9.6.1.2	-2.5	-0.5	%
3	Capacitance Change at $+125 \pm 3^\circ C$	$\frac{\Delta C}{C}$	ESA/SCC 3006	Para. 9.6.1.2	-1.0	-1.2	%

NOTES

1. $RC \geq 10^4$ seconds for $C > 0.22\mu F$.
2. $RC \geq 10^2$ seconds for $C > 0.22\mu F$.
3. For values less than or equal to $1.0\mu F$, measure at 1.0kHz.
For values greater than $1.0\mu F$, measure at 0.1kHz.
4. With a minimum of 200V.
5. Depends on tolerance code (see Para. 4.5.3.2): $F = \pm 10\%$ and $G = \pm 2.0\%$.



FIGURE 4 - TEST CIRCUIT FOR VOLTAGE PROOF

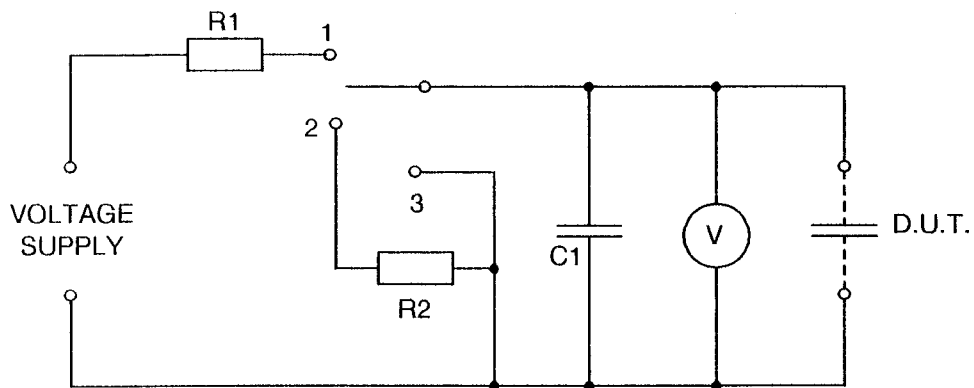

NOTES

1. The resistance of the Voltmeter shall be not less than $10\,000\Omega/V$. The capacitance of C shall be at least 10 times that of D.U.T.
2. The resistances of R1 and R2 shall be such that the initial charging and discharging current does not exceed 0.05A at the highest test voltage.

TABLE 4 - PARAMETER DRIFT VALUES

No.	Characteristics	Symbol	Spec. and/or Test Method	Test Conditions	Change Limits (Δ)	Unit
1	Capacitance Change	$\frac{\Delta C}{C}$	As per Table 2	As per Table 2	± 0.25	%
2	Tangent of Loss Angle	$tg\delta$	As per Table 2	As per Table 2	Note 1	%

NOTES

- For values less than or equal to 1.0 μ F, measure at 1.0kHz. For values greater than 1.0 μ F, measure at 0.1kHz. The measured value shall not exceed 0.15%.

TABLE 5 - CONDITIONS FOR BURN-IN

No.	Characteristic	Symbol	Condition	Unit
1	Ambient Temperature	T_{amb}	+ 125	$^{\circ}$ C
2	Test Voltage	U_T	1.4 U_R of derated voltage	V



4.8 ENVIRONMENTAL AND ENDURANCE TESTS

4.8.1 Electrical Measurements on Completion of Environmental Tests

The parameters to be measured on completion of environmental tests are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.8.2 Electrical Measurements at Intermediate Points during Endurance Tests

The parameters to be measured at intermediate points during endurance tests are scheduled in Table 6.

4.8.3 Electrical Measurements on Completion of Endurance Tests

The parameters to be measured on completion of endurance testing are scheduled in Table 6. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)

The requirements for operating life testing are specified in Section 9 of ESA/SCC Generic Specification No. 3006. The conditions for operating life testing shall be as specified in Table 5 of this specification.



TABLE 6 - ELECTRICAL MEASUREMENTS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING

ESA/SCC 3006 Paragraph	Characteristic	Symbol	Measurement	Condition ESA/SCC 3006 Paragraph	Limits		Unit
					Min.	Max.	
9.8	Damp Heat Steady State (Duration: 56 Days)	U_T	Voltage Proof	9.6.1.1	$1.0 U_R$	-	V
		$\frac{\Delta C}{C}$	Capacitance Change	9.6.1.2	-0.25	+0.25	%
		$tg\delta$	Tangent of Loss Angle	9.6.1.3	-	+0.15	%
		$R_i (1)$	Insulation Resistance (between terminals)	9.6.1.4	50% of Table 2	-	$G\Omega$
		$R_i (2)$	Insulation Resistance (terminal-to-case)	9.6.1.4	5.0	-	$G\Omega$
9.9	Robustness of Terminations			External Visual Inspection			
9.10	Resistance to Soldering Heat	$\frac{\Delta C}{C}$	Capacitance Change	9.6.1.2	-0.25	+0.25	%
9.11	Solderability		External Visual Inspection	Solder Globule Method			
9.3	Rapid Change in Temperature	$\frac{\Delta C}{C}$	Capacitance Change	9.6.1.2	-0.5	+0.5	%
		$tg\delta$	Tangent of Loss Angle	9.6.1.3	-	10	10^{-4}
9.12	Vibration			External Visual Inspection			
9.13.1	Bump	$\frac{\Delta C}{C}$	Capacitance Change	9.6.1.2	-0.5	+0.5	%
9.13.2	Shock	$\frac{\Delta C}{C}$	Capacitance Change	9.6.1.2	-0.5	+0.5	%
9.14	Climatic Sequence	$\frac{\Delta C}{C}$	Capacitance Change	9.6.1.2	-0.25	+0.25	%
		$tg\delta$	Tangent of Loss Angle	9.6.1.3	-	+0.15	
		$R_i (1)$	Insulation Resistance (between terminals)	9.6.1.4	50% of Table 2	-	$G\Omega$
		$R_i (2)$	Insulation Resistance (terminal-to-case)	9.6.1.4	5.0	-	$G\Omega$

**TABLE 6 - ELECTRICAL MEASUREMENTS ON COMPLETION OF ENVIRONMENTAL TESTS AND AT INTERMEDIATE POINTS AND ON COMPLETION OF ENDURANCE TESTING (CONT'D)**

ESA/SCC 3006 Paragraph	Characteristic	Symbol	Measurement	Condition ESA/SCC 3006 Paragraph	Limits		Unit
					Min.	Max.	
9.15	High and Low Temperature Stability	$\frac{\Delta C}{C}$	Capacitance Change	9.15	-2.0	+2.0	%
9.16	Operating Life	$\frac{\Delta C}{C}$	Capacitance Change	9.6.1.2	-2.0	+2.0	%
		tg δ	Tangent of Loss Angle	9.6.1.3	-	+0.25	%
		R _{i (1)}	Insulation Resistance (between terminals)	9.6.1.4	33.3% of Table 2 Values	-	G Ω
		R _{i (2)}	Insulation Resistance (terminal-to-case)	9.6.1.4	5.0	-	G Ω