



**PTFE INSULATED WIRES AND CABLES,
LOW FREQUENCY, 600V, -100 TO +200°C**

ESCC Detail Specification No. 3901/013

Issue 3	June 2013
---------	-----------



LEGAL DISCLAIMER AND COPYRIGHT

European Space Agency, Copyright © 2013, All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without prior permission of the European Space Agency and provided it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

DOCUMENTATION CHANGE NOTICE

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
795	Specification upissued to incorporate editorial changes per DCR.

TABLE OF CONTENTS

1	GENERAL	6
1.1	SCOPE	6
1.2	TYPE VARIANTS	6
1.3	MAXIMUM RATINGS	6
1.4	PARAMETER DERATING INFORMATION	6
1.5	PHYSICAL CHARACTERISTICS	6
1.6	FUNCTIONAL DIAGRAM	6
2	APPLICABLE DOCUMENTS	13
3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	13
4	REQUIREMENTS	13
4.1	GENERAL	13
4.2	DEVIATIONS FROM GENERIC SPECIFICATION	13
4.2.1	Deviations from Special In-process Controls	13
4.2.2	Deviations from Final Production Tests (Chart II)	13
4.2.3	Deviations from Burn-in and Electrical Measurements (Chart III)	13
4.2.4	Deviations from Qualification Tests (Chart IV)	13
4.2.5	Deviations from Lot Acceptance Tests (Chart V)	13
4.3	MECHANICAL REQUIREMENTS	14
4.3.1	Dimension Check	14
4.3.2	Weight	14
4.4	MATERIALS AND FINISHES	15
4.4.1	Conductor	15
4.4.2	Insulation	15
4.4.3	Shield	16
4.4.4	Jacket	16
4.5	MARKING	17
4.5.1	General	17
4.5.2	The ESCC Component Number	17
4.5.3	Characteristics	17
4.5.4	Traceability Information	17
4.5.5	Additional Marking	17
4.6	ELECTRICAL MEASUREMENTS	17
4.6.1	Electrical Measurements at Room Temperature	17
4.6.2	Electrical Measurements at High and Low Temperatures	17
4.6.3	Circuits for Electrical Measurements	17

4.7	BURN-IN TESTS	18
4.8	ENVIRONMENTAL AND ENDURANCE TESTS	18
4.8.1	Mechanical Properties of Conductor	18
4.8.2	Accelerated Ageing	18
4.8.3	Wrap Test at Ambient Temperature	19
4.8.4	Voltage Test	19
4.8.5	Shrinkage	19
4.8.6	Blocking	19
4.8.7	Cold Bend Test	20
4.8.8	Cut-through Resistance	20
4.8.9	Notch Resistance	20
4.8.10	Flammability	20
4.8.11	Resistance to Fluids	20
4.8.12	Surface Resistance	20
4.8.13	Abrasion Resistance	20
4.8.14	Soldering	20
4.8.15	Solderability	20
4.8.16	Radiation Resistance	20
4.8.17	Overload Resistance	20
4.8.18	Long-term Ageing Test	21
4.8.19	Anthony and Brown Test	21

1 GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics, test and inspection data for PTFE Insulated Wires and Cables, Low Frequency, 600V, -100 to +200 °C. It shall be read in conjunction with ESCC Generic Specification No. 3901, the requirements of which are supplemented herein.

NOTES:

1. Only simple elements (finished wires and unshielded, jacketed multicore cables) can be used in the presence of hydrazine or nitrogen tetroxide.

1.2 TYPE VARIANTS

Variants of the basic types of wires and cables specified herein, which are also covered by this specification, are listed in Table 1(a).

1.3 MAXIMUM RATINGS

The maximum ratings, applicable to the finished wires and cables specified herein, which shall not be exceeded at any time during use or storage in controlled space environment, are scheduled in Table 1(b).

1.4 PARAMETER DERATING INFORMATION

The derating information applicable to the finished wires and cables specified herein is as follows:

- The maximum current for each wire used in a bundle shall be:

$$I_{Bmax} = I_{max} \times \frac{29 - n}{28} \quad (\text{for } 1 < n < 15)$$
$$I_{Bmax} = \frac{I_{max}}{2} \quad (\text{for } n > 15)$$

where n = number of wires in the bundle.

- The temperature derating information is shown in Figure 1 with maximum current I_{max} for a single wire.
- The derating factors contained herein indicate maximum stress values and do not preclude further derating.

1.5 PHYSICAL CHARACTERISTICS

The physical characteristics of the finished wires and cables specified herein are shown in Figures 2(a), 2(b) and 2(c) and their dimensions in Table 1(a).

1.6 FUNCTIONAL DIAGRAM

Not applicable.

TABLE 1(a) – TYPE VARIANTS

Variant No.	Shielded	Un-Shielded		No. of Cores	Wire Size AWG	Stranding No. of Strands × Diameter (mm)	Conductor Characteristics			Shield Strand Ø (mm)	Core Max Ø (mm)	Finished Wire Or Cable Characteristics	
		Jacketed	Un-Jacketed				Max Ø (mm)	Nom Section (mm ²)	Max Ohmic Resistance (Ω/km)			Max Ø (mm)	Max Weight (kg/km)
01			X	1	28	7×0.127 (1)	0.42	0.089	215	-	-	0.82	1.8
02			X	1	26	7×0.16 (1)	0.5	0.14	146	-	-	0.89	2.3
03			X	1	24	7×0.2	0.62	0.22	87.2	-	-	1.04	3.34
04			X	1	22	7×0.25	0.77	0.34	55.8	-	-	1.19	4.84
05			X	1	20	19×0.2	1.03	0.6	32.2	-	-	1.44	7.4
06			X	2	28	7×0.127 (1)	0.42	0.089	225	-	0.82	1.64	3.8
07			X	2	26	7×0.16 (1)	0.5	0.14	153	-	0.89	1.78	4.84
08			X	2	24	7×0.2	0.62	0.22	91.6	-	1.04	2.08	6.9
09			X	2	22	7×0.25	0.77	0.34	58.7	-	1.19	2.38	10
10			X	2	20	19×0.2	1.03	0.6	33.8	-	1.44	2.88	15.3
11			X	3	28	7×0.127 (1)	0.42	0.089	225	-	0.82	1.76	5.7
12			X	3	26	7×0.16 (1)	0.5	0.14	153	-	0.89	1.92	7.28
13			X	3	24	7×0.2	0.62	0.22	91.6	-	1.04	2.24	10.35
14			X	3	22	7×0.25	0.77	0.34	58.7	-	1.19	2.56	15
15			X	3	20	19×0.2	1.03	0.6	33.8	-	1.44	3.12	23
16			X	4	28	7×0.127 (1)	0.42	0.089	225	-	0.82	1.97	7.55
17			X	4	26	7×0.16 (1)	0.5	0.14	153	-	0.89	2.14	9.71
18			X	4	24	7×0.2	0.62	0.22	91.6	-	1.04	2.5	14
19			X	4	22	7×0.25	0.77	0.34	58.7	-	1.19	2.86	20.3
20			X	4	20	19×0.2	1.03	0.6	33.8	-	1.44	3.46	31.1
21		X		2	28	7×0.127 (1)	0.42	0.089	225	-	0.82	1.92	4.32
22		X		2	26	7×0.16 (1)	0.5	0.14	153	-	0.89	2.06	5.28
23		X		2	24	7×0.2	0.62	0.22	91.6	-	1.04	2.36	7.54



Variant No.	Shielded	Un-Shielded		No. of Cores	Wire Size AWG	Stranding No. of Strands x Diameter (mm)	Conductor Characteristics			Shield Strand Ø (mm)	Core Max Ø (mm)	Finished Wire Or Cable Characteristics	
		Jacketed	Un-Jacketed				Max Ø (mm)	Nom Section (mm ²)	Max Ohmic Resistance (Ω/km)			Max Ø (mm)	Max Weight (kg/km)
24		X		2	22	7x0.25	0.77	0.34	58.7	-	1.19	2.66	10.7
25		X		2	20	19x0.2	1.03	0.6	33.8	-	1.44	3.16	16.2
26		X		3	28	7x0.127 (1)	0.42	0.089	225	-	0.82	2.04	6.26
27		X		3	26	7x0.16 (1)	0.5	0.14	153	-	0.89	2.2	7.8
28		X		3	24	7x0.2	0.62	0.22	91.6	-	1.04	2.52	11
29		X		3	22	7x0.25	0.77	0.34	58.7	-	1.19	2.84	15.8
30		X		3	20	19x0.2	1.03	0.6	33.8	-	1.44	3.4	24
31		X		4	28	7x0.127 (1)	0.42	0.089	225	-	0.82	2.25	8.17
32		X		4	26	7x0.16 (1)	0.5	0.14	153	-	0.89	2.42	10.3
33		X		4	24	7x0.2	0.62	0.22	91.6	-	1.04	2.78	14.8
34		X		4	22	7x0.25	0.77	0.34	58.7	-	1.19	3.14	21.2
35		X		4	20	19x0.2	1.03	0.6	33.8	-	1.44	3.74	32.2
36	X			1	28	7x0.127 (1)	0.42	0.089	215	0.055	0.82	1.22	3.77
37	X			1	26	7x0.16 (1)	0.5	0.14	146	0.055	0.89	1.29	4.63
38	X			1	24	7x0.2	0.62	0.22	87.2	0.07	1.04	1.52	6.38
39	X			1	22	7x0.25	0.77	0.34	55.8	0.07	1.19	1.67	8.26
40	X			1	20	19x0.2	1.03	0.6	32.2	0.07	1.44	1.92	11.4
41	X			2	28	7x0.127 (1)	0.42	0.089	225	0.07	0.82	2.12	7.62
42	X			2	26	7x0.16 (1)	0.5	0.14	153	0.07	0.89	2.26	9.24
43	X			2	24	7x0.2	0.62	0.22	91.6	0.07	1.04	2.56	11.7
44	X			2	22	7x0.25	0.77	0.34	58.7	0.07	1.19	2.86	15.5
45	X			2	20	19x0.2	1.03	0.6	33.8	0.07	1.44	3.36	21.7
46	X			3	28	7x0.127 (1)	0.42	0.089	225	0.07	0.82	2.24	10.7
47	X			3	26	7x0.16 (1)	0.5	0.14	153	0.07	0.89	2.39	12.5



Variant No.	Shielded	Un-Shielded		No. of Cores	Wire Size AWG	Stranding No. of Strands x Diameter (mm)	Conductor Characteristics			Shield Strand Ø (mm)	Core Max Ø (mm)	Finished Wire Or Cable Characteristics	
		Jacketed	Un-Jacketed				Max Ø (mm)	Nom Section (mm ²)	Max Ohmic Resistance (Ω/km)			Max Ø (mm)	Max Weight (kg/km)
48	X			3	24	7x0.2	0.62	0.22	91.6	0.07	1.04	2.72	16
49	X			3	22	7x0.25	0.77	0.34	58.7	0.07	1.19	3.04	21.2
50	X			3	20	19x0.2	1.03	0.6	33.8	0.1	1.44	3.73	33.7
51	X			4	28	7x0.127 (1)	0.42	0.089	225	0.07	0.82	2.45	12.8
52	X			4	26	7x0.16 (1)	0.5	0.14	153	0.07	0.89	2.62	15.6
53	X			4	24	7x0.2	0.62	0.22	91.6	0.07	1.04	2.98	20.5
54	X			4	22	7x0.25	0.77	0.34	58.7	0.1	1.19	3.49	30.5
55	X			4	20	19x0.2	1.03	0.6	33.8	0.1	1.44	4.09	43.2
56			X	1	18	19x0.25	1.29	0.93	20.6	-	-	1.85	12
57			X	1	16	19x0.285	1.44	1.23	16.5	-	-	2.23	17
58			X	2	18	19x0.25	1.29	0.93	21.6	-	1.85	3.7	24.9
59			X	2	16	19x0.285	1.44	1.23	17.3	-	2.23	4.46	34.6
60			X	3	18	19x0.25	1.29	0.93	21.6	-	1.85	3.98	37.3
61			X	3	16	19x0.285	1.44	1.23	17.3	-	2.23	4.8	51.8
62			X	4	18	19x0.25	1.29	0.93	21.6	-	1.85	4.46	49.7
63			X	4	16	19x0.285	1.44	1.23	17.3	-	2.23	5.37	69.1
64		X		2	18	19x0.25	1.29	0.93	21.6	-	1.85	3.83	26
65		X		2	16	19x0.285	1.44	1.23	17.3	-	2.23	4.63	35.8
66		X		3	18	19x0.25	1.29	0.93	21.6	-	1.85	4.13	38.6
67		X		3	16	19x0.285	1.44	1.23	17.3	-	2.23	4.93	53.3
68		X		4	18	19x0.25	1.29	0.93	21.6	-	1.85	4.59	51.2
69		X		4	16	19x0.285	1.44	1.23	17.3	-	2.23	5.5	70.9
70	X			1	18	19x0.25	1.29	0.93	20.6	0.07	1.85	2.26	17
71	X			1	16	19x0.285	1.44	1.23	16.5	0.07	2.23	2.6	22.9



Variant No.	Shielded	Un-Shielded		No. of Cores	Wire Size AWG	Stranding No. of Strands x Diameter (mm)	Conductor Characteristics			Shield Strand Ø (mm)	Core Max Ø (mm)	Finished Wire Or Cable Characteristics	
		Jacketed	Un-Jacketed				Max Ø (mm)	Nom Section (mm ²)	Max Ohmic Resistance (Ω/km)			Max Ø (mm)	Max Weight (kg/km)
72	X			2	18	19x0.25	1.29	0.93	21.6	0.1	1.85	4.23	35.5
73	X			2	16	19x0.285	1.44	1.23	17.3	0.1	2.23	4.98	47.8
74	X			3	18	19x0.25	1.29	0.93	21.6	0.1	1.85	4.6	51
75	X			3	16	19x0.285	1.44	1.23	17.3	0.1	2.23	5.41	67.9
76	X			4	18	19x0.25	1.29	0.93	21.6	0.1	1.85	5.07	65.9
77	X			4	16	19x0.285	1.44	1.23	17.3	0.1	2.23	5.97	91.5
78			X	1	30	7x0.1 (1)	0.32	0.055	375	-	-	0.71	1.2

NOTES:

1. Copper alloy.


TABLE 1(b) – MAXIMUM RATINGS

No.	Characteristics	Symbol	Maximum Rating	Unit	Remarks
1	Voltage	V_P	600	V_{rms}	
2	Maximum Current (Note 1)	I_{max}	0.8 1.5 2.5 3.5 5 7.5 10 13	A	For AWG: 30 28 26 24 22 20 18 16
3	Operating Temperature Range	T_{amb}	-100 to +200	$^{\circ}C$	
4	Storage Temperature Range	T_{stg}	-100 to +200	$^{\circ}C$	

NOTES:

- The above specified current will generate a temperature rise of approximately 50 $^{\circ}C$ above ambient temperature in a vacuum environment. Precautions shall be taken to prevent the total temperature of the wire (ambient plus rise) exceeding the continuous operating temperature of the wire.

FIGURE 1 – PARAMETER DERATING INFORMATION

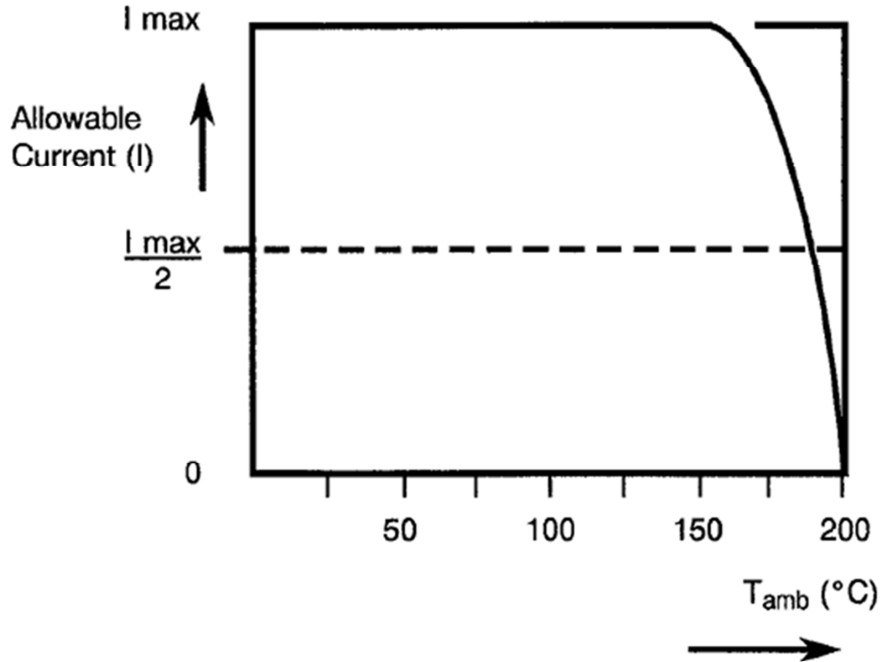

Allowable Current versus Temperature

FIGURE 2 – PHYSICAL CHARACTERISTICS

Dimensions are given in Table 1(a)

FIGURE 2(a) – FINISHED WIRES

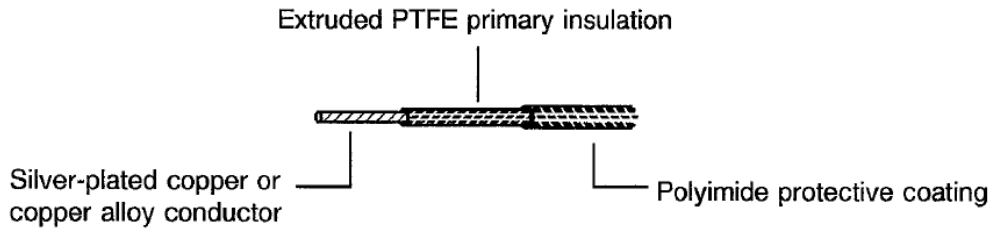


FIGURE 2(b) – UNSHIELDED MULTICORE CABLES

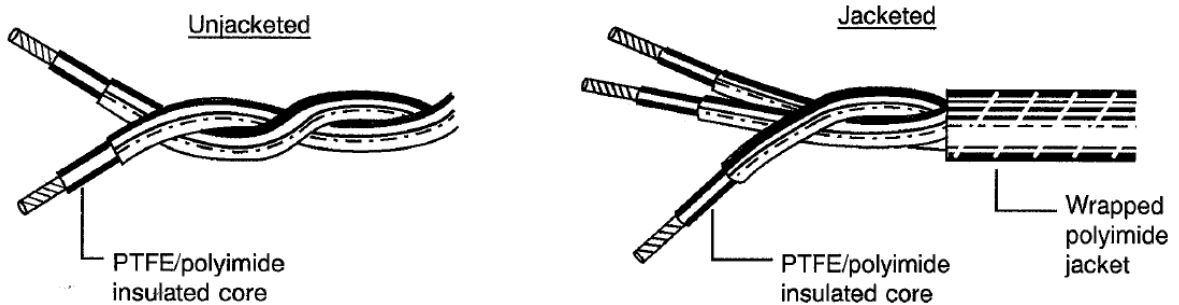


FIGURE 2(c) – SHIELDED AND JACKETED CABLES


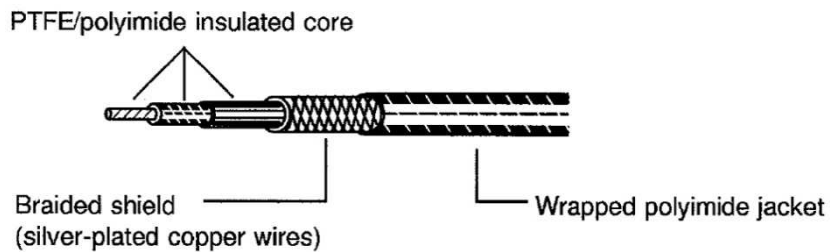


FIGURE 2(d) – SHIELDED AND JACKETED CABLES

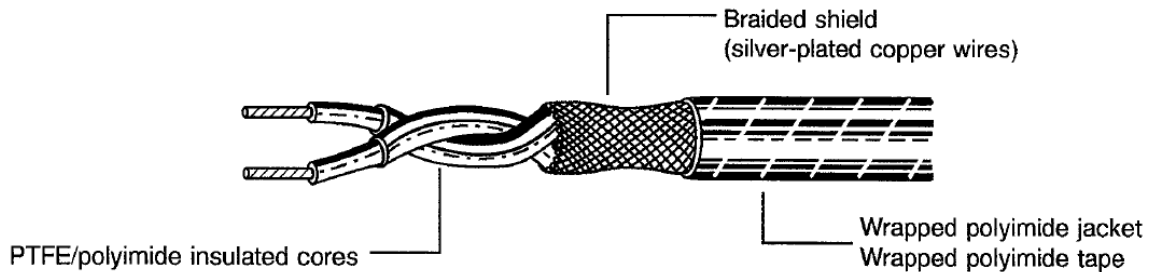

2 **APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. 3901, Wires and Cables, Electrical, 600V, Low Frequency.
- (b) MIL-W-81381, Wires, Electrical, Polyimide Insulated, Copper or Copper Alloy.

3 **TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS**

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 and ESCC Generic Specification No. 3901 shall apply.

4 **REQUIREMENTS**

4.1 **GENERAL**

The complete requirements for procurement of the finished wires and cables specified herein are stated in this specification and ESCC Generic Specification No. 3901. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirements and do not affect the components' reliability, are listed in the Appendices attached to this specification.

4.2 **DEVIATIONS FROM GENERIC SPECIFICATION**

4.2.1 **Deviations from Special In-process Controls**

None.

4.2.2 **Deviations from Final Production Tests (Chart II)**

None.

4.2.3 **Deviations from Burn-in and Electrical Measurements (Chart III)**

Not applicable.

4.2.4 **Deviations from Qualification Tests (Chart IV)**

- (a) Para. 9.21, Resistance to Fluids: To be modified as stated in Para. 4.8.11 of this specification.

4.2.5 **Deviations from Lot Acceptance Tests (Chart V)**

None.

4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the finished wires and cables specified herein shall be checked. They shall conform to those shown in Table 1(a), Figure 2 and Para 4.4 of this specification (see below for the list of parameters to be checked).

LIST OF PARAMETERS TO BE CHECKED

Parameter	Table 1(a)	Figure 2	Para. 4.4
<u>COMPOSITION</u>			
Number of conductors	X		
Gauge	X		
Shielding	X		
Jacket		X	
<u>CONDUCTOR</u>			
Nature			X
Outer diameter	X		
Number of strands	X		
Strand diameter	X		
Length of lay			X
Silver thickness			X
<u>INSULATION</u>			
Composition		X	X
Protective coating		X	X
Thickness			X
Outer diameter	X		
Concentricity			X
<u>SHIELDING</u>			
Number of strands	X		
Type of shielding			X
Strand diameter	X		
Nature		X	X
Silver thickness			X
Shielding lay			X
Braid angle			X
Shield coverage			X
<u>JACKET</u>			
Composition		X	X
Protective coating		X	X
Thickness			X
Overlapping			X
Outer diameter	X		

4.3.2 Weight

The maximum weight of the finished wires and cables specified herein shall be as specified in Table 1(a).

4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the wires and cables specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

4.4.1 Conductor

4.4.1.1 *Material Characteristics*

All strands used in the manufacture of the conductors shall be silver-coated, soft or annealed, oxygen-free high conductivity copper from AWG 16 to 24 inclusive and silver-coated, high strength copper alloy for AWG 26 to 30. On silver-coated strands, the thickness of silver shall be 2 microns minimum.

On all copper conductors, any strand shall show a 10% minimum elongation. On all high-strength copper alloy conductors, any strand shall show a 6% minimum elongation at break and a 350N/mm² minimum tensile strength.

The resistance of the conductors shall be determined at +20°C in accordance with Para 9.5 of ESCC Generic Specification No. 3901, where the α coefficient for copper alloy is 0.0035.

4.4.1.2 *Stranding*

The conductors shall be constructed of concentrically laid strands to produce a smooth and uniform conductor of circular cross-section and free from any high strands or other surface irregularities.

The length of the left-hand lay of the external layer shall not be less than 8, nor more than 16, times the maximum conductor diameter specified in Table 1(a).

4.4.2 Insulation

4.4.2.1 *Material*

Any insulating material shall be virgin polytetrafluoroethylene and polyimide with only those additives that are necessary for processing and pigmentation.

4.4.2.2 *Construction*

The insulation shall have a uniform cross-section throughout the length of the cable and the conductor shall be evenly centred in the insulation.

At any cross-section along the length of the completed wire, the minimum thickness of the insulation shall not be less than 41% of the difference between measured diameter over insulation and measured diameter over conductor, nor less than 70% of the maximum thickness at that cross-section. Measurements to determine concentricity shall be made of the primary insulation only and shall not include the thickness of outer coverings.

Nominal overall wall thickness: 0.2mm.

PTFE: 0.18mm.

Coating: 0.02mm.

4.4.3 Shield

4.4.3.1 *Material*

Shield strands shall meet the requirements for silver-coated, annealed copper as outlined in Para. 4.4.1.1 of this specification.

4.4.3.2 *Construction*

The shield shall be made of closely woven round strands and provide not less than 90% coverage, 'K' being calculated by the following formula:

$$K = (2F - F^2) \times 100,$$

where:

- K = % coverage.
- $F = \frac{n.d.P}{\sin a}$

and where:

- n = number of strands per carrier.
- d = diameter of strands (mm).
- P = picks per mm.
- a = angle of braid with cable axis in degrees: $\tan a = \frac{2\pi(D+2d)P}{C}$

where:

- D = effective diameter of cable under shield (mm).
- D = $(\pi+n) b/\pi$, where:
 - n = number of basic wires
 - b = basic wire diameter.
 - C = number of carriers.

4.4.4 Jacket

Wrapped sealed polyimide tape, type 0.1/1/0.1 according to MIL-W-81381:

- 1 layer minimum for jacketed unshielded cables.
- 2 layers minimum for shielded and jacketed cables.

4.5 MARKING

4.5.1 General

The marking of all spools of finished wires and cables delivered to this specification shall be in accordance with the requirements of ESCC Basic Specification No. 21700. Each spool shall be marked in respect of:

- (a) The ESCC Component Number.
- (b) Characteristics.
- (c) Traceability Information.
- (d) Additional Marking.

4.5.2 The ESCC Component Number

Each spool shall bear the ESCC Component Number which shall be constituted and marked as follows:

Example: 390101302B

- Detail Specification Number: 3901013
- Type Variant (see Table 1(a)): 02
- Testing Level (B is mandatory): B

4.5.3 Characteristics

The characteristics shall show the length(s) of finished wire or cable wound on each spool and the length shall be marked as follows:

Example: 100m

- Length in metres (see Note): 100
- Symbol for metres: m

NOTES:

1. Whenever the length is less than 100 metres, insert a zero in the first block (example: 075m). If more than one length of finished wire or cable is wound on a spool, the characteristics of each length shall be marked as above.

4.5.4 Traceability Information

Each spool shall be marked in respect of traceability information in accordance with the requirements of ESCC Basic Specification No. 21700.

4.5.5 Additional Marking

Each spool shall bear the cable manufacturer's Quality Control Inspector's stamp or initials.

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured at room temperature are scheduled in Table 2. The measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

4.6.2 Electrical Measurements at High and Low Temperatures

Not applicable.

4.6.3 Circuits for Electrical Measurements

Not applicable.

4.7 BURN-IN TESTS

Not applicable.

4.8 ENVIRONMENTAL AND ENDURANCE TESTS**4.8.1 Mechanical Properties of Conductor**

As detailed in Para. 4.4.1.1 of this Specification.

4.8.2 Accelerated Ageing

Ageing Temperature: +250±5 °C.

The mandrel diameter and appropriate weight used for accelerated age testing of the finished wires is given in Table A.

TABLE A – MANDREL DIAMETERS AND LOADS FOR FINISHED WIRES

Wire Size (AWG)	Mandrel Diameter (mm)	Weight (kg)
30	3	0.2
28	3	0.2
26	3	0.2
24	3	0.2
22	6	0.35
20	6	0.35
18	6	0.5
16	10	0.5

4.8.3 Wrap Test at Ambient Temperature

The mandrel diameters and applied loads for wrap testing of finished wires are given in Table A. The mandrel diameters and applied loads for screened and jacketed cables are given in Table B.

TABLE B – MANDREL DIAMETERS AND LOADS FOR SHIELDED AND JACKETED CABLES

Cable Size (AWG)	Number of Cores	Mandrel Diameter (mm)	Load (kg)
28	1	6	0.2
26	1	6	0.2
24	1	6	0.2
22	1	6	0.35
20	1	6	0.35
18	1	10	0.5
16	1	12	0.5
28	2	12	0.4
26	2	12	0.4
24	2	12	0.4
22	2	12	0.7
20	2	12	0.7
18	2	15	1
16	2	15	1
28	3	12	0.6
26	3	12	0.6
24	3	12	0.6
22	3	12	1
20	3	12	1
18	3	15	1.5
16	3	15	1.5
28	4	12	0.8
26	4	12	0.8
24	4	12	0.8
22	4	12	1.5
20	4	12	1.5
18	4	20	2
16	4	20	2

4.8.4 Voltage Test

No particular conditions are applicable.

4.8.5 Shrinkage

The shrinkage temperature shall be +260±5 °C.

4.8.6 Blocking

The blocking temperature shall be +260±5 °C.

4.8.7 Cold Bend Test

The mandrel diameters and loads shall be as specified in Table C.

TABLE C – MANDREL DIAMETERS AND LOADS FOR FINISHED WIRES OR CORES

Wire Size (AWG)	Mandrel Diameter (mm)	Weight (kg)
30	6	0.2
28	6	0.2
26	6	0.2
24	6	0.2
22	10	0.35
20	10	0.35
18	10	0.5
16	13	0.5

4.8.8 Cut-through Resistance

The mean load measured during the required tests shall not be less than the relevant value specified below:

Wire Size (AWG)	30	28	26	24	22	20	18	16
Cut-through Load (kg)	2	2.5	2.7	3	3.6	4.2	4.75	5.4

4.8.9 Notch Resistance

The depth of notch shall be 0.08mm.

4.8.10 Flammability

No particular conditions are applicable.

4.8.11 Resistance to Fluids

Tests (e) and (f) shall be performed only on finished wires or cores.

4.8.12 Surface Resistance

No particular conditions are applicable.

4.8.13 Abrasion Resistance

The weight to be applied to the needle is specified below:

Wire Size (AWG)	30	28	26	24	22	20	18	16
Scrape Abrasion Load (kg)	450	500	550	650	750	850	925	1000

4.8.14 Soldering

No particular conditions are applicable.

4.8.15 Solderability

No particular conditions are applicable.

4.8.16 Radiation Resistance

No particular conditions are applicable.

4.8.17 Overload Resistance

No particular conditions are applicable.

4.8.18 Long-term Ageing Test

The long-term ageing temperature shall be +200°C.

4.8.19 Anthony and Brown Test

No particular conditions are applicable.

TABLE 2 – ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE

No.	Characteristics	Specification and Test Method	Test Condition	Limits	Unit
1	Conductor Resistance	ESCC No. 3901, Section 9	Para. 9.5	Table 1(a)	Ω/km
2	Spark Test	ESCC No. 3901, Section 9	Para. 9.6	Insulation: 3 Jacket: 1.5	kV
3	Voltage Test	ESCC No. 3901, Section 9	Para. 9.7	Para. 9.7	kV
4	Insulation Resistance	ESCC No. 3901, Section 9	Para. 9.8	Insulation: 5000 Jacket: 30	MΩ.km
5	Surface Resistance	ESCC No. 3901, Section 9	Para. 9.22	125	MΩ.mm