



**CONTACTS, ELECTRICAL, CRIMP, FOR 3401/044  
CONNECTORS**

**ESCC Detail Specification No. 3401/045**

Issue 4	June 2013
---------	-----------



### **LEGAL DISCLAIMER AND COPYRIGHT**

European Space Agency, Copyright © 2013, All rights reserved.

The European Space Agency disclaims any liability or responsibility, to any person or entity, with respect to any loss or damage caused, or alleged to be caused, directly or indirectly by the use and application of this ESCC publication.

This publication, without prior permission of the European Space Agency and provided it is not used for a commercial purpose, may be:

- copied in whole, in any medium, without alteration or modification.
- copied in part, in any medium, provided that the ESCC document identification, comprising the ESCC symbol, document number and document issue, is removed.

**DOCUMENTATION CHANGE NOTICE**

(Refer to <https://escies.org> for ESCC DCR content)

DCR No.	CHANGE DESCRIPTION
795	Specification updated to incorporate editorial changes per DCR.

**TABLE OF CONTENTS**

1	GENERAL	6
1.1	SCOPE	6
1.2	COMPONENT TYPE VARIANTS	6
1.3	MAXIMUM RATINGS	6
1.4	PARAMETER DERATING INFORMATION (FIGURE 1)	6
1.5	PHYSICAL DIMENSIONS	6
2	APPLICABLE DOCUMENTS	8
3	TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	8
4	REQUIREMENTS	8
4.1	GENERAL	8
4.2	DEVIATIONS FROM GENERIC SPECIFICATION	10
4.2.1	Deviations from Special In-process Controls	10
4.2.2	Deviations from Final Production Tests (Chart II)	10
4.2.3	Deviations from Burn-in and Electrical Measurements (Chart III)	10
4.2.4	Deviations from Qualification Tests (Chart IV)	10
4.2.5	Deviations from Lot Acceptance Tests (Chart V)	10
4.3	MECHANICAL REQUIREMENTS	11
4.3.1	Dimension Check	11
4.3.2	Weight	11
4.3.3	Contact Capability	11
4.3.4	Contact Retention (In Insert)	11
4.3.5	Mating and Unmating Forces	11
4.3.6	Insert Retention (In Shell)	11
4.3.7	Jackscrew Retention	11
4.3.8	Contact Insertion and Withdrawal Forces	11
4.3.9	Engagement and Separation Forces	11
4.3.10	Oversize Pin Exclusion	11
4.3.11	Probe Damage	11
4.4	MATERIALS AND FINISHES	11
4.4.1	Shell, Coupling Ring and Nuts	11
4.4.2	Inserts	11
4.4.3	Contacts	12
4.4.4	Contact Retaining Clip	12
4.4.5	Guiding and Locking Devices	12
4.4.6	Magnetism Level	12

4.5	MARKING	12
4.5.1	General	12
4.5.2	The ESCC Component Number	12
4.5.3	Traceability Information	12
4.6	ELECTRICAL MEASUREMENTS	13
4.6.1	Electrical Measurements at Room Temperature	13
4.6.2	Electrical Measurements at High and Low Temperatures (Table 3)	13
4.6.3	Circuits for Electrical Measurements (Figure 4)	13
4.7	BURN-IN TESTS (TABLES 4 AND 5)	13
4.8	ENVIRONMENTAL AND ENDURANCE TESTS	14
4.8.1	Measurements and Inspections on Completion of Environmental Tests	14
4.8.2	Measurements and Inspections at Intermediate Points during Endurance Tests	14
4.8.3	Measurements and Inspections on Completion of Endurance Tests	14
4.8.4	Conditions for Operating Life Test (Part of Endurance Testing)	14
4.8.5	Electrical Circuits for Operating Life Test	14
4.8.6	Conditions for High Temperature Storage Test (Part of Endurance Testing)	14

## 1 GENERAL

### 1.1 SCOPE

This specification details the ratings, physical and electrical characteristics, test and inspection data for Contacts, Electrical, Crimp, Gauge 22, 20, 16, 12 for 3401/044 Connectors.

These contacts shall be packed separately from the connectors and may be procured either with the connectors or separately.

This specification shall be read in conjunction with:

- ESCC Generic Specification No. 3401, Connectors, Electrical, Non-Filtered, Circular and Rectangular,
- ESCC Detail Specification No. 3401/044, Connectors, Electrical, Circular, Bayonet Coupling, Removable Crimp Contacts, Based on MIL-C-38999 Series II,

the requirements of which are supplemented herein.

### 1.2 COMPONENT TYPE VARIANTS

Variants of the different sizes of contacts specified herein, which are also covered by this specification, are scheduled in Table 1(a).

### 1.3 MAXIMUM RATINGS

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the contacts specified herein, are scheduled in Table 1(b).

### 1.4 PARAMETER DERATING INFORMATION (FIGURE 1)

Not applicable.

### 1.5 PHYSICAL DIMENSIONS

The physical dimensions of the contacts specified herein are shown in Figure 2.

**TABLE 1(a) – TYPE VARIANTS**

Variant	Type	Mating End Size	Crimp Barrel Size	Rated Current A	Accept Wire AWG	Max. Weight g	Engagement & Separation				Contact Capability	
							Engag. Forces N (1)	Separ. Forces N (1)	Test Pins Dia. mm		Weight	
									Min.	Max.	Pick-up (2) g	Drop (3) g
01	Male	22	22	5	22	0.08	-	-	-	-	-	-
02	Female					0.11	3.33	0.19	0.773	0.775	-	340.2
							2.22	0.19	0.749	0.751	19.84	-
03	Male	20	20	7.5	20	0.16	-	-	-	-	-	-
04	Female					0.21	5.01	0.19	1.039	1.041	-	510.3
							2.22	0.19	0.99	0.993	19.84	-
05	Male	16	16	13	16	0.33	-	-	-	-	-	-
06	Female					0.42	8.34	0.56	1.611	1.613	-	850.5
							3.5	0.56	1.562	1.564	56.71	-
07	Male	12	12	23	12	0.68	-	-	-	-	-	-
08	Female					0.82	8.34	0.83	2.411	2.413	-	850.5
					14		6.34	0.83	2.362	2.364	85.05	-

Variant	Contact Retention Force Max. N	Contact Insertion and Withdrawal Forces Max. N	Probe Damage			Oversize Pin Excl.		
			Moment N.cm	Probe Dia. mm		Force Max. N	Test Pin Dia. mm	
				Min.	Max.		Min.	Max.
01	44	44	-	-	-	-	-	-
02	44	44	1.34	0.749	0.774	2.45	0.905	0.907
03	67	89	-	-	-	-	-	-
04	67	89	5.64	1.003	1.029	3.33	1.18	1.182
05	111	89	-	-	-	-	-	-
06	111	89	22.56	1.575	1.6	5.49	1.738	1.74
07	111	133	-	-	-	-	-	-
08	111	133	22.56	2.375	2.4	8.24	2.55	2.552

**NOTES:**

- 1st line with maximum diameter test pin; 2nd line with minimum diameter test pin.
- With minimum diameter test pin and minimum insertion depth of 4mm.
- With maximum diameter test pin and minimum insertion depth of 4mm.

**TABLE 1(b) – MAXIMUM RATINGS**

No.	Characteristics	Symbol	Maximum Ratings	Unit
1	Rated Current	$I_{CR}$	See Table 1(a)	A
2	Operating Temperature Range	$T_{op}$	-65 to +200	°C
3	Storage Temperature Range	$T_{stg}$	-65 to +200	°C

**FIGURE 1 – PARAMETER DERATING INFORMATION**

Not applicable

**2 APPLICABLE DOCUMENTS**

The following documents form part of this specification and shall be read in conjunction with it:

- (a) ESCC Generic Specification No. 3401, Connectors, Electrical, Non-Filtered, Circular and Rectangular.
- (b) ESCC Detail Specification No. 3401/044, Connectors, Electrical, Circular, Bayonet Coupling, Removable Crimp Contacts, Based on MIL-C-38999 Series II.

**3 TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS**

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESCC Basic Specification No. 21300 shall apply.

**4 REQUIREMENTS****4.1 GENERAL**


The complete requirements for procurement of the contacts specified herein are stated in this specification and ESCC Generic Specification No. 3401. Deviations from the Generic Specification, applicable to this specification only, are listed in Para. 4.2.

Deviations from the applicable Generic Specification and this Detail Specification, formally agreed with specific Manufacturers on the basis that the alternative requirements are equivalent to the ESCC requirements and do not affect the components' reliability, are listed in the appendices attached to this specification.



**FIGURE 2 – PHYSICAL DIMENSIONS**

VARIANTS WITH UNEVEN NUMBERS – MALE CONTACT

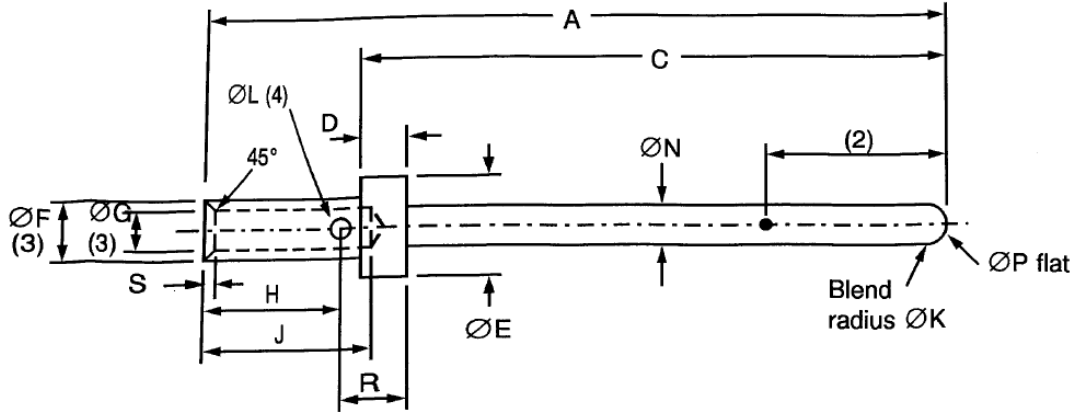


Type Variant		A	C	D	ØE	ØF	ØG	H	J	ØK	ØL	ØN	ØP	R	S
01	Min.	-	7.49	0.74	1.52	1.17	0.85	3.09	3.58	0.25	0.46	0.75	-	-	0.08
	Max.	13.64	7.62	0.84	1.57	1.22	0.9	3.27	3.99	0.51	0.56	0.77	0.2	-	0.13
03	Min.	-	7.49	0.74	2.31	1.73	1.17	-	5.31	0.38	0.66	0.99	-	1.82	0.13
	Max.	13.64	7.62	0.84	2.39	1.78	1.22	-	5.82	0.64	0.81	1.04	0.38	1.98	0.25
05	Min.	-	7.49	0.74	3.23	2.57	1.68	-	5.31	0.51	0.91	1.56	0.28	2.08	0.13
	Max.	13.64	7.62	0.84	3.3	2.62	1.73	-	5.82	0.64	1.02	1.61	0.76	2.24	0.25
07	Min.	-	7.49	0.74	4.55	3.76	2.49	-	5.31	0.51	0.91	2.36	1.09	2.08	0.13
	Max.	13.64	7.62	0.84	4.62	3.84	2.59	-	5.82	0.64	1.07	2.41	1.57	2.24	0.25

**NOTES:**

1. All dimensions are in millimetres.
2. Measurement point for plating thickness: 4±1.
3. ØF and ØG to be concentric within 0.05 TIR.
4. Inspection hole shall only penetrate one wall of the crimp barrel.

VARIANTS WITH EVEN NUMBERS – FEMALE CONTACT

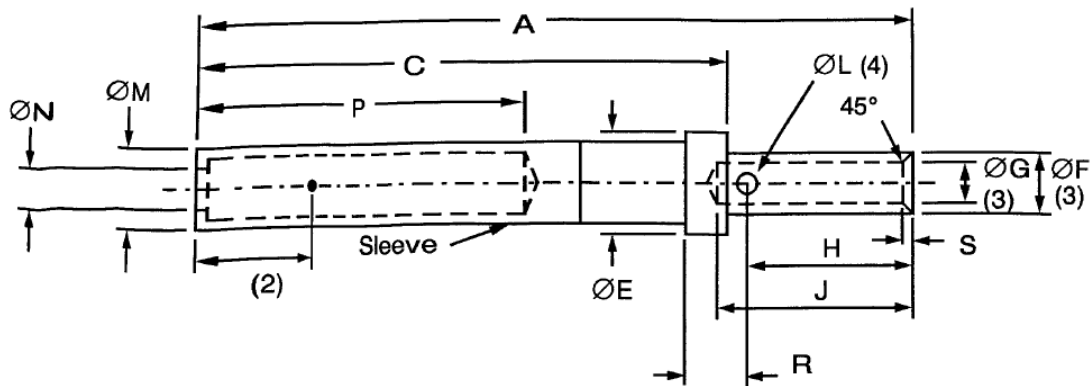

Type Variant		A	C	ØE	ØF	ØG	H	J	ØL	ØM	ØN	P	R	S
02	Min.	-	7.08	1.52	1.17	0.85	3.09	3.58	0.46	-	0.78	4.22	-	0.08
	Max.	13.41	7.34	1.57	1.22	0.9	3.27	3.99	0.56	1.57	-	-	-	0.13
04	Min.	-	7.08	2.31	1.73	1.17	-	5.31	0.66	-	1.05	4.22	1.82	0.13
	Max.	13.41	7.34	2.39	1.78	1.22	-	5.82	0.81	1.98	-	-	1.98	0.25
06	Min.	-	7.08	3.23	2.57	1.68	-	5.31	0.91	-	1.63	4.22	2.08	0.13
	Max.	13.41	7.34	3.3	2.62	1.73	-	5.82	1.02	2.87	-	-	2.24	0.25
08	Min.	-	7.08	4.55	3.76	2.49	-	5.31	0.91	-	2.42	4.22	2.08	0.13
	Max.	13.41	7.34	4.62	3.84	2.59	-	5.82	1.07	4.09	-	-	2.24	0.25

**NOTES:**

1. All dimensions are in millimetres.
2. Measurement point for plating thickness: 2±1.
3. ØF and ØG to be concentric within 0.05 TIR.
4. Inspection hole shall only penetrate one wall of the crimp barrel.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Special In-process Controls

None.

4.2.2 Deviations from Final Production Tests (Chart II)

None.

4.2.3 Deviations from Burn-in and Electrical Measurements (Chart III)

Chart III is not applicable.

4.2.4 Deviations from Qualification Tests (Chart IV)

(a) Para. 9.31, Solderability: Not applicable.

4.2.5 Deviations from Lot Acceptance Tests (Chart V)

(a) Para. 9.31, Solderability: Not applicable.

### 4.3 MECHANICAL REQUIREMENTS

#### 4.3.1 Dimension Check

The dimensions of the contacts specified herein shall be verified in accordance with the requirements set out in Para. 9.6 of ESCC Generic Specification No. 3401 and shall conform to those shown in Figure 2 of this specification.

#### 4.3.2 Weight

The maximum weight of the contacts specified herein shall be as specified in Table 1(a).

#### 4.3.3 Contact Capability

For the purpose of this test, the pick-up and drop weights shall be as specified in Table 1(a).

#### 4.3.4 Contact Retention (In Insert)

The contact retention force shall be as specified in Table 1(a).

#### 4.3.5 Mating and Unmating Forces

As specified in ESCC Detail Specification No. 3401/044.

#### 4.3.6 Insert Retention (In Shell)

As specified in ESCC Detail Specification No. 3401/044.

#### 4.3.7 Jackscrew Retention

As specified in ESCC Detail Specification No. 3401/044.

#### 4.3.8 Contact Insertion and Withdrawal Forces

The contact insertion and withdrawal forces shall be as specified in Table 1(a).

#### 4.3.9 Engagement and Separation Forces

The diameter of the test pin and the engagement and separation forces of the female contacts shall be as specified in Table 1(a).

#### 4.3.10 Oversize Pin Exclusion

The diameter of the test pin and the force applied to it shall be as specified in Table 1(a).

#### 4.3.11 Probe Damage

The probe diameter and the moment at the end of the probe shall be as specified in Table 1(a).

### 4.4 MATERIALS AND FINISHES

The materials and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the components specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

#### 4.4.1 Shell, Coupling Ring and Nuts

As specified in ESCC Detail Specification No. 3401/044.

#### 4.4.2 Inserts

As specified in ESCC Detail Specification No. 3401/044.

#### 4.4.3 Contacts

The contact body shall be made of copper base alloy selected from raw materials with a underplate minimum of impurities. It shall be plated as follows:

- 1 $\mu$ m minimum nickel underplate.
- 1.27 $\mu$ m minimum gold plate.

#### 4.4.4 Contact Retaining Clip

As specified in ESCC Detail Specification No. 3401/044.

#### 4.4.5 Guiding and Locking Devices

Not applicable.

#### 4.4.6 Magnetism Level

As specified in ESCC Detail Specification No. 3401/044.

### 4.5 MARKING

#### 4.5.1 General

The marking of all components delivered to this specification shall be in accordance with the requirements of ESCC Basic Specification No. 21700 and the following subparagraphs.

These components being too small to accommodate the marking as specified hereafter, the full marking information shall accompany each lot of components in its primary package. Such marking shall comprise:

- (a) The ESCC Component Number.
- (b) Traceability information.

#### 4.5.2 The ESCC Component Number

Each component shall bear the ESCC Component Number which shall be constituted and marked as follows:

Example: 340104501B

- Detail Specification Number: 3401045
- Type Variant (see Table 1(a)): 01
- Testing Level: B.

#### 4.5.3 Traceability Information

Traceability information shall be marked in accordance with the requirements of ESCC Basic Specification No. 21700.

#### 4.6 ELECTRICAL MEASUREMENTS

##### 4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured in respect of electrical characteristics are scheduled in Table 2. Unless otherwise specified, these measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

##### 4.6.2 Electrical Measurements at High and Low Temperatures (Table 3)

Not applicable.

##### 4.6.3 Circuits for Electrical Measurements (Figure 4)

Not applicable.

#### 4.7 BURN-IN TESTS (TABLES 4 AND 5)

Not applicable.

**TABLE 2 – ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE**

No.	Characteristics	Symbol	Specification and/or Test Method	Test Condition	Variants	Limits		Unit
						Min.	Max.	
1	Contact Resistance (Low Level Current)	Rcl	ESCC No. 3401 Para. 9.1.1.3	Para. 9.1.1.3	All	-	8	mΩ
2	Contact Resistance (Rated Current)	Rcr	ESCC No. 3401 Para. 9.1.1.3	Para. 9.1.1.3				mΩ
				5A	01, 02	-	14	
				7.5A	03, 04	-	7	
				13A	05, 06	-	4	
				23A	07, 08	-	3.5	

**TABLES 3, 4 AND 5**

Not applicable

4.8 ENVIRONMENTAL AND ENDURANCE TESTS

4.8.1 Measurements and Inspections on Completion of Environmental Tests

The parameters to be measured and inspections to be performed on completion of environmental testing are scheduled in Table 6. Unless otherwise specified, these measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests

Not applicable.

4.8.3 Measurements and Inspections on Completion of Endurance Tests

The parameters to be measured and inspections to be performed on completion of endurance tests shall be those specified in Table 6. Unless otherwise specified, these measurements shall be performed at  $T_{amb} = +22 \pm 3$  °C.

4.8.4 Conditions for Operating Life Test (Part of Endurance Testing)

Not applicable.

4.8.5 Electrical Circuits for Operating Life Test

Not applicable.

4.8.6 Conditions for High Temperature Storage Test (Part of Endurance Testing)

The requirements for the high temperature storage test are specified in Section 9 of ESCC Generic Specification No. 3401. The conditions for high temperature storage testing shall be the maximum storage temperature specified in Table 1(b) of this specification.

**TABLE 6 – MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTS**

No.	ESCC Generic No. 3401		Measurements and Inspections		Symbol	Limits		Unit
	Environmental and Endurance Tests (1)	Test Method and Conditions	Identification	Conditions		Min.	Max.	
01	Wiring	Para. 9.10 & Table 1(a) of this spec.	Low Level Contact Resistance	Table 2 Item 1	Rcl	Table 2 Item 1		
02	Vibration	Para. 9.11	ESCC 3401/044					
03	Shock or Bump	Para. 9.12	ESCC 3401/044					
04	Climatic Sequence	Para. 9.13	ESCC 3401/044					
05	Seal Test	Para. 9.9	ESCC 3401/044					
06	Plating Thickness	Para. 9.14	Thickness	-	-	Para. 4.4.3 of this spec		
07	Joint Strength	Para. 9.15	ESCC 3401 Para. 9.15					
08	Rapid Change of Temperature	Para. 9.16	ESCC 3401/044					
09	Contact Retention (in Insert)	Para. 9.17 & Para. 4.3.4 of spec.	Contact Displacement	-	-	ESCC 3401 Para. 9.17		
10	Endurance	Para. 9.18	<b>Initial Measurements</b> Low Level Contact Resistance	Table 2 Item 1	Rcl	Record Values		mΩ
			<b>Final Measurements</b> Low Level Contact Resistance Drift	Table 2 Item 1	ΔRcl	-	3	mΩ
11	Permanence of Marking	Para. 9.19	As applicable					
12	Mating/Unmating Forces	Para. 9.20	ESCC 3401/044					
13	High Temperature Storage	Para. 9.21	<b>Initial Measurements</b> Low Level Contact Resistance	Table 2 Item 1	Rcl	Record Values		mΩ
			<b>Final Measurements</b> Low Level Contact Resistance Drift	Table 2 Item 1	ΔRcl	-	3	mΩ
			Rated Current Contact Resistance	Table 2 Item 2	Rcr	Table 2 Item 2		
			Contact Retention (in Insert)	Para. 4.3.4 of this spec.	-	ESCC 3401 Para. 9.17		
14	Corrosion	Para. 9.22	Visual Examination	-	-	-	-	
15	Insert Retention (in Shell)	Para. 9.23 & Para. 4.3.6 of this spec.	ESCC 3401/044					
16	Jackscrew Retention	Para. 9.24 & Para. 4.3.7 of this spec.	ESCC 3401/044					

No.	ESCC Generic No. 3401		Measurements and Inspections		Symbol	Limits		Unit
	Environmental and Endurance Tests (1)	Test Method and Conditions	Identification	Conditions		Min.	Max.	
17	High Temperature Measurements	Para. 9.25	ESCC 3401/044					
18	Overload Test	Para. 9.26	Rated Current Contact Resistance	Table 2 Item 2	Rcr	Table 2 Item 2		
19	Maintenance Aging	Para. 9.27	Visual Examination	-	-	-	-	
			Contact Retention	Para. 4.3.4 of this spec.	-	ESCC 3401 Para. 9.17		
			Contact Insertion & Withdrawal Forces	Para. 4.3.8 of this spec.	-	Para. 4.3.8		
20	Engage/Separation Forces	Para. 9.28 & Para. 4.3.9 of this spec.	Force	-	-	Para. 4.3.9		
21	Oversize Pin Exclusion	Para. 9.29 & Para. 4.3.10 of this spec.				ESCC 3401 Para. 9.29		
22	Probe Damage	Para. 9.30 & Para. 4.3.11 of this spec.	Contact Separation Force	Para. 4.3.9 of this spec.	-	Para. 4.3.9		
23	Solderability	Para. 9.31 & Para. 4.3.12 of this spec.	Not applicable					

**NOTES:**

1. The tests in this Table refer to either Chart IV or V and shall be used as applicable.