



SHELL SIZE F
STANDARD MOUNTING HOLES
FIXED MOUNT

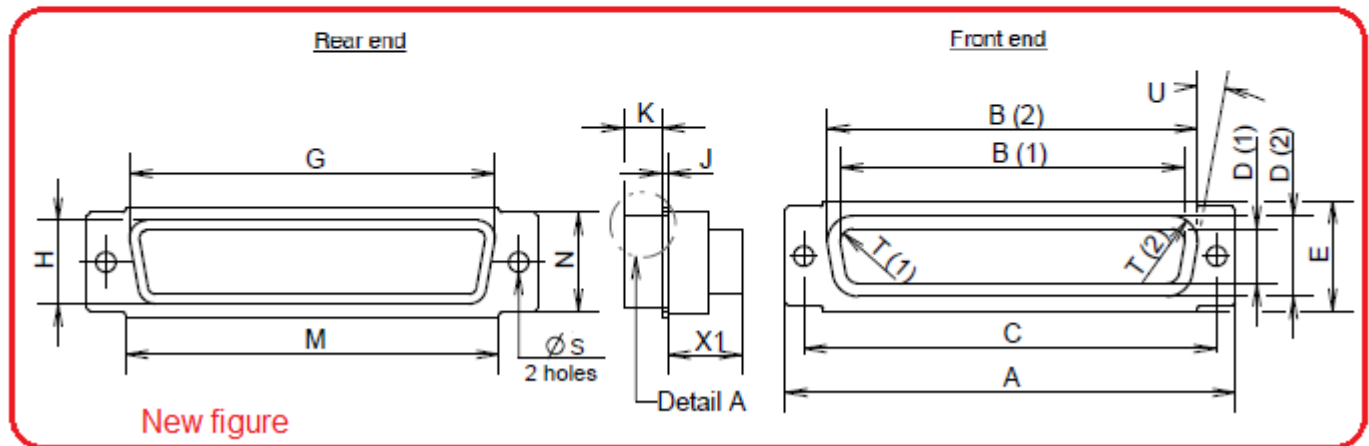

DETAIL A



Contact Type	Connector Type	Symbol/Dim.	A	B	C	D	E	E'	F	G	H	J	K	M	N	Øs	I	U	V	X1
Male	Plug	Min	68.94	56.06	63.37	12.65	16.92	14.99	5.17	<u>58.75</u>	15.45	0.74	5.69	<u>57.25</u>	<u>15</u>	2.92	2.59	9	0	-
		Max	69.7	56.31	63.63	12.9	17.68	15.75	5.43	<u>59.25</u>	15.95	1.24	5.99	<u>57.75</u>	<u>15.5</u>	3.2	2.69	11	0.6	9.53
Female	Receptacle	Min	68.94	55.47	63.37	12.19	16.92	14.99	5.17	<u>58.75</u>	15.45	0.51	6.05	<u>57.25</u>	<u>15</u>	2.92	2.46	9	-	-
		Max	69.7	55.73	63.63	12.45	17.68	15.75	5.43	<u>59.25</u>	15.95	1.02	6.3	<u>57.75</u>	<u>15.5</u>	3.2	2.62	11	-	9.53

NOTES

1. Inside dimension for connectors with male contacts.
2. Outside dimension for connectors with female contacts.
3. All dimensions are in millimetres (angles in degrees).
4. Underlined dimensions, in table, are critical to ensure intermateability.

Delete "E" and "F" column and added "M" and "N" columns
Change "G" from 57.25 - 57,75 to 58.75 - 59.25